

Practical Care Products

Independent showering and living aids

Welcome to our independent showering and living aids brochure

At Practical Care Products (PCP) we specialise in products to help people who are less able, particularly in the bathing and showering environment. Over the last 10 years, we have established a reputation for quality products supplied at reasonable prices, servicing Local Authorities, Housing Associations, Technical Officers, Architects, Builders, Occupational Therapists, Nursing & Care Homes as well as Private Clients.

Quality

PCP aims to provide a range of quality products for use in the home. Most are covered by extended warranty periods as standard. If there are questions regarding product quality, we have a no quibble guarantee policy.

Service

PCP is committed to providing a first class service. Most of our products are held in stock at our Malvern warehouse ready for immediate distribution throughout the UK & Eire.

Telephone

01886 830119

Email

info@practicalcareproducts.com

Surveying & Design

We offer a complete Surveying Service for any Bathroom Adaptation required. A member of our experienced staff will personally visit to take measurements to produce a computer aided design. We will take into account all requirements of the user and any constraints of the building to produce the best possible solution to meet the client's needs.

If you require sales or technical assistance then please do not hesitate to contact us.

Facsimilie

01886 830118

Visit our website

www.practicalcareproducts.com



Grab & Support Rails

"Easy Feel", steel & soft grip, support rails

4-11

Shower Seats

Wall mounted & free-standing

12-17

Level Access Showering

Level-Dec, Level-Dec Advance, Level Grade, waste drainage

18-27

Low Access Showering

Blackdown, Quantock & Mendip shower trays

28-35

Shower Doors & Screens

Half height doors & glass screens

36-45

Swift-Fit Free Standing Shower Cubicles

Impress, Snowdon & Snowdon Toilet Cubicle

46-53

Bathroom Accessories

Shower units & shower mixers, curtains, curtain rails

54-59

Walk-in Baths

Baths, screen, taps

60-63

Shower/Changing Tables

Shower/changing tables

64-65

Rise & Fall Baths

Isis & Vanna

66-67

Specialist Sanitary Aids

Clos-o-Mat, Geberit, commodes & plinths

68-74

"Easy Feel" Grab Rails



Steel & Soft Grip Rails



Support Rails



The Practical Care Products “Easy Feel” plastic fluted grab rail is available in a variety of sizes, colours and angles. The range includes rails with covered flanges and flat ended fixing flanges suitable for indoor and outdoor use.

Our range of steel, stainless steel, chrome and soft grip rails ensure that all requirements are met in and around the home.


For extra peace of mind we offer a range of support rails for your safety, comfort and independence around the home.

"Easy Feel" Grab Rails

STRAIGHT WHITE & COLOURED




Easily removable flange cover.

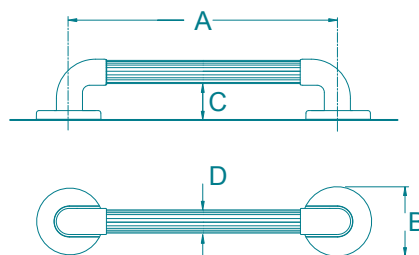

Product Ref	A	B	C	D
GR30031	300	92	50	31
GR45031	450	92	50	31
GR60031	600	92	50	31
GR90035	900	92	58	35




FLAT ENDED FIXING

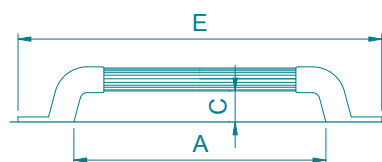

Product Ref	A	B	C	D	E
GR30031FE	300	32	50	31	430
GR45031FE	450	32	50	31	580


"Easy Feel" Grab Rails

45° WHITE & COLOURED

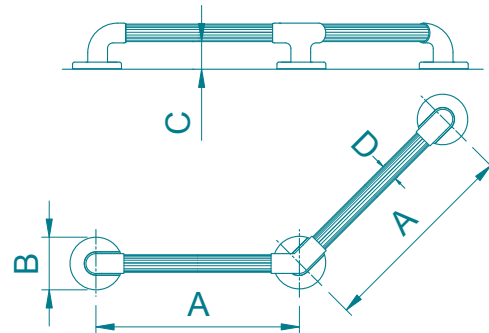

Product Ref	A	B	C	D
GR300X30031-45	300	92	50	31
GR450X45031-45	450	92	50	31
GR600X60031-45	600	92	50	31

90° WHITE & COLOURED

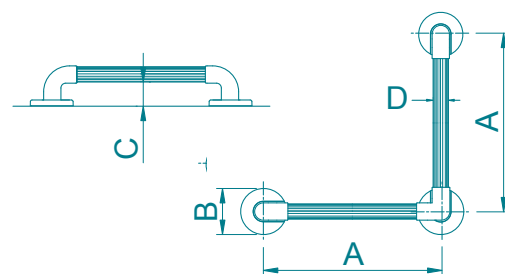

Product Ref	A	B	C	D
GR300X30031-90	300	92	50	31
GR450X45031-90	450	92	50	31
GR600X60031-90	600	92	50	31


We suggest that installation of grab rails is always carried out by a suitably qualified trades person. The selection and use of appropriate wall fixings will vary depending upon the type of wall and the conditions of the wall in each individual circumstance.

Steel Rails

Designed to make installation even easier

FLAT ENDED STRAIGHT


(WHITE)



Product Ref	A	B	C	D	E
GR30025FE	200	40	30	25	300
GR45025FE	300	40	38	25	460
GR60025FE	450	40	48	25	615

FLAT ENDED OFFSET

(WHITE)

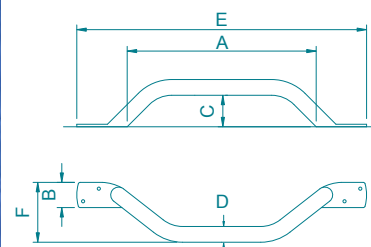

Product Ref	A	B	C	D	E	F
GR45025FEOS	310	40	38	25	460	60
GR60025FEOS	450	40	43	25	590	65

OPEN FLANGED STEEL RAILS

(POWDER COATED WHITE)



Available in 4 lengths, 25 mm diameter tube with open flanges and 3 fixing points.

Product Ref	Length
GR30025PCW	300 mm
GR45025PCW	450 mm
GR60025PCW	600 mm
GR90025PCW	900 mm

OPEN FLANGED STEEL RAILS

(CHROME PLATED)



Available in 4 lengths, 25 mm diameter tube with open flanges and 3 fixing points.

Product Ref	Length
GR30025CHR	300 mm
GR45025CHR	450 mm
GR60025CHR	600 mm
GR90025CHR	900 mm

OPEN FLANGED KNURLED RAILS

(STAINLESS STEEL)



Available in 3 lengths, 25 mm diameter knurled tube with open flanges and 3 fixing points. (Alternative lengths and flange covers are available on "made to order" basis).

Product Ref	Length
GR30025SSR	300 mm
GR45025SSR	450 mm
GR60025SSR	600 mm


Steel & Soft Grip Rails

NEWEL RAILS



Steel powder coated white.
Fit to Newel posts of staircase
with 3 fixing points. Left & Right
handed available.

Left hand illustrated.

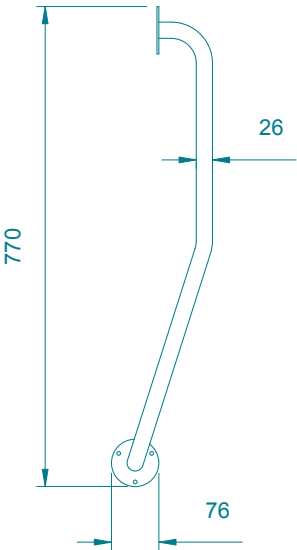

"PRIMA" SOFT GRIP GRAB RAILS

The "Prima" rails feature integral soft grip mouldings to aid grip. Each rail is manufactured as a single piece unit with an Aluminium tube core. The ergonomic grip is comfortable and warm to the touch.

Available in 6 sizes, as a Mint/White (MW) or an all White (WW) combination.

4 straight rails, oval shaped 35 mm maximum width with concealed flanges and 2 offset fixing points.

Product Ref	Length
GR30035PRIMAMW/WW	300 mm
GR45035PRIMAMW/WW	450 mm
GR50035PRIMAMW/WW	500 mm
GR60035PRIMAMW/WW	600 mm

2 Angled Rails 45°, oval shaped 35 mm maximum width with concealed flanges and 2 offset fixing points.




Product Ref	Dimensions
GR175X17535PRIMAMW/WW	175x175 mm
GR250X25035PRIMAMW/WW	250x250 mm

Hinged Support Rails


Standard and heavy duty

HSRLEGPCW690X28 Wall mounted hinged support rail, 690 mm projection from wall

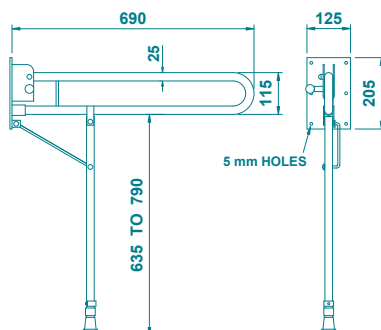


- Steel powder coated white
- Adjustable height folding leg
- Spring loaded locking mechanism when raised for added safety.

HSRPCW690X28 Wall mounted hinged support rail, 690 mm projection from wall

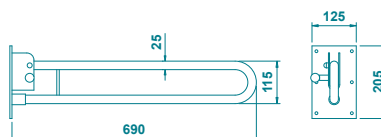

- Steel powder coated white
- Spring loaded locking mechanism when raised for added safety.

HSRLEGPCW740X28 Wall mounted hinged support rail, 740 mm projection from wall

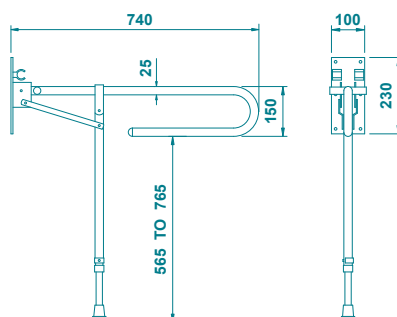


- Steel powder coated white
- Adjustable height folding leg
- Clip retention of hinged rail when raised for added safety.


Heavy Duty Hinged Support Rails

All of our standard heavy duty hinged support rails are steel powder coated white and have a heavy duty cast aluminium wall mounting plate.

HSRLEGPCW765X28HD 765 mm projection from wall

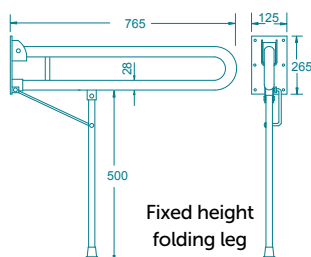

HSRPCW760X32HD 760 mm projection from wall

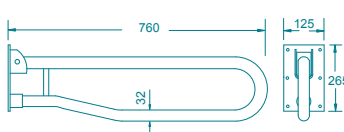

HSRPCW765X28HD 765 mm projection from wall




Additional items available with Heavy Duty rails "made to order" items:

- Detachable toilet roll holder
- Alternative colours
- Manufacture in stainless steel

Support Rails

FCP2750 Floor to Ceiling Pole

Steel, plastic ribbed for non slip surface. 35 mm diameter, 2750 mm long, with 1 fixed & 1 loose flange. Pole can be cut down on site if required.

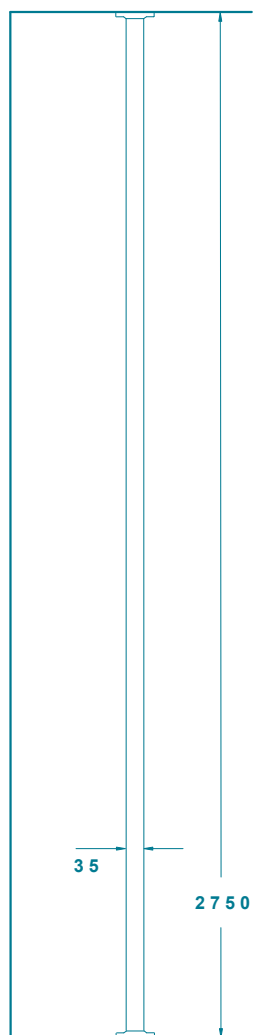

FCPEXTENSION Floor to Ceiling Pole Extension


For use with floor to ceiling poles supplied with doors sets only, 600 mm long. (See Pages 38-40)



FWP740X700 Floor to Wall Rail

Steel powder coated white


740 x 700 mm, with fixed flanges. 3 hole flange fixing.

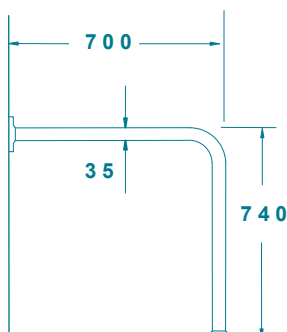

FWP740X700PVCR Floor to Wall Pole (with ribbing)

Steel powder coated white

740 x 700 mm, with fixed flanges. 3 hole flange fixing with plastic ribbed sleeving and in stainless steel as "made to order" items.

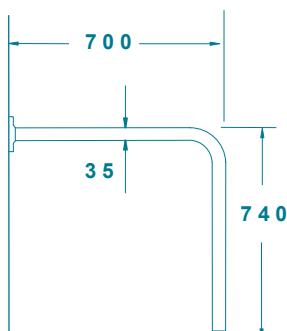

HSRFMC

Floor mounted column



To suit any heavy duty hinged rail

Wall Mounted Shower Seats



Wall Mounted Shower Seats Heavy Duty/Extra Wide



Free Standing Shower Chairs & Stools



Our shower seat range offers quality, function and great value. Seats are available unpadded or with a choice of blue or grey padding, fully height adjustable support legs and independently articulating arms to ensure your safety and comfort whilst showering.

A range of wall mounted seats of fold down design, all with retractable legs, fully height adjustable, with and without back and armrests, specifically designed for clients where extra support is required.

Where a wall mounted seat is not appropriate, we offer a range of free standing shower chairs and perching stools for your comfort.

Wall Mounted Shower Seats


Fold Down Hinged Seats with Supporting Legs

Key features

- Wide variety of seat types to suit most clients needs
- Height adjustable support legs with locking pin provides complete horizontal seat position
- Large wall mounting surface and extending support legs give excellent rigidity when installed
- Hard wearing plastic moulded seats with drainage holes for easy cleaning
- Removable moulded seats
- Aluminium frame, powder coated for strength and durability
- Corrosion resistant stainless steel fixings as standard
- All seats have a weight capacity of over 150 kgs

LS490


Depth from wall when folded 150 mm
Weight capacity 160 kgs

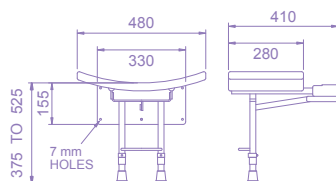

Fold down shower seat, wall mounted. Aluminium frame with adjustable height supporting legs, white powder coated. Blow moulded white easy to clean seat with built in support handles.

LS463


Depth from wall when folded 90 mm
Weight capacity 190 kgs

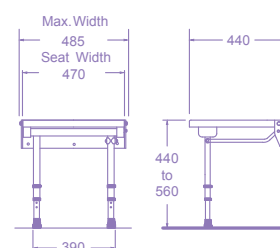

Fold down shower seat, wall mounted. Aluminium frame with adjustable height supporting legs, white powder coated.

LP463BL


Depth from wall when folded 95 mm
Weight capacity 190 kgs

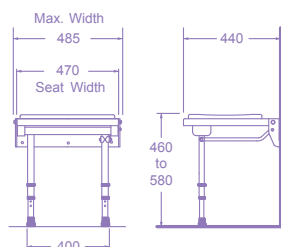

Fold down shower seat, blue seat pad, wall mounted. Aluminium frame with adjustable height supporting legs, white powder coated.

LP463GR

Depth from wall when folded 95 mm
Weight capacity 190 kgs

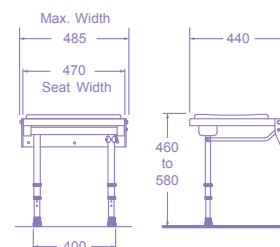


Fold down shower seat, pale grey seat pad, wall mounted. Aluminium frame with adjustable height supporting legs, white powder coated.

Wall Mounted Shower Seats

Fold Down Hinged Seats with Supporting Legs, Back & Arms

BS482BL


Depth from wall when folded 160 mm
Weight capacity 190 kgs

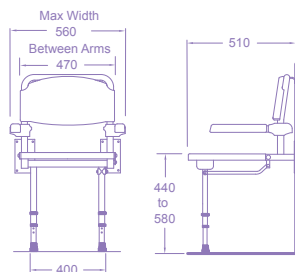

Fold down shower seat, wall mounted. Aluminium frame, white powder coated, adjustable height supporting legs, blue padded back rest and independently articulating blue padded arms rests.

BS482GR


Depth from wall when folded 160 mm
Weight capacity 190 kgs

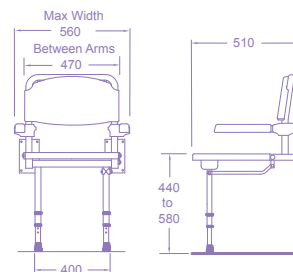

Fold down shower seat, wall mounted. Aluminium frame, white powder coated, adjustable height supporting legs, pale grey padded back rest and independently articulating pale grey padded arms rests.

BP482BL


Depth from wall when folded 170 mm
Weight capacity 190 kgs

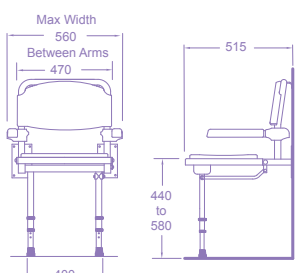

Fold down shower seat, blue seat pad, wall mounted. Aluminium frame, white powder coated, adjustable height supporting legs, blue padded back rest and independently articulating blue padded arms rests.

BP482GR

Depth from wall when folded 170 mm
Weight capacity 190 kgs

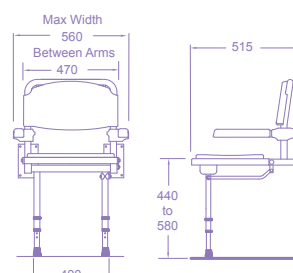

Fold down shower seat, pale grey seat pad, wall mounted. Aluminium frame, white powder coated, adjustable height supporting legs, pale grey padded back rest and independently articulating pale grey padded arms rests.

Adjustable height support legs




Wall Mounted Shower Seats

Heavy duty, extra wide

BP539


Depth from wall when folded 180 mm
Weight capacity 190 kgs

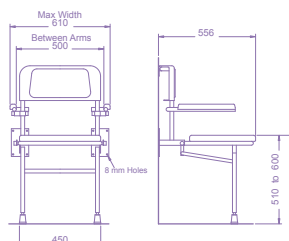

Fold down padded shower seat, wall mounted. Aluminium frame with adjustable height supporting legs, independently articulating arm rests, white powder coated with light grey padded back & seat.

BP539HS


Depth from wall when folded 180 mm
Weight capacity 190 kgs

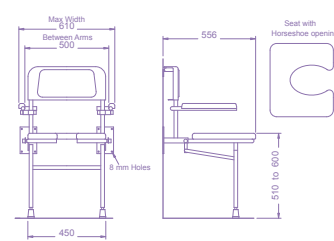

Fold down padded open fronted "Horse Shoe" shower seat, wall mounted. Aluminium frame with adjustable height supporting legs, independently articulating arm rests, white powder coated with light grey padded back & seat.

LP620BL

Depth from wall when folded 210 mm
Weight capacity 222 kgs

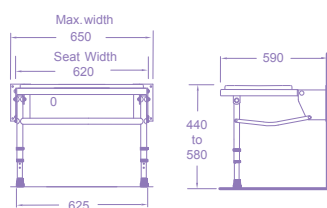


EXTRA WIDE

Fold down shower seat, wall mounted. Aluminium frame, with adjustable height supporting legs, back and arm rests, white powder coated seat padding available in blue.

BP620BL

Depth from wall when folded 230 mm
Weight capacity 222 kgs

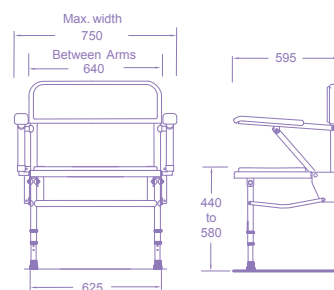

EXTRA WIDE

Fold down padded shower seat, wall mounted. Aluminium frame, with adjustable height supporting legs, back and arm rests, white powder coated. Back and seat padding available in blue.

Free Standing Stools & Chairs

PSC Weight capacity 190 kgs




Portable shower chair with fixed arms. Fixed height. Heavy Duty steel frame, powder coated white. White plastic seat.

PSCLEG Weight capacity 140 kgs




Portable shower chair with fixed arms. Adjustable height supporting legs. Steel frame, powder coated white. White plastic seat.

PSC490 Weight capacity 100 kgs

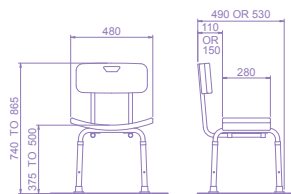


Portable shower chair. Aluminium frame with adjustable height supporting legs. Blow moulded white easy to clean back rest & seat with built in support handles.

PSS490 Weight capacity 100 kgs




Portable shower stool. Aluminium frame with adjustable height supporting legs. Blow moulded white easy to clean seat with built in support handles.

PSS Weight capacity 100 kgs




Portable shower stool. Aluminium frame with adjustable height supporting legs. Blow moulded light grey easy to clean circular seat.


Level-Dec

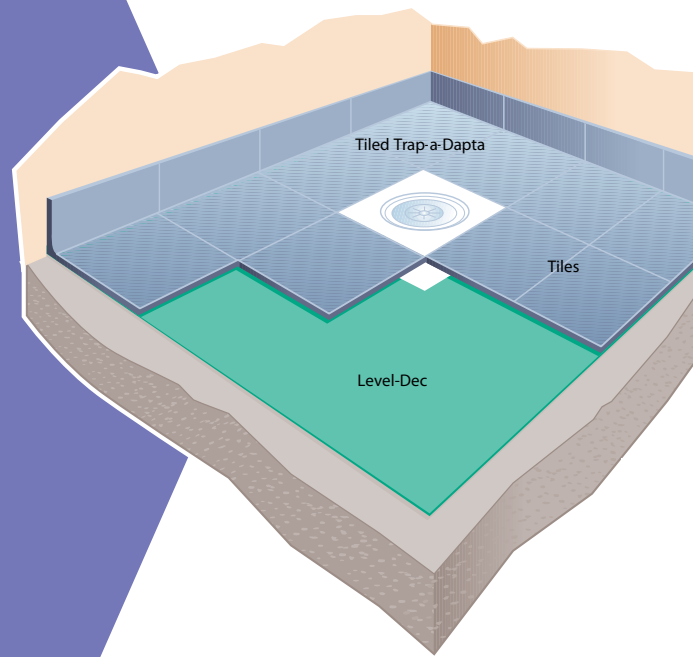

Level-Dec Advance

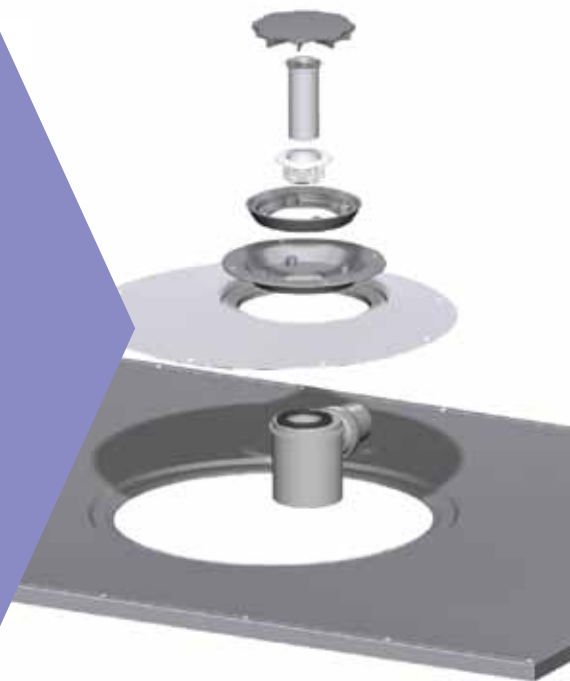

Level Grade

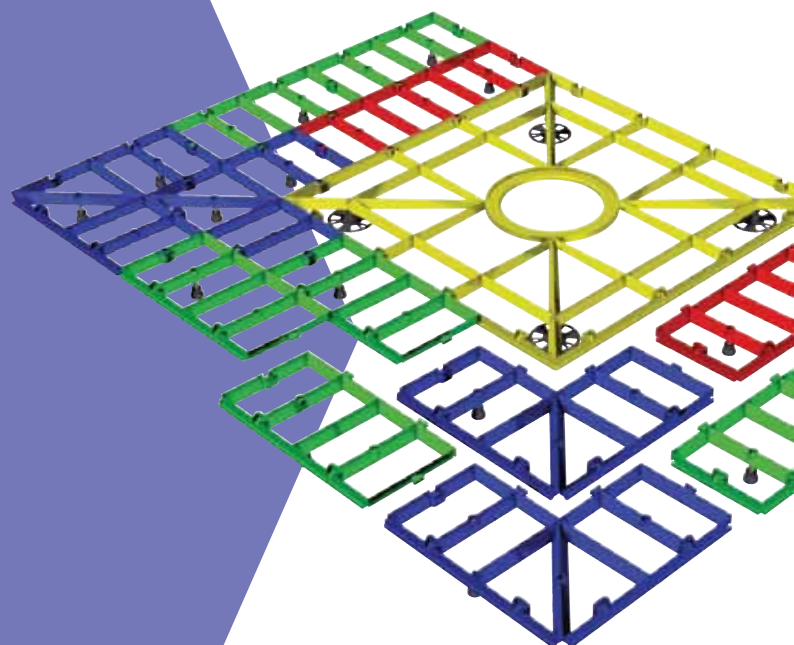

The Level-Dec wet room floor formers are pre-formed to give a “real” level access shower base that, when set into the floor, can either be completely covered with non-slip vinyl flooring or tiles, thus providing a step free and unrestricted shower area.

With all the features and benefits offered by the Level-Dec, the Level-Dec Advance has the added bonus of its unique revolutionary drainage feature, allowing variable positioning for the gully, avoiding any joists and making installation quicker and easier.


Made from colour coded modular sections that click together to form a grid like structure, the Level Grade is designed to produce a consistent gradient to screeded concrete floors with ease every time.

Level-Dec Size Options



LEVEL-DEC 1


1300 x 800mm

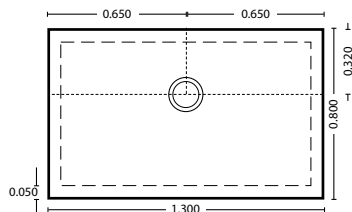

Max Shower Area
up to 1250 x 750mm
Trimable Area
up to 30mm on
perimeters
Handing
Reversible
Pump Accommodation
Bottom Suction

LEVEL-DEC 2


1000 x 1000mm

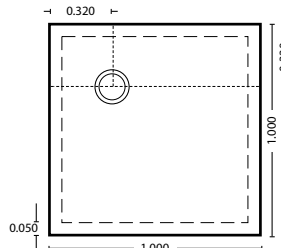

Max Shower Area
up to 950 x 950mm
Trimable Area
up to 30mm on
perimeters
Handing
Reversible
Pump Accommodation
Bottom Suction

LEVEL-DEC 3


1500 x 800mm

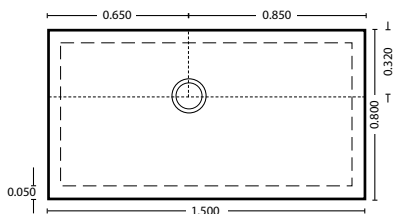

Max Shower Area
up to 1450 x 750mm
Trimable Area
up to 30mm on
perimeters
Handing
Reversible
Pump Accommodation
Bottom Suction

LEVEL-DEC 4


900 x 900mm



Max Shower Area
up to 850 x 850mm
Trimable Area
up to 30mm on
perimeters
Handing
Corner Drainage Only
Pump Accommodation
Bottom & Top Suction

LEVEL-DEC 5


800 x 800mm



Max Shower Area
up to 750 x 750mm
Trimable Area
up to 30mm on
perimeters
Handing
Corner Drainage Only
Pump Accommodation
Bottom & Top Suction

LEVEL-DEC 6


1400 x 900mm

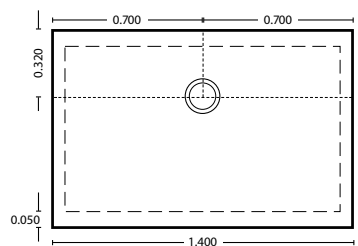

Max Shower Area
up to 1350 x 850mm
Trimable Area
up to 30mm on
perimeters
Handing
Reversible
Pump Accommodation
Bottom Suction

LEVEL-DEC 7


1200mm x 1200mm



Max Shower Area
up to 1150 x 1150mm
Trimable Area
up to 30mm on
perimeters
Handing
Reversible
Pump Accommodation
Bottom Suction

LEVEL-DEC 8

1850 x 900mm

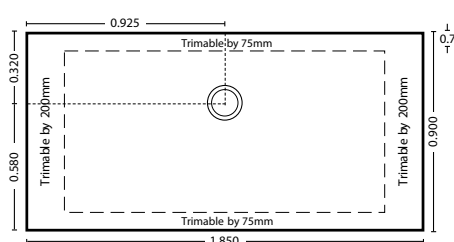


Max Shower Area
Adjustable
Trimable Area
As marked on
drawing
Handing
Reversible
Pump
Accommodation
Bottom Suction

Level-Dec Size Options

LEVEL-DEC 9

1700 x 1700mm

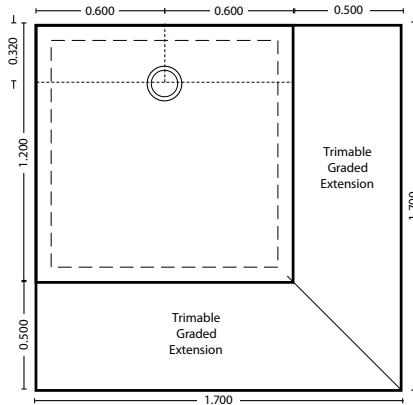


Max Shower Area
up to 1150 x 1150mm
Trimmable Area
Only to extensions
Handing
Reversible

Pump Accommodation
Bottom Suction
Separate Trimmable Area
25 to 22mm

Level-Dec 9 is the same as Level-Dec 7, the only difference is that 9 comes with mitred 500mm extensions to extend the shower area to 1700mm x 1700mm. The purpose of the extensions is to eliminate difficulty with very uneven floors.

LEVEL-DEC 14

1700 x 750mm

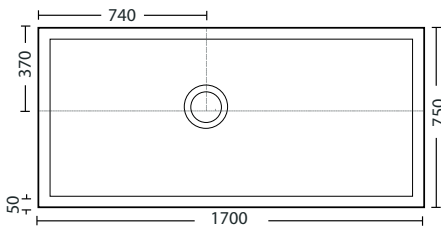


Max Shower Area
up to 1650 x 720mm
Trimmable Area
up to 30mm on perimeters

Handing
Reversible
Pump Accommodation
Bottom Suction

LEVEL-DEC 15

1700 x 850mm

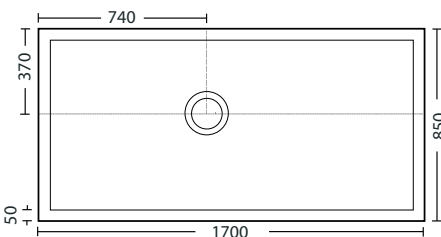

Max Shower Area
up to 1650 x 820mm
Trimmable Area
up to 30mm on perimeters

Handing
Reversible
Pump Accommodation
Bottom Suction

All Level-Decs are 22 mm thick with a pre formed gradient of 17 mm within the showering area.





Installation instructions available on our website.
www.practicalcareproducts.com/downloads

Level-Dec Advance

Designed to make installation even easier



The location of joists within timber floors no longer presents a problem, as Level-Dec Advance includes a revolutionary drainage feature that allows the installer to rotate the drainage point through 360 degrees to any position in order to avoid the joist.

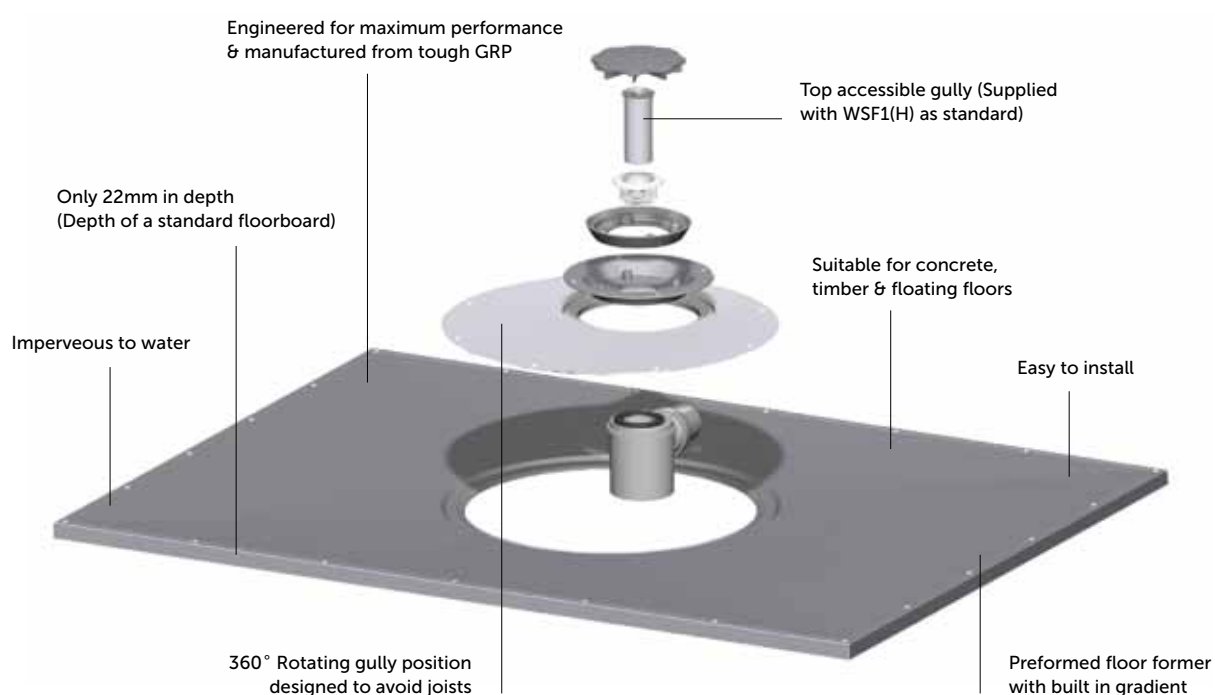


Remove floor boards, position Level-Dec Advance in required location and simply rotate gully position to avoid any joist and secure in place.

Level-Dec Advance Size Options

LEVEL-DEC ADVANCE 51

1200 x 900mm

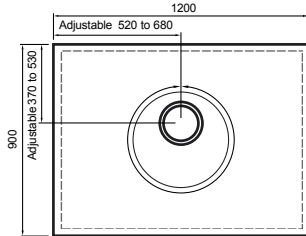


Order Reference Code
LDA 51
Overall Dimensions
1200 x 900mm
Maximum Shower Area
up to 1150 x 850mm

Trimable area
up to 30mm on perimeters
Handed
No

LEVEL-DEC ADVANCE 52

1500 X 1200mm

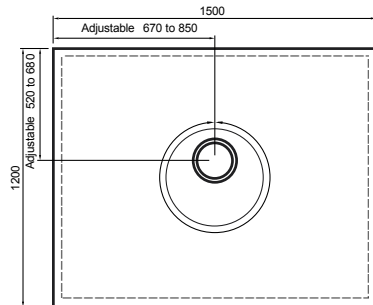


Order Reference Code
LDA 52
Overall Dimensions
1500 x 1200mm
Maximum Shower Area
up to 1450 x 1150mm

Trimable area
up to 30mm on perimeters
Handed
No

LEVEL-DEC ADVANCE 53

1650 X 750mm

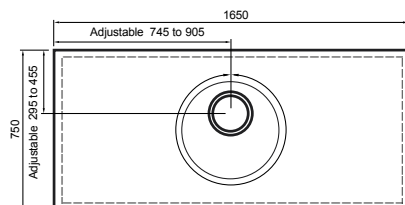


Order Reference Code
LDA 53
Overall Dimensions
1650 x 750mm
Maximum Shower Area
up to 1600 x 700mm

Trimable area
up to 30mm on perimeters
Handed
No

LEVEL-DEC ADVANCE 54

1050 X 1050mm



Order Reference Code
LDA 54
Overall Dimensions
1050 x 1050mm
Maximum Shower Area
up to 1000 x 1000mm


Trimable area
up to 30mm on perimeters
Handed
No



Installation instructions available on our website.
www.practicalcareproducts.com/downloads


Level-Grade

The Level-Grade sizes are made up of colour coded modular sections. Each section clicks together to form a matrix structure of various sizes and shapes. The Level-Grade is available in several pre packaged sizes. The packs are supplied boxed in kit form. Additional sections can be purchased individually.

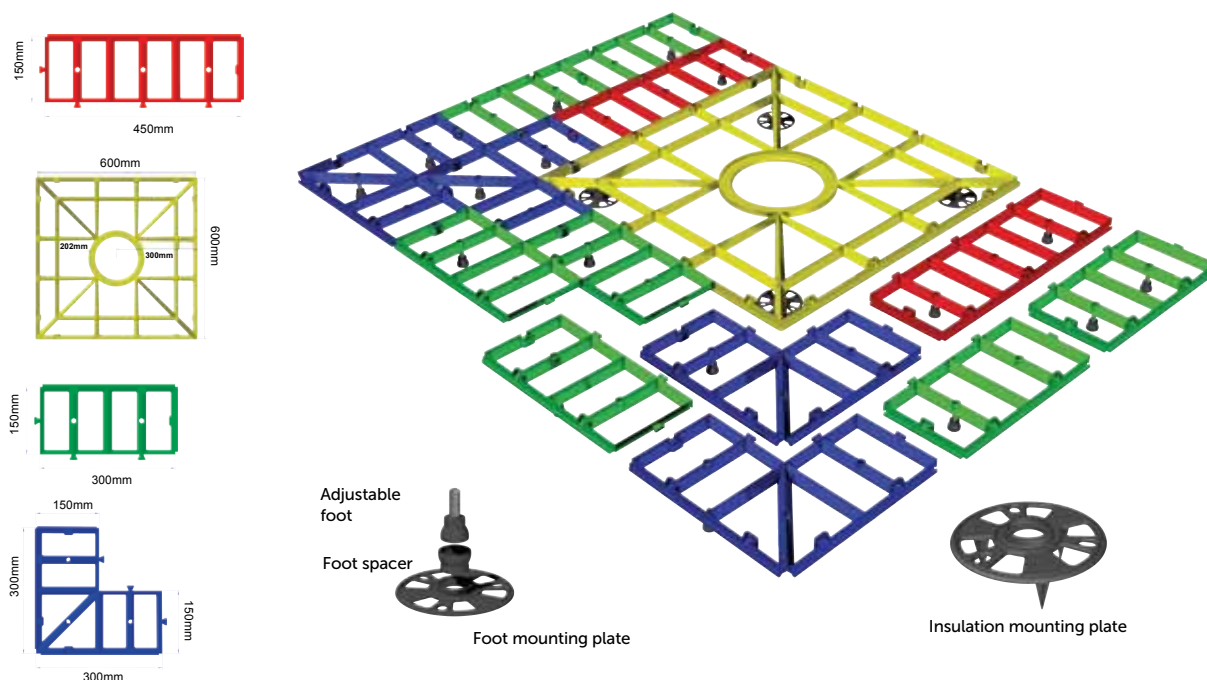

LEVEL-GRADE 1 KIT


900 x 900mm



600 x 600 mm square starter base	1
300 x 150 mm corner	4
300 mm straight infill	4
20 mm foot spacer	16
20 mm x M8 adjustable	16
Foot mounting plate	4

LEVEL-GRADE 2 KIT


1050 x 1050mm



600 x 600 mm square starter base	1
300 x 150 mm corner	3
450 mm straight infill	4
300 mm straight infill	6
20 mm foot spacer	31
20 mm x M8 adjustable	24
Foot mounting plate	4

LEVEL-GRADE 3 KIT


1200mm x 900mm



600 x 600 mm square starter base	1
300 x 150 mm corner	4
450 mm straight infill	2
300 mm straight infill	7
20 mm foot spacer	23
20 mm x M8 adjustable	23
Foot mounting plate	4

LEVEL-GRADE 4 KIT

1200 x 1200mm




600 x 600 mm square starter base	1
300 x 150 mm corner	8
300 mm straight infill	12
20 mm foot spacer	32
20 mm x M8 adjustable	32
Foot mounting plate foot	4

Level-Grade Size Options

LEVEL-GRADE 5 KIT


1350 x 1350mm



600 x 600 mm square starter base	1
300 x 150 mm corner	5
450 mm straight infill	6
300 mm straight infill	16
20 mm foot spacer	76
20 mm x M8 adjustable foot	42
Foot mounting plate	4

LEVEL-GRADE 6 KIT


1500 x 1050mm



600 x 600 mm square starter base	1
300 x 150 mm corner	6
450 mm straight infill	4
300 mm straight infill	12
20 mm foot spacer	47
20 mm x M8 adjustable foot	35
Foot mounting plate	4

LEVEL-GRADE 7 KIT


1500 x 1500mm



600 x 600 mm square starter base	1
300 x 150 mm corner	12
300 mm straight infill	24
20 mm foot spacer	72
20 mm x M8 adjustable foot	52
Foot mounting plate	4

LEVEL-GRADE 8 KIT

1800 x 1200mm

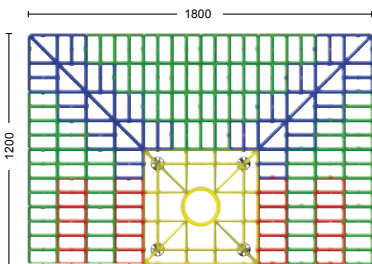

600 x 600 mm square starter base	1
300 x 150 mm corner	8
450 mm straight infill	4
300 mm straight infill	22
20 mm foot spacer	77
20 mm x M8 adjustable foot	50
Foot mounting plate	4



Installation instructions available on our website.
www.practicalcareproducts.com/downloads

Gravity Wastes

All of the gravity wastes shown here allow top access for easy cleaning and maintenance. The options available cover all possible types of gravity installation when fitting a shower tray, wet floor former or a screeded wet floor, both vinyl & tiled finish.

WSF1(H) for vinyl flooring Depth 128mm



The WFS1(H) with the horizontal outlet is the system that comes standard with the Level-Dec. It is used in conjunction with the Dalmer solos trap which when connected to the trap-a-dapta only measures a depth of 128mm. The other benefits being the 50mm water seal and the two part installation operation.

Also available for tiled floors:
WSF2(H) Depth 128mm

WSF1(V) for vinyl flooring Depth 215mm



The trap-a-dapta is also available with a vertical Dalmer solos bottom outlet trap that measures 215mm from top to bottom, which is often required on new build projects.

Also available for tiled floors:
WSF2(V) Depth 215mm

Pumped Waste TAD3 for vinyl flooring Depth 40mm



Also available for tiled floors:
TAD4 Depth 40mm

This waste is designed for use with Level-Decs and screeded wet floor showers where gravity drainage is a problem. It is compatible with most shower waste pumps and it has the added benefit of having a 22mm outlet as opposed to the standard 15mm. The new improved design allows more efficient drainage.

SLW1 for vinyl flooring Depth 100mm



Also available for tiled floors
SLW2

An extremely shallow trap with an overall depth of just 100 mm. This is a waterless trap with a one-way rubber membrane seal, specifically designed for use in areas where floor depth is minimal. Suitable for push-fit or solvent weld fitting, flow rate of up to 33L/min, 40mm outlet.

McAlpine TSG50WH Depth 90mm



This large horizontal wet floor gully can be fitted as an alternative to the WSF1(H). Its design means that it must be fitted to a Level-Dec before locating the Dec in the floor. It is also available as a vertical outlet version TSG2WH.

McAlpine TSG1SS Depth 130mm



This large horizontal wet floor gully has a stainless steel cover plate. It can be fitted as an alternative to the WSF1(H). Its design means that it must be fitted to a Level-Dec before locating the Dec in the floor.

Shower Waste Pumps



Many buildings, particularly modern ones, have solid floors. This makes it difficult to use a gravity waste on a level or low access shower. While we would always recommend that a pumped waste is the last choice option, it is sometimes unavoidable.

PUMP Whale flow switch tray gully kit



- Low maintenance, with no filters to clean
- Flow switch for automatic operation
- Will clear up to 14 Litres per minute from a shower

- Top & bottom suction compatible
- Shallow shower trap supplied as standard for use with Blackdown and Quantock trays
- Compatible with TAD 1, 2, 3 or 4 wet floor gully
- Low voltage variable speed transformer

PUMPMIRA Whale direct wired tray gulley kit



- Pump is wired directly into shower unit for instant operation
- No flow switch – easier & cheaper to fit

- Low maintenance, with no filters to clean
- Will clear up to 14 Litres per minute from a shower
- Shallow shower trap supplied as standard
- Top & bottom suction compatible
- Compatible with TAD 1, 2, 3 or 4 wet floor gully
- Low voltage variable speed transformer

PUMP INSTANT MATCH Whale direct wired self regulating kit



- Pump is wired directly into shower unit, no flow sensor, for instant operation, making it easier and cheaper to fit

- Multi speed low voltage transformer which varies the operating speed of the motor to avoid any sucking of air
- Low maintenance, with no filters to clean
- Will clear up to 14 Litres per min from a shower
- Shallow shower trap supplied as standard
- Top & bottom suction compatible
- Compatible with TAD1, 2, 3 or 4 wet floor gully

PUMP INSTANT MATCH SENSOR Whale flow sensor self regulating kit



- Low noise shower waste pump compatible with all standard electric showers
- Electronic flow sensor detects flow rate to shower unit, fitted to cold water feed pipe

- Multi speed low voltage transformer which varies the operating speed of the motor to avoid any sucking of air
- Low maintenance, with no filters to clean
- Will clear up to 14 Litres per min from a shower
- Shallow shower trap supplied as standard
- Top & bottom suction compatible
- Compatible with TAD1, 2, 3 or 4 wet floor gully

PUMPDIGITAL One Part Digital Waste Pump

Left hand illustrated



- Self regulating pump
- Digitally controlled circuit board
- Fine adjustment on overflow time (0-3 mins)
- Maximum drainage of 14ltrs/min (with 15mm inlet and 22mm outlet)
- IP55 rated plastic box
- Easy installation
- Right or left hand, i.e right hand pump has right hand inlet
- Conforms to EC EMC directive 93/68 EEC

PUMPDIGITAL SMOOTHFLOW Two Part Digital Waste Pump



- All the benefits of a standard Whale Automatic tray gully kit plus
- Almost silent when running
- Pump flow rate adjusts automatically to the shower flow rate
- Smart electronic pump controller maintains performance even when voltage supply varies

Blackdown Range



Quantock Range



Mendip Range



The Blackdown shower Tray is both versatile and durable. 35mm high and self supporting, it can be set virtually level access in the floor or ramped. There are 10 size options and it is compatible with our doors and pumps.

The Quantock shower tray is 35mm high and can be set in the floor or ramped. A handed tray with 15 size options makes it a popular and economic choice for many circumstances.

The Mendip shower tray, often referred to as the "above ground waste tray" is 90mm high and is ideal for situations where the floor cannot be breached and the waste cannot be pumped ie. block of flats. There are 7 size options available.

Blackdown Range

A versatile and durable shower tray



Key features

- Only 35mm high
- Can be set into floor for level access
- Self supporting
- Not-handed
- Separate tiling strip (included)
- Trap should avoid joists
- Solos trap 50mm water seal (included)
- Optional ramps
- Optional service ducting
- Waste pump compatible
- Suits standard & Rise Slider doors
- Suits carer screens



SOLOS DALLMER supplied with all trays




Has a 40mm outlet with a flexible ball joint to make connecting the waste easier. The trap also has a 50mm water seal making it compliant with building regulations. Top access for easy cleaning.

Cut-to-length to suit your space




Both the 1850x710 and 1850x830 can be cut to length to fit between two walls and finished off with a separate tiling return.

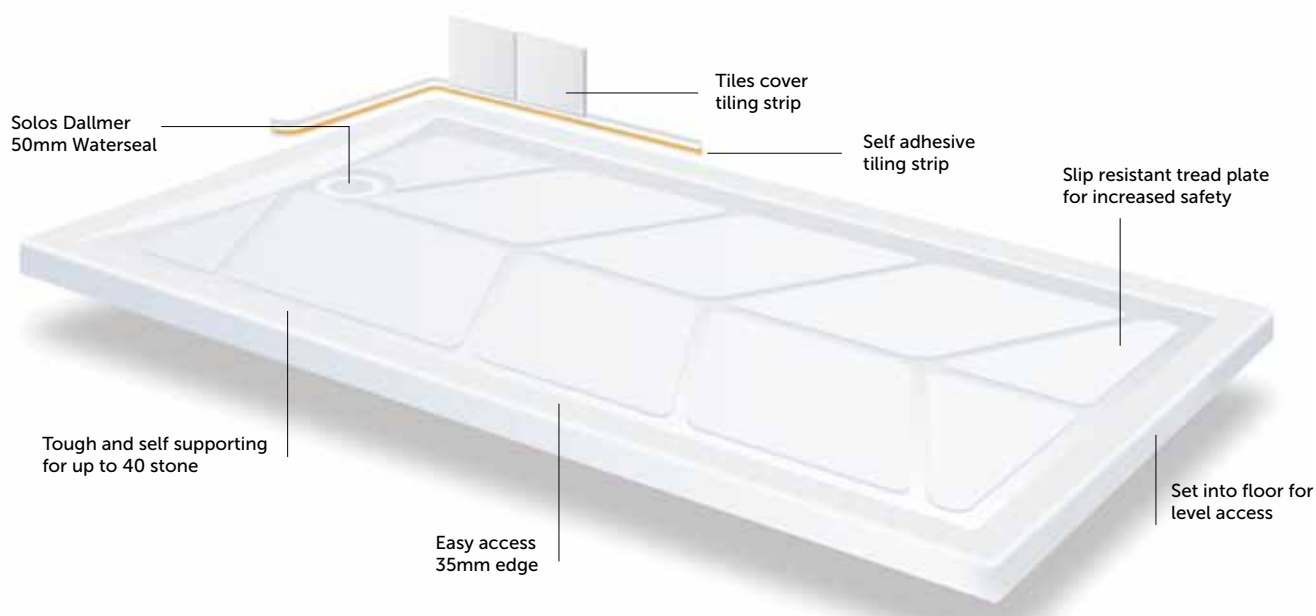


Blackdown Range Size Options


1100 x 710mm




1100 x 830mm




1250 x 710mm




1250 x 830mm

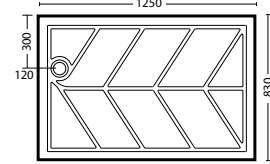


1500 x 710mm

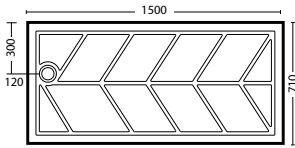


1500 x 830mm

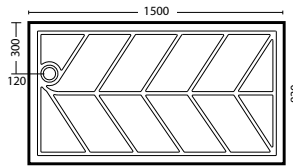


1000 x 1000mm




900mm x 900mm



1850 x 710mm

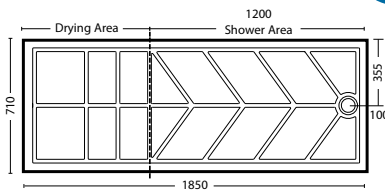


1850 x 830mm

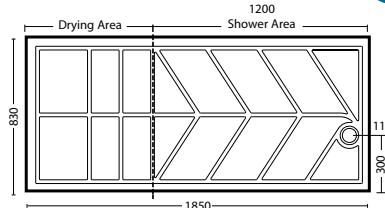

Ramp Kit

The Ramp Kit is used in conjunction with the Blackdown shower trays for wheeled chair access. The kit is modular and creates either a corner ramp or a straight ramp. The size of the ramp is determined by the size of the tray and is cut to size on site.

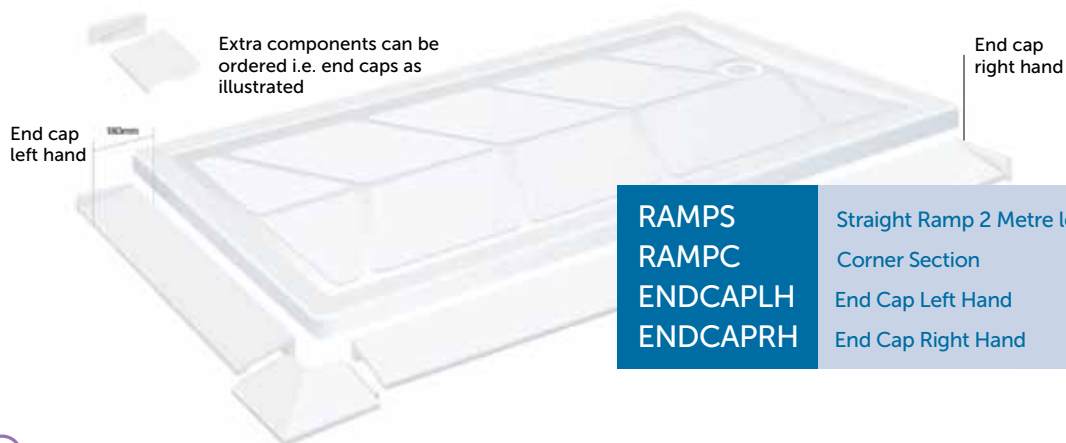

Installation instructions available on our website.
www.practicalcareproducts.com/downloads

Quantock Range

A popular and economical shower tray range



Key features

- Only 35mm high
- Textured surface
- Left or right hand
- Recessed for level access
- Top or bottom suction pump
- Attachable ramps
- Attachable service ducting
- Compatible with standard hinge & Rise Slider doors
- Compatible with cubicle enclosures
- Waste pump compatible
- McAlpine STW3/R trap



McAlpine STW3/R supplied with all trays




A compact trap of only 90mm with a 40mm (1.5") universal outlet and top access for easy cleaning.

Cut-to-length to suit your space




The 1700x710, 1700x750 and 1700x850 can be cut to length to fit between two walls and finished off with a separate tiling return.

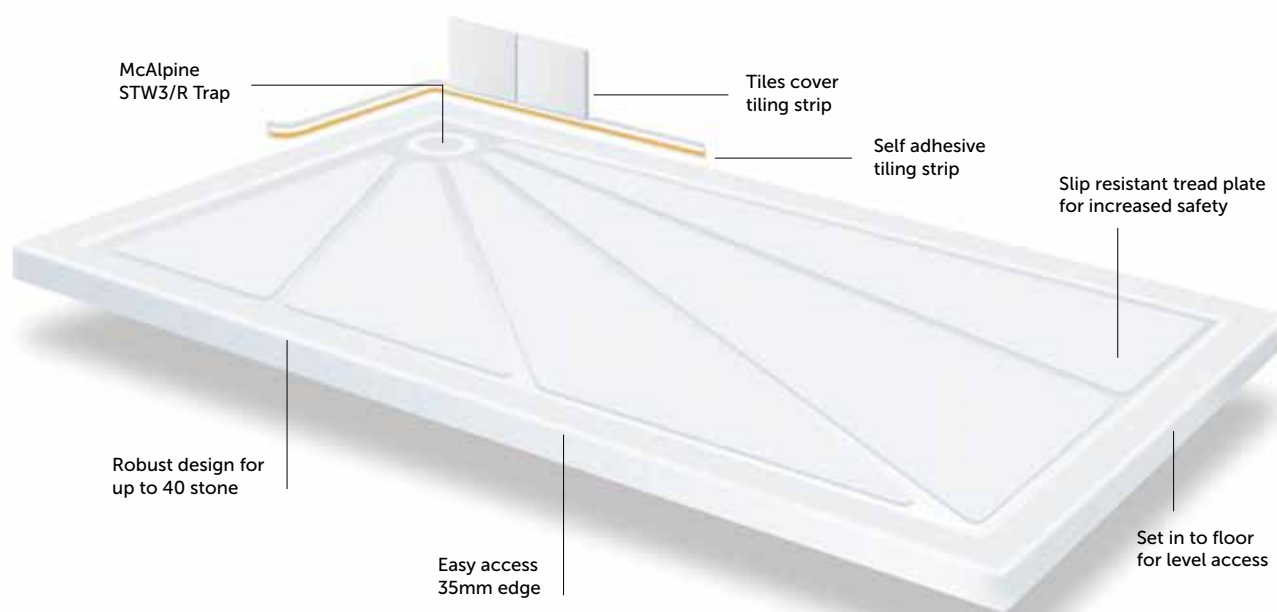


Quantock Range Size Options


760 x 760mm




800 x 800mm




900 x 900mm




1000 x 1000mm




1000 x 750mm




1200 x 700mm




1200 x 750mm




1200 x 800mm




1200 x 900mm




1300 x 650mm




1300 x 715mm




1600 x 710mm




1700 x 710mm



1700 x 750mm




1700 x 850mm



Ramp Kit

The Ramp Kit is used in conjunction with the Quantock shower trays for wheeled chair access. The kit is modular and creates either a corner ramp or a straight ramp. The size of the ramp is determined by the size of the tray and is cut to size on site.

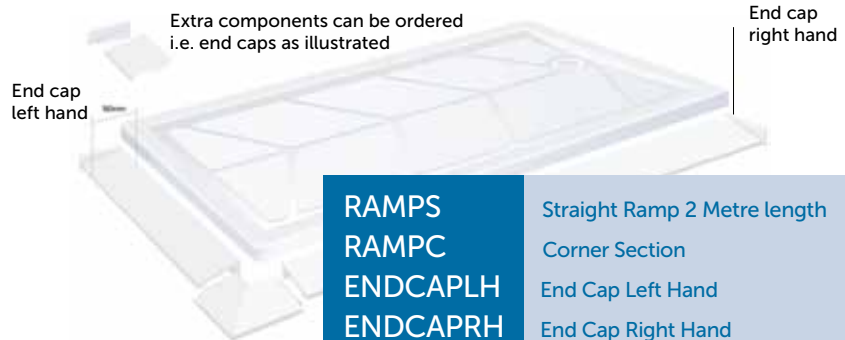

Installation instructions available on our website.
www.practicalcareproducts.com/downloads


Mendip Range

A shower tray for those unbreachable situations




Key features

- Ideal for situations in flats where the flooring cannot be breached
- Strong and self supporting
- Waste pumps not required
- Fitted concealed trap
- Multi-directional outlet
- 50mm water seal
- Inspection chamber to access trap
- 90mm high
- Separate tiling strip (included)
- Not handed
- Suits standard & Rise Slider doors
- Pipes concealed

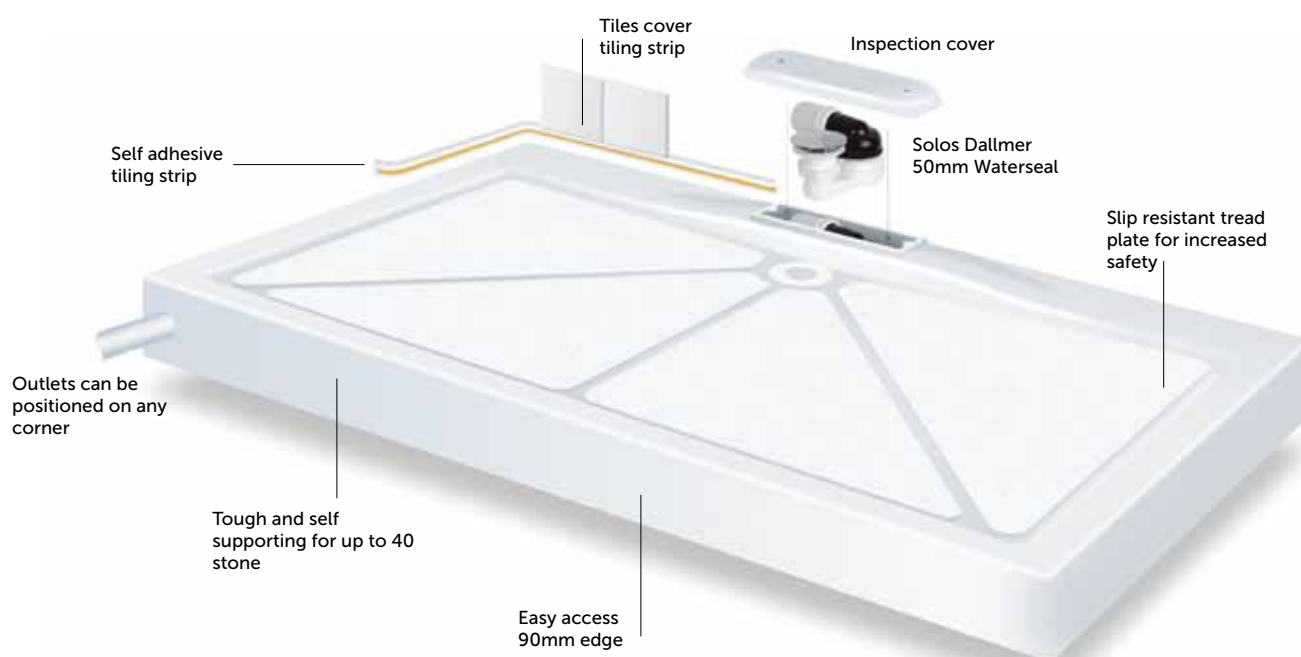


Mendip Range Size Options


900 x 900mm




1000 x 1000mm




1250 x 710mm




1250 x 830mm




1500 x 710mm



1500 x 830mm



1850 x 710mm

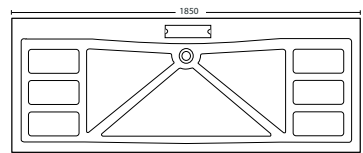


Optional accessories

RAMPSM

Mendip Shower Tray Ramp


The Mendip ramp is purchased as a separate item and is used when a wheel chair is required. The ramps overall width is 900mm and the overall depth is 400mm.

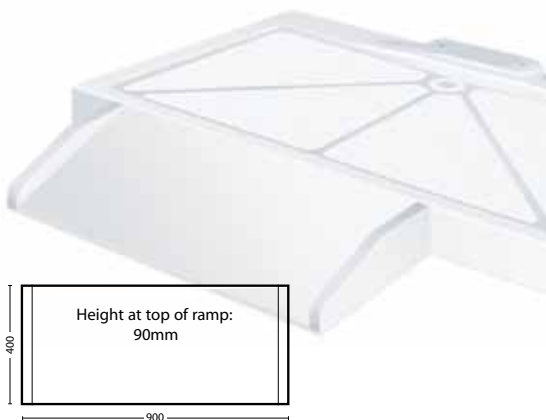

RAMPSTEPM

Mendip Shower Tray Half Step

The Mendip half step is a means of making it easier to step on the shower tray. The steps overall width is 720mm, the depth is 300mm and 50mm high.

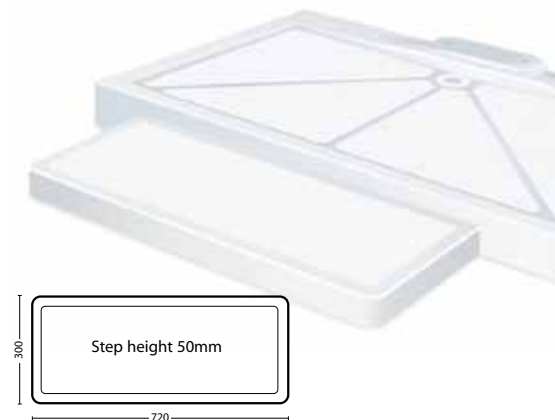

Installation instructions available on our website.
www.practicalcareproducts.com/downloads

Hinged Door Design



Rise Slider Door Design



Portable Folding Screens



Our half height hinged doors are available in a wide range of configurations to suit any showering need. Each set includes a curtain rail and weighted shower curtain. Our doors are manufactured here in the UK.

Our half height Rise Slider doors offer an alternative to the hinged version. There are 7 configurations to choose from which include a curtain rail and weighted shower curtain as standard. These doors are manufactured here in the UK.

When fixed screens are not appropriate, we offer a range of Portable Folding screens. Available in 4 sizes and manufactured here in the UK.

Standard Hinged Door Design



- 180° hinge, rise and fall with 10mm lift
- Wall compensator adjustment of upto 20mm
- High visibility handles available on request
- Tough, robust Polycarbonate panels
- All panels 750mm high for carer assistance

- Strong, rigid and lightweight powder coated aluminium frames
- Mini spirit level with every wall compensator to guarantee vertical accuracy
- L-shaped or straight curtain rails available as standard

OPTION C Left or Right handed



Fixed half height panel, 750mm wide, floor to ceiling pole, curtain rail and full length curtain.
Suitable for Corner or Alcove installation

Suits Blackdown, Quantock, Mendip, Level-Dec & Wet Floor showers

OPTION D Left or Right handed



Two fixed half height panels, one 400mm wide on long side, two floor to ceiling poles with one half height door hung from each, and one half height fixed panel on short side. L-shaped curtain rail and full length curtain.

Suitable for Corner installation

Suits Blackdown, Quantock, Mendip, Level-Dec & Wet Floor showers

OPTION E Left or Right handed



One fixed half height panel 400mm wide on long side, one floor to ceiling pole with two half height bi-fold doors, one hung from the floor to ceiling pole and one hung from the wall, meeting on corner. L-shaped curtain rail and full length curtain.

Suitable for Corner installation

Suits Blackdown, Quantock, Mendip, Level-Dec & Wet Floor showers

OPTION F Left or Right handed Not handed on square installations



Two fixed half height panels 400mm wide adjacent to each wall, two floor to ceiling poles with two half height doors, each hung from one floor to ceiling pole, meeting on corner. L-shaped curtain rail and full length curtain.

Suitable for Corner installation

Suits Blackdown, Quantock, Mendip, Level-Dec & Wet Floor showers

OPTION G Not handed



Two half height bi-folding doors between walls, meeting at the centre. Straight curtain rail and full length curtain.
Suitable for Alcove installation

Suits Blackdown, Quantock, Mendip, Level-Dec & Wet Floor showers

OPTION H Left or Right handed Not handed on square installations




Two half height bi-folding doors meeting on corner. L-shaped curtain rail and full length curtain.

Suitable for Corner installation

Suits Blackdown, Quantock, Mendip, Level-Dec & Wet Floor showers

OPTION J Left or Right handed

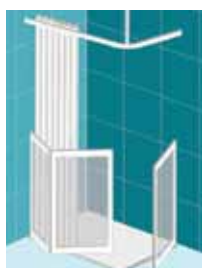

One half height bi-folding door on long side and one single door on short side, meeting on corner. L-shaped curtain rail and full length curtain.
Suitable for Corner installation

Suits Blackdown, Quantock, Mendip, Level-Dec & Wet Floor showers

OPTION K Not handed



Two single half height bi-parting doors between walls, meeting at the centre. Straight curtain rail and full length curtain.
Suitable for Alcove installation

Suits Blackdown, Quantock, Mendip, Level-Dec & Wet Floor showers

Left hand version illustrated unless otherwise specified. Please note: U-rails are optional on all units and need to be specified on order.

Standard Hinged Door Design

OPTION M Left or Right handed



One half height fixed panel 400mm wide, one floor to ceiling pole, with one bi-folding door hinged from wall meeting at floor to ceiling pole at the centre. Straight curtain rail and full length curtain.

[Suitable for Alcove installation](#)

Suits Blackdown, Quantock, Mendip, Level-Dec & Wet Floor showers

OPTION N Left or Right handed




One fixed half height panel 400mm wide on long side, one floor to ceiling pole with half height tri-fold doors hung from the wall, meeting at floor to ceiling pole on long side. L-shaped curtain rail and full length curtain.

[Suitable for Corner installation](#)

Suits Blackdown, Quantock, Mendip, Level-Dec & Wet Floor showers

OPTION P Left or Right handed Not handed on square installations

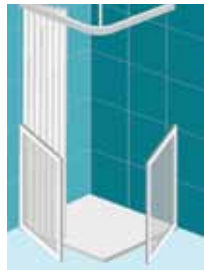

Two single half height bi-parting doors meeting on the corner. L-shaped curtain rail and full length curtain.

[Suitable for Corner installation](#)

Suits Blackdown, Quantock, Mendip, Level-Dec & Wet Floor showers

OPTION R Left or Right handed



One fixed half height panel 400mm wide on long side, one floor to ceiling pole with half height bi-fold doors hung from the wall, meeting at floor to ceiling pole on long side. L-shaped curtain rail and full length curtain.

[Suitable for Corner installation](#)

Suits Blackdown, Quantock, Mendip, Level-Dec & Wet Floor showers

OPTION S Left or Right handed



One half height bi-folding door hinged at one end between walls. Straight curtain rail and full length curtain.

[Suitable for Alcove installation](#)

Suits Blackdown, Quantock, Mendip, Level-Dec & Wet Floor showers

OPTION T Left or Right handed



One half height bi-folding door hinged at one end and one single half height door hinged at opposite end between walls. Straight curtain rail and full length curtain.

[Suitable for Alcove installation](#)

Suits Blackdown, Quantock, Mendip, Level-Dec & Wet Floor showers

OPTION V Left or Right handed



One half height tri-folding door hinged off wall on long side and one bi-folding half height door hinged off other wall meeting on corner. L-shaped curtain rail and full length curtain.

[Suitable for Corner installation](#)

Suits Blackdown, Quantock, Mendip, Level-Dec & Wet Floor showers

OPTION W Left or Right handed



One half height tri-folding door hinged at one end between walls. Straight curtain rail and full length curtain.

[Suitable for Alcove installation](#)

Suits Blackdown, Quantock, Mendip, Level-Dec & Wet Floor showers

OPTION X Left or Right handed




One half height fixed panel on short side, floor to ceiling pole on corner, with two single half height doors on long side meeting in the centre. L-shaped curtain rail and full length curtain.

[Suitable for Corner installation](#)

Suits Blackdown, Quantock, Mendip, Level-Dec & Wet Floor showers

DOOR HANDING CONFIGURATION

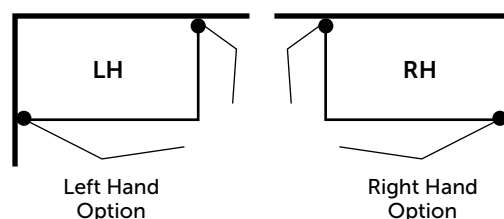

Rise Slider Door



- Sliding door design with 180° hinge at compensator, rise & fall with 10mm lift
- Wall compensator with up to 20 mm adjustment
- Mini spirit level with every wall compensator to guarantee vertical accuracy
- L-shaped or straight curtain rails available as standard

- High visibility handles available on request
- Tough, robust Polycarbonate panels
- Strong, rigid & lightweight powder coated aluminium frames
- All panels 750mm high for carer assistance

Left hand version illustrated unless otherwise specified

OPTION 1

Left or Right handed
Not handed on square installations



Two half height sliding doors hinged at walls, meeting on corner. L-shaped curtain rail and full length curtain.
[Suitable for Corner installation](#)

Suits Blackdown, Quantock (made to order), Mendip, Level-Dec & Wet Floor showers

OPTION 2

Left or Right handed



One set of sliding doors hinged on one wall, latch on opposite wall, between walls. Straight curtain rail and full length curtain. Maximum 1500mm width.
[Suitable for Alcove installation](#)

Suits Blackdown, Quantock, Mendip, Level-Dec & Wet Floor showers

OPTION 3

Left or Right handed



One half height fixed panel 400 mm wide, one floor to ceiling pole, with one set of sliding doors hinged from wall meeting floor to ceiling pole at the centre. Straight curtain rail and full length curtain.
[Suitable for Alcove installation](#)

Suits Blackdown, Quantock, Mendip, Level-Dec & Wet Floor showers

OPTION 4

Not handed



Two half height sliding doors hinged at walls, meeting at centre. Straight curtain rail and full length curtain.
[Suitable for Alcove installation](#)

Suits Blackdown, Quantock, Mendip, Level-Dec & Wet Floor showers

OPTION 5

Left or Right handed



One half height fixed panel 400 mm wide, one floor to ceiling pole, with one set of sliding doors hinged from floor to ceiling pole latching at opposite wall. Straight curtain rail and full length curtain.
[Suitable for Alcove installation](#)

Suits Blackdown, Quantock, Mendip, Level-Dec & Wet Floor showers

OPTION 6

Left or Right handed



One half height fixed panel 400 mm wide, one floor to ceiling pole, with one set of sliding doors hinged from floor to ceiling pole and one set of sliding doors hinged from wall, meeting on corner. L-shaped curtain rail and full length curtain.
[Suitable for Corner installation](#)

Suits Blackdown, Quantock (made to order), Mendip, Level-Dec & Wet Floor showers

OPTION 7

Left or Right handed



One half height fixed panel 400 mm wide on long side, two floor to ceiling poles, with one set of sliding doors hinged from floor to ceiling pole and one half height fixed panel on short side between wall and second floor to ceiling pole. L-shaped curtain rail and full length curtain.
[Suitable for Corner installation](#)

Suits Blackdown, Quantock (made to order), Mendip, Level-Dec & Wet Floor showers

Air Assisted doors available on options 1 to 7

Please note: U-shaped curtain rails are optional on all units & can be specified when ordering.

Special sizes & configurations can be made to order at a small extra charge.

Rise Slider Door Designs are available on Quantock range of shower trays as "made to order" items only unless size is manufactured to suit a Blackdown or Level-Dec tray size.

Portable Folding Screens & Service Ducting



PORTABLE FOLDING SCREENS


Lightweight and very strong with tough frames and robust Polycarbonate panels. For use on trays and wet floors. Supplied with handles.

Product Ref	Dimensions
PFS1	750h x 650 x 650
PFS2	750h x 750 x 750
PFS3	750h x 1000 x 1000
PFS4	750h x 400 x 225 x 225 x 400

PFS1, PFS2, PFS3



PFS4

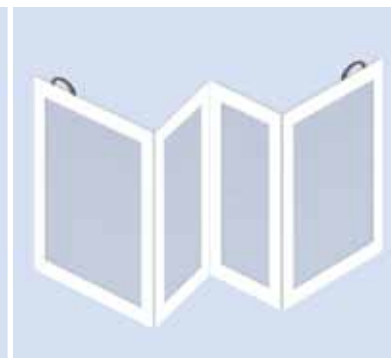

INFILL POSTS & SERVICE DUCTING

Service Ducting

Used to hide pipework, sink wastes etc behind panels constructed of heavy duty GRP instead of chasing out floors and walls. The ducting is available in two lengths for use with the Blackdown & Quantock shower tray ranges:

These lengths can be cut to size on site. The top edge is a tiling lip and the bottom flange is screwed down with self tapping screws and then siliconed to the tray.


Infil Posts

Used in conjunction with screen sets & Service Ducting, the infil post is located on top of the Service Ducting and fills the space created by the ducting above the height of the ducting itself.

INFPOST

SDUCT1500
SDUCT2400

1.5 Metres long
2.4 Metres long

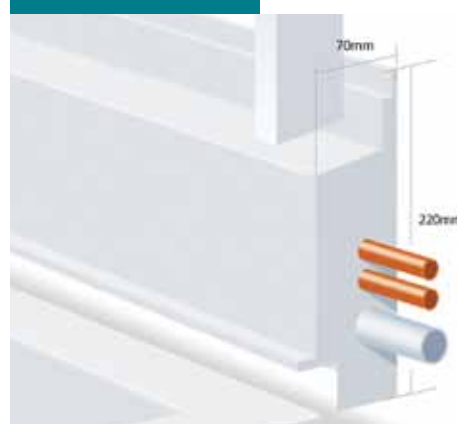

FULL HEIGHT PANELS & DOORS

We are pleased to offer full height screens and doors (nominally 1800 mm high) made to the same high standards and designs as our half height doors. These can be mounted onto any of our shower trays or onto a wet floor shower area.

We are always happy to offer a design service to incorporate any size and shape of panel or door into a shower installation. We will take account of any design limitations and can normally supply our made to order screens within 2 -3 working days of an order.



Installation instructions available on our website.
www.practicalcareproducts.com/downloads

Glass Screens



Having specialist needs should not mean compromising on style. We offer a beautifully designed and stylish range of full height and half height glass screens to suit all needs.

HALF HEIGHT SCREENS

These half height enclosures are designed to ensure a safe and stylish showering experience with the provision for carer assistance if needed.



Size Options

1200 x 900 mm

1300 x 800 mm

900 x 900 mm

1200 x 1200 mm

Features

- Stylish polished aluminium design
- 750 mm high
- Toughened stay clean glass
- Easy grip handle
- Rise & fall wall hinge allows easy access to shower area
- 360° middle hinge allowing maximum entry space



Glass Screens



FULL HEIGHT SCREENS

These full height screens are stylish and minimalist in design, allowing easy access to the showering area, whilst the integrated floor to ceiling pole provides extra assistance when needed.

Features

- High quality 8 mm toughened glass
- Screen 2000 mm high
- 2600 mm integrated support pole
- Floor to ceiling fixing for safety and peace of mind
- Suitable for tiled floor, vinyl floor or shower tray

Size Options

760 mm

900 mm

1200 mm



Drainage Options

DSS1/H Tiled Floor Gully Horizontal Outlet, Depth 128mm



Height adjustable stainless steel top with 50mm water seal. Suitable for floor tiles between 6mm and 26mm in depth. Vertical gully options available on request.

DSS2 Tiled Floor Gully for Pumped Waste, Depth 38mm



Height adjustable stainless steel top. Suitable for floor tiles between 6mm and 26mm in depth. Allows water to be pumped away when used in conjunction with the Dry-Deck waste pump.

UGC1/H Vinyl Floor Gully Horizontal Outlet, Depth 128mm



The UGC1/H is designed for vinyl floor coverings and features a stylish chrome-effect clamping ring and cover plate. It has an adjustable horizontal outlet, a depth of 128mm and a 50mm water seal.

UGC1/V Vinyl Floor Gully with Vertical Outlet, Depth 216mm



Designed for vinyl floor coverings, the UGC1/V features a stylish chrome-effect clamping ring and cover plate. It has a vertical waste outlet, a depth of 216mm and a 50mm water seal.

UGP1 Vinyl Floor Gully for Pumped Drainage, Depth 38mm



This shallow waste gully has been developed for use in locations where gravity drainage is not an option. The overall depth of the UGP1 is just 38mm and it comes with a chrome effect clamping ring and cover plate.

Dry Deck 20 Shower Waste Pump



- The flow rate of the Dry-Dec 20 system automatically adjusts to changes in shower flow rate
- Almost silent when running
- No filters in waste system - no cleaning required
- Valves integral to the pump prevent odours escaping from the drainage pipe
- Maximum flow rate 20 ltr/min
- 3 year warranty

Wetroom Floor – Waterproofing

When you need to waterproof a shower or wetroom area quickly and safely we have the answer. The Tilesafe® membrane is a cold-applied, self-adhesive, waterproof membrane which consists of a thick rubberised waterproof layer, incorporating a woven glass fibre mesh on one side.

Benefits


- Quick and easy to apply
- Simple to detail in critical areas
- Ideal for suspended timber floors
- Allows for movement in substrates
- Compatible with all quality adhesives
- Cost effective solution

TS1 10m² kit

- 10m² of Tilesafe® membrane
- Tilesafe® primer
- Reinforcing tape
- Jointing compound
- Putty

TS2 5m² kit

- 5m² of Tilesafe® membrane
- Tilesafe® primer
- Reinforcing tape
- Jointing compound
- Putty

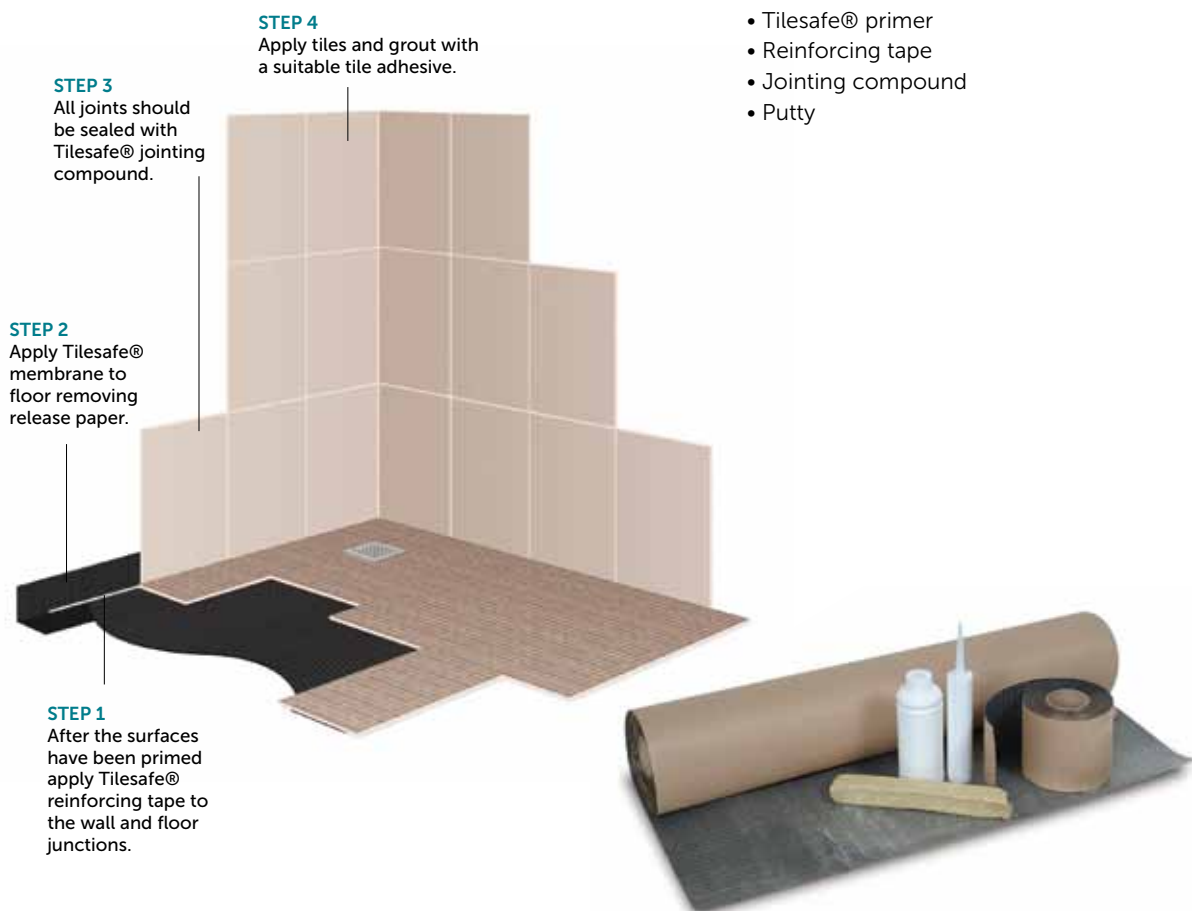

Impress Cubicle



Snowdon Cubicle



Snowdon Shower Toilet Cubicle



Where a full bathroom adaptation is not appropriate the Impress Shower Cubicle offers an easy solution. The 2 sided enclosure allows maximum entry into the shower area, yet is fully enclosed when the doors and full length curtain are used.

The Snowdon Shower Cubicle is a 3 sided enclosure designed to fit into enclosed spaces which may not allow side entry.

When major adaptation work to an existing bathroom is not possible the Snowdon Shower Toilet Cubicle offers a cost effective solution. Perfect for temporary or ground floor applications, this offers an entire bathroom package allowing those with limited mobility independence at home.

Impress Cubicle



Our cubicles have been designed with maximum access in mind, so we have created a cubicle that is open on two sides, yet the shower area can be fully enclosed using the doors & full length shower curtain provided.

They are suitable for wheelchair access or for those who have limited mobility. Although the cubicle only has two fixed sides it is still very sturdy and because the wall panels are solid it is also very robust. The cubicles come with either Option H or J doors depending on your needs.

What's included

- Blackdown or Mendip shower tray
- Solos shower waste trap
- Two TRESPA panels
- Half height shower doors
- Corner curtain rail
- CIBA anti-bacterial curtain
- Grab rail

Optional extras

- Glazed roof panel
- Extractor fan/light
- Access ramp see page 31



Electric shower not included





Installation instructions available on our website.
www.practicalcareproducts.com/downloads

Impress Cubicle

BLACKDOWN TRAY OPTIONS



1000 x 1000mm

1250 x 710mm




1250 x 830mm

1500 x 710mm





1500 x 830mm



MENDIP TRAY OPTIONS



1000 x 1000mm

1250 x 710mm




1250 x 830mm


1500 x 710mm



1500 x 830mm




OPTION H

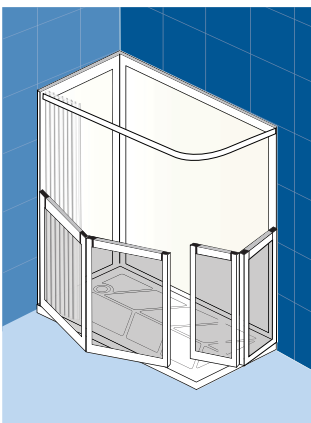

Two half height bi-folds meeting on the corner, L-shaped curtain rail and curtain.

Left hand doors illustrated

OPTION J

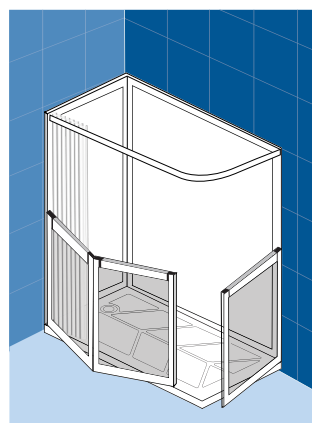

One bi-fold and single door meeting on the corner, L-shaped curtain rail and curtain.

Left hand doors illustrated

Snowdon Cubicle



SHOWER CUBICLES

The Snowdon cubicles have been designed to fit into enclosed spaces which may not be suitable for side opening doors as found in the Impress range. For this reason the cubicles have fixed panels on 3 sides and the doors open to the front.

Again, solid panels and a tough construction ensure that the cubicle is robust and will give trouble free service. The cubicles come with Option K doors and a full length shower curtain.

Note: The Snowdon cubicles are also available with the option of a half glazed side panel, which allows more light into the shower area.

What's included

- Blackdown or Mendip shower tray
- Shower waste trap
- Three TRESPA panels
- Half height shower doors
- CIBA anti-bacterial curtain
- Grab rail

Optional extras

- Glazed roof panel
- Extractor fan/light
- Access ramp see pages 31 and 35



Electric shower not included





Installation instructions available on our website.
www.practicalcareproducts.com/downloads

Snowdon Cubicle

BLACKDOWN TRAY OPTIONS



1000 x 1000mm

1250 x 710mm




1250 x 830mm

1500 x 710mm





1500 x 830mm



MENDIP TRAY OPTIONS



1000 x 1000mm

1250 x 710mm




1250 x 830mm


1500 x 710mm



1500 x 830mm



OPTION K

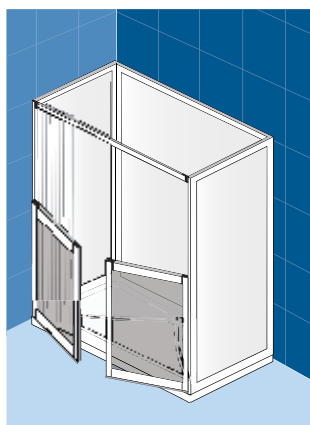

Bi-parting doors meeting in centre, with straight curtain rail and curtain.

Snowdon Shower Toilet Cubicle

A versatile and durable shower tray range



A complete solution for those who are limited for space, the Snowdon Shower Toilet cubicles offer an entire bathroom package in an area as small as 1550mm x 710mm!

The cubicles include a wall hung WC, wash hand basin and grab support rail for all your bathroom needs, and when combined with a shower unit the cubicle becomes a complete bathroom that can be installed anywhere in the home. It is perfect for those who have limited mobility but want to remain living in their own homes without the fuss or cost of expensive permanent adaptations.

What's included

- Blackdown shower tray
- Three TRESPA panels
- Option K doors
- Wall hung WC and supporting framework
- Concealed cistern
- Wash hand basin and lever taps
- Inspection panel to access cistern (350mm wide)
- CIBA anti-bacterial curtain
- Grab rail
- Height excluding tray 1850mm

Optional extras

- Glazed roof panel
- Extractor fan/light
- Access ramp see pages 31




Electric shower not included




Snowdon Shower Toilet Cubicle

BLACKDOWN TRAY OPTIONS


1000 x 1000mm




1250 x 710mm




1250 x 830mm




1500 x 710mm

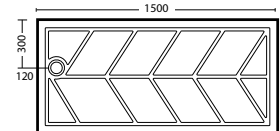


In order to securely fix a WC to the wall of the cubicle it is necessary to have a toilet support frame and cistern mounted on the outside of the cubicle that adds approximately 350mm to the overall length of the cubicle. The frame and cistern are enclosed with an inspection panel to maintain a less intrusive look.

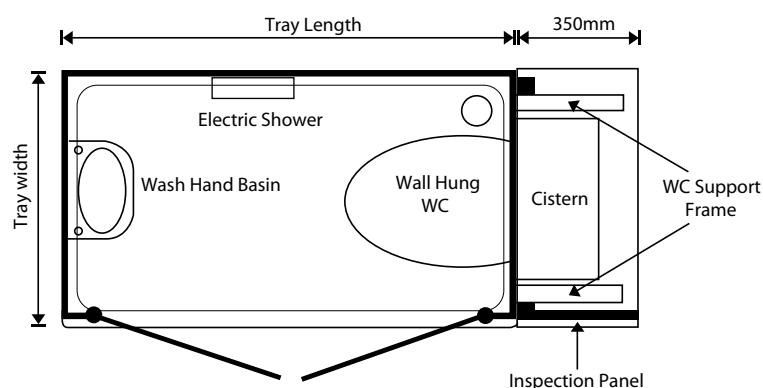

1500 x 830mm

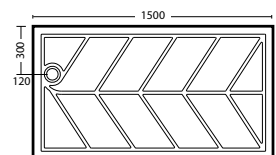

OPTION K

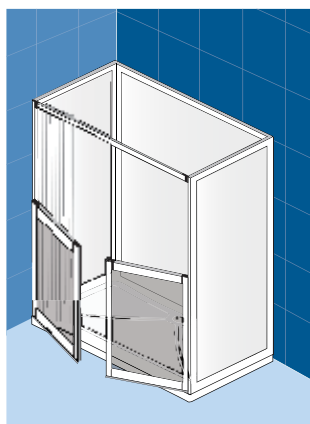

Bi-parting doors meeting in centre, with straight curtain rail and curtain.



Installation instructions available on our website.
www.practicalcareproducts.com/downloads

Shower Units

A versatile and durable shower tray range

Mira Advance ATL Flex 9kW



Thermostatic Electric Shower with flex lever, standard control & flex fittings.

- Controlled shutdown flushes water from the shower to minimise any unexpected temperature change if quickly re-started
- Safe showering with precise thermostatic control maintains water temperature to within $\pm 1^{\circ}\text{C}$
- Large colour contrasting lever for easy grip & operation
- Raised push button controls for ease of use
- ATL - Adjustable temperature Limit for added safety
- Smooth glide bar with easy glide operation, wall or corner mounted
- Second fixed handset holder for extra convenience
- 2 year guarantee

Mira Advance ATL Flex Extra 9kW



Thermostatic Electric Shower with flex lever, standard control & flex fittings.

- Manufactured to work with Whale waste water pump without the need to fit a flow switch. Automatic pump operation maintained by direct wire feed from pump transformer directly into shower unit.
- Controlled shutdown flushes water from the shower to minimise any unexpected temperature change if quickly re-started
- Safe showering with precise thermostatic control maintains water temperature to within $\pm 1^{\circ}\text{C}$
- Large colour contrasting lever for easy grip & operation
- Raised push button controls for ease of use
- ATL - Adjustable temperature Limit for added safety
- Smooth glide bar with easy glide operation, wall or corner mounted
- Second fixed handset holder for extra convenience
- 2 year guarantee

Shower Units

Triton Safeguard Care 8.5kW



Thermostatic electric shower with extended riser rail & 2 metre hose.

- Phased shutdown flushes water from the shower to minimise any unexpected temperature change if quickly re-started
- Safe showering with thermostatic control
- Large colour contrasting lever for easy grip & operation
- Large colour contrasting push button Start/Stop for ease of use
- Adjustable maximum temperature limit set between 38°C & 47°C for added safety
- "Power On" indicator
- "Low pressure" indicator operates when operating water pressure is too low
- Audible feature alert when shower is started and stopped
- Second fixed handset holder for extra convenience
- 2 Year Guarantee

Triton Safeguard Care Pumped 8.5kW



Where water pressure is low or unreliable, choose the tank-fed Safeguard Pumped Care for installation on a cold water cistern gravity system

Triton Safeguard Care Digilink 8.5kW



Connects to proprietary digital level access waste pump such as "Whale Instant Match" without the need to fit a flow switch. Automated pump operation maintained by direct wire feed from pump transformer directly into the shower unit.

Shower Units

A versatile and durable shower tray range

Redring Selectronic Premier Plus 8.5 kW



Thermostatic electric shower with extended riser rail and hose

- Thermostatic temperature control for safe showering
- 1 metre chrome riser rail with adjustable handset holder and soap dish
- 2 metre chrome shower hose
- "Lock Mode" with three optional settings ensures water temperature remains within safe range
- Audible feedback response to Push-Button operation
- Large one touch, easy to press button operation
- Large LED temperature readout display
- Phased shutdown - reducing scale and ensuring cool-start for next user
- Automatic shutdown after 30 minutes of inactivity
- RNIB endorsed
- 3 year guarantee



Redring Selectronic Premier Plus Remote

Offers all the features of the Selectronic Premier Plus, but with the following additions;



- A wireless remote on/off control
- Battery operated to within 10 metres
- Retro fixable to an existing Selectronic Premier unit in the future

Mira Coda Plus

Thermostatic mixer shower with riser rail and fixings

- Exposed valve with bar valve fixing kit
- Thermostatic temperature control for safe showering
- Maximum temperature stop for added safety – option to override this if hotter shower preferred
- Separate temperature and flow controls
- Three spray showerhead with rub-clean rubber nozzle for easy cleaning
- Clean chrome finish
- 5 year guarantee



Mira Miniduo (EV & BIV)

Thermostatic mixer shower with riser rail and fixings

- Available as an exposed (EV) or built in (BIV) valve with adjustable fittings
- Mini size, maximum performance
- Thermostatic temperature control for safe showering
- Separate temperature and flow controls
- Can be fitted to falling, rising or rear water supply
- Four spray showerhead with partial rub-clean rubber nozzle for easy cleaning
- Clean chrome finish
- TMV2 approved
- 3 year guarantee



BIV

Shower Units

Mira Select Flex

Thermostatic mixer shower with extended hose, riser rail and fixings

- Exposed valve with adjustable fittings
- Thermostatic temperature control for safe showering
- Separate temperature and flow controls
- 'Cool touch' technology prevents valve becoming hot whilst in use
- Maximum temperature stop for added safety
- Smooth glide bar with easy glide operation, wall or corner mounted
- 2m hose and 1m slide bar for added flexibility
- Extra separate showerhead holder for more convenience
- Clean chrome finish
- TMV2 and TMV3 approved
- 5 year guarantee



Mira Excel (EV & BIV)

Thermostatic mixer shower with riser rail and fixings


- Available as an exposed (EV) or built in (BIV) valve with adjustable fittings
- Thermostatic temperature control for safe showering
- Maximum temperature stop for added safety – option to override this if hotter shower preferred
- Separate temperature and flow controls
- Ceramic flow control keeps lime scale at bay
- Excellent performance on any water system, even low pressure
- Four spray showerhead with rub-clean rubber nozzle for easy cleaning
- Clean chrome finish
- 5 year guarantee



Triton Elina TMV3 Concentric (EV & BIV)

Thermostatic mixer shower

- Available as an exposed (EV) or built in (BIV) valve
- Thermostatic temperature control for safe showering
- Factory set maximum temperature at 38°C
- Separate flow and temperature controls
- Tamper proof lever controls
- Automatic shutdown if hot or cold water supplies fail
- Flow limiters supplied
- Clean chrome finish
- TMV3 approved
- 3 year guarantee

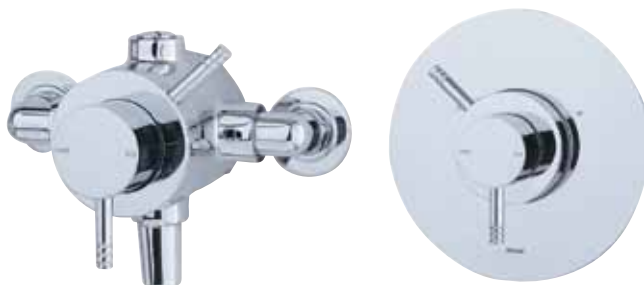


Mira Special Needs Fittings Kit

- Suitable for any shower
- 1.5m slide bar
- Rubberised push button clamp bracket allows easy height adjustment even when wet
- Gel hook/hose tidy
- 2m reinforced chrome/plastic hose
- Includes wall fixings
- White/chrome



Triton Extended Care Fittings Kit

- Suitable for any shower
- 940 mm riser rail
- Clamp bracket allows easy height adjustment
- Includes 7000 series showerhead
- 2m reinforced hose, chrome
- Includes wall fixings
- Hose tidy and soap dish
- Chrome/grey or chrome/white

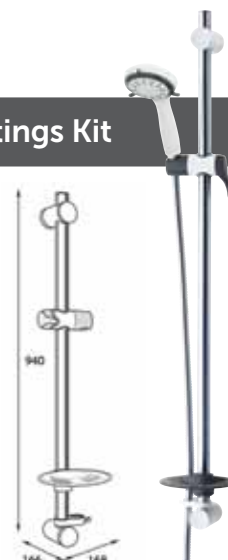

Shower Curtains

A versatile and durable shower tray range

All our shower curtains are specifically manufactured to suit a level or easy access shower when the user may have particular needs.

- Textile material which is breathable thereby reducing any potential suffocation risk.
- Material is treated with an anti-bacterial agent during manufacture.
- Machine washable if necessary.
- Weighted hem to help water retention and reduce curtain suction.
- Standard colour is white.



SHOWER CURTAIN STANDARD SIZES

Product Ref	Dimensions
SC1200 X 1200	1200 Drop x 1200 Wide
SC1250 X 1800	1250 Drop x 1800 Wide
SC1800 X 1800	1800 Drop x 1800 Wide
SC1800 X 2000	1800 Drop x 2000 Wide
SC1800 X 2200	1800 Drop x 2200 Wide
SC1800 X 2400	1800 Drop x 2400 Wide
SC2000 X 1800	2000 Drop x 1800 Wide
SC2000 X 2000	2000 Drop x 2000 Wide
SC2000 X 2200	2000 Drop x 2200 Wide
SC2000 X 2400	2000 Drop x 2400 Wide
SC2200 X 2200	2200 Drop x 2200 Wide
SC2400 X 1800	2400 Drop x 1800 Wide



CAPTIVE CURTAIN SYSTEM

If you want to secure your curtain to the wall while the shower is being used, we suggest that you try our Captive Curtain System. The curtain is held in place by a wall mounted roller mechanism. It is particularly useful stopping splashing around the side of the curtain during showering if there is curtain suction.

SCCAPTIVE

Curtain Rails

All shower curtain rails are manufactured in Aluminium which is then powder coated white. The Aluminium is extruded to a heavy duty design which will resist accidental bending. All rails are supplied with a standard fixing pack (wall brackets & fixings, curtain glides and a track gasket).

STRAIGHT RAILS

CR1300	1300 mm long
CR2000	2000 mm long
CR2500	2500 mm long



L-SHAPED (All supplied with 1 ceiling rod & fixing bracket)



CR900x900	900 x 900 mm
CR1200x1200	1200 x 1200 mm
CR1300x900	1300 x 900 mm
CR1500x900	1500 x 900 mm
CR1500x1200	1500 x 1200 mm
CR1800x900	1800 x 900 mm

U-SHAPED (All supplied with 2 ceiling rods & fixing brackets)

CRU810 x 740 x 810	810 x 740 x 810 mm
CRU860 x 860 x 860	860 x 860 x 860 mm
CRU950 x 950 x 950	950 x 950 x 950 mm
CRU1000 x 1000 x 1000	1000 x 1000 x 1000 mm
CRU1150 x 1150 x 1150	1150 x 1150 x 1150 mm
CRU800 x 1600 x 800	800 x 1600 x 800 mm
CRU900 x 1230 x 900	900 x 1230 x 900 mm
CRU900 x 1330 x 900	900 x 1330 x 900 mm
CRU1200 x 1450 x 1200	1200 x 1450 x 1200 mm



Special sized curtain rails can be made to order if required. Normally made to order in around 2 - 3 working days.

EXTENDED CEILING ROD

Curtain rail ceiling support rod, 1200 mm

CRSR1200

WINDOW SPANNING KIT

Span a window inside shower area up to 1200 mm wide

CRWSK

These kits are used in conjunction with a Straight or L-shaped rail. Each kit includes a rack gasket plus ceiling rod & fixing bracket, elbow brackets and a 1200 x 1200 mm shower curtain.



FLEXIBLE RAILS

CR3000FLEXSLV	3000mm flexible curtain rail, silver, includes 2 x ceiling supports and fixings.
CR3000FLEXWH	3000mm flexible curtain rail, white includes 2 x ceiling supports and fixings.



Walkin Baths

If getting in and out of the bath has become an issue we have the ideal solution. We offer a range of walk in baths that are stylish and practical to use, even for bathrooms with limited space. Each bath comes with a carefully designed contoured seat for your comfort and relaxation.

JUBILEE

Length: 1685 mm, Width: 750 mm, Height: 710 mm



- The same size as a conventional bath
- Available in left or right hand entry
- Comes with integral front panel as standard
- Low threshold and wide opening door allows easy entry
- Integral seat allows upright bathing whilst enjoying bath
- Non-slip base to bath for added safety
- Turbo waste (70 l/min) as standard
- Shower Screen option available (see P.62)

Walkin Baths

ADAGIO ANCORA

Length: 1220 mm, Width: 660 mm, Height: 745–870 mm (door end) 815–940 mm (seat end)



- Ultra low threshold of only 45 mm
- Available in left or right hand entry
- Comes with integral front/end panel as standard
- Integral seat allows upright bathing whilst enjoying a deep soak
- Compact design makes excellent use of even the most limited space
- Non-slip base to bath for added safety
- Turbo waste (70 l/min) as standard

ADAGIO GRANDE

Length: 1220 mm, Width: 750 mm, Height: 890 mm (door end) 950 mm (seat end)



- Extra depth and width makes this bath ideal for someone requiring greater freedom of movement
- Available in left or right hand entry
- Comes with integral front/end panel as standard
- Integral seat allows upright bathing whilst enjoying a deep soak
- Compact design makes excellent use of even the most limited space
- Non-slip base to bath for added safety
- Turbo waste (70 l/min) as standard

Walkin Baths Options

GLASS SCREENS FOR BATHS Dimensions: Height: 1400 mm, Width: 800 mm



- 6 mm toughened safety glass
- Chrome or white finish
- High quality corrosion resistant aluminium frame
- Push-on, transparent polymer seal that can be easily removed for cleaning
- Hinged screen for easy cleaning

THERMOSTATIC MIXING VALVE TMV3 compliant




Available with 15mm or 22 mm compression fittings (please specify requirement when ordering).

A failsafe mixing valve with automatic shutoff ensures safe hot water supply to the bath.

Walkin Baths Options

LEVER BATH FILLER TAP

Available with 3" or 6" levers

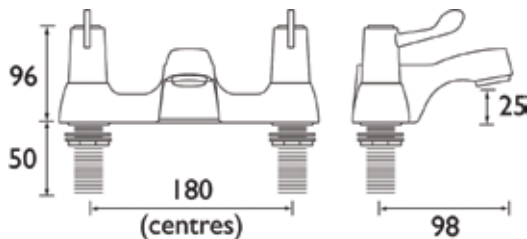

LEVER BATH SHOWER MIXER TAP

Available with 3" or 6" levers



1/4" turn 3/4" ceramic disk valve for rapid on/off flow.

MIRA EXCEL BSM



- Thermostatic temperature control ensures a constant and safe showering experience
- Separate flow and temperature controls
- Automatic maximum temperature reduction when user switches from bath to shower mode
- Easy to use lever controls
- Unique inner sleeve reduces surface temperature for even more safety
- TMV2 approved
- For installation on the top of the bath
- Four spray showerhead with rub-clean rubber nozzles for easy cleaning

Showering & Changing Tables

- Electrically & manually operated Rise & Fall showering tables for adults & children.
- UK manufactured with extended warranties available.
- Installed and commissioned by manufacturer as part of guarantee.
- Weight limit up to 190kgs

Electrically Operated Height Adjustable Changing Tables - Smaller Users

All sizes manufactured in a robust stainless steel frame with a weight capacity of 90kgs. These carer tables have a large travel range from a few centimetres off the floor to a comfortable working height of 900mm. The maximum height is 920mm. When not in use, the CT folds away to just 160mm from the wall.



Electrically Operated Height Adjustable Changing Tables - Larger Users

All sizes manufactured in a robust stainless steel frame with a weight capacity of 190 kgs. These carer tables have a large travel range from a few centimetres off the floor to a comfortable working height of 900mm. The maximum height is 1030 mm. When not in use, the CT folds away to just 240mm from the wall.



Showering & Changing Tables

Nivano Multi-Purpose Height Adjustable Changing Tables



Manufactured in a robust white stainless steel frame with a weight capacity of 135 kgs. These carer tables have a large travel range between 200 and a comfortable working height of 800mm. When not in use, the CTE folds away to 255mm from the wall.



CTE120	1200 long x 700 wide
CTE150	1500 long x 700 wide
CTE170	1700 long x 700 wide
CTE190	1900 long x 700 wide
GCTE120 - 190	Fold out guard
G.PROTEC	Guard bumper
SPLASHLONG	Anti-splash skirt - 1 m depth

Wall Mounted Neatfold Stretcher

All sizes manufactured in a robust white powder coated stainless steel frame with a weight capacity of 130 kgs. Neat and unobtrusive when stored, it can be deployed quickly & easily using just one hand. Comes with options including Fold Out Guard, Guard Bumper & Splash Curtain.



WN120	Wall mounted stretcher with support legs 1200 long x 660 wide
WN150	Wall mounted stretcher with support legs 1500 long x 660 wide
WN170	Wall mounted stretcher with support legs 1700 long x 660 wide
GWM 120 - 170	Fold out guard
G.PROTEC	Guard bumper
SPLASHLONG	Anti-splash skirt - 1 m depth

Manual Height Adjustable Changing Tables



All sizes are manufactured in a robust white powder coated stainless steel frame with a weight capacity of 112 kgs. These carer tables can be set to the height that suits each individual carer. Before the patient is hoisted onto the table bed, the carer sets the height to suit them, thereby reducing the risk of back strain. Once on the table bed, the patented mechanism makes sure that the carer cannot accidentally try to move the bed while loaded. When not in use, the CTM folds away to just 180 mm from the wall.



CTM120	Manual height adjustable lift & lock changing table 1200 x 700
CTM150	Manual height adjustable lift & lock changing table 1500 x 700
CTM170	Manual height adjustable lift & lock changing table 1700 x 700
CTM190	Manual height adjustable lift & lock changing table 1900 x 700
GUARD.CTM	Optional guard at front edge
SPLASHLONG	Anti-splash skirt - 1 m depth

Rise & Fall Baths

- Electrically operated Rise & Fall baths for adults & children.
- UK manufactured with extended warranties available.
- Installed and commissioned by manufacturer as part of guarantee.
- Weight limit 250 kgs.
- The ISIS Bath can be easily installed in any bathroom in place of an existing conventional bath.
- It is free standing allowing access for most mobile & fixed hoists.
- The adjustable height (630 - 960 mm from the floor) enables easy carer & patient use.

ISIS Height-adjustable bath

Height adjustable bath, electronically operated including one side & one end panel.



BA2 BATH	1700 mm long x 700 mm wide
BATHPALO	Additional long side bath panel
BATHPASH	Additional short side bath panel
MIXERTMV3	Mixer valve thermostatic (TMV3 compliant)
MIXERTAP	Mixer tap to suit MIXERTMV3
LTT1	Low level mixer taps for use with full length bath stretcher*
TT13	TMV2 High flow thermostatic bath/shower mixer tap
BATHSPA	Air spa system
NEATFOLD146	Integrated bath stretcher 1460 mm long
NEATFOLD166	Integrated bath stretcher 1660 mm long
NEATFOLD169	Integrated bath stretcher 1690 mm long*
NEATFOLD189	Integrated bath stretcher 1890 mm long*
BATHGUARD	Removable guard for bath stretcher
G.PROTEC.BATH	Guard bumper for bath stretcher



HS25 Head support cushion



*These stretchers can only be used with the LTT1 low level mixer taps

BSW120 Body support cushion 1200 mm

BSW180 Body support cushion 1800 mm

Rise & Fall Baths

- Electronically operated height adjustable bath for adults & children.
- Powered side door entry with hi low hand control operation.
- Free standing allowing access for most mobile & fixed hoists.
- UK manufactured with extended warranties available.
- Installed and commissioned by manufacturer as part of guarantee.
- Lifting capacity 350 kgs.
- Range of sizes from 1700 mm to 2300 mm*

VANNA High-low bath

Height adjustable bath, electronically operated with powered side door.



KS1 Knee rest/support



IHR1 Internal head rest



IBR1 Internal back rest

VANNA BATH	1700 mm - 2300 mm long x 830 mm wide
MIXERTMV3	Mixer valve thermostatic (TMV3 compliant)
MIXERTAP	Mixer tap to suit MIXERTMV3
TT13	TMV2 High flow thermostatic bath/shower mixer tap
BATHSPA	Air spa system
NEATFOLD1700	Integrated bath stretcher 1700 mm long*
NEATFOLD1900	Integrated bath stretcher 1900 mm long*
NEATFOLD2100	Integrated bath stretcher 2100 mm long*
NEATFOLD2300	Integrated bath stretcher 2300 mm long*
BATHGUARD	Removable guard for bath stretcher
G.PROTEC.BATH	Guard bumper for bath stretcher

*Please note: The Vanna Neatfolds must correspond to the length of the bath ordered

Clos-o-Mat Palma Vita

A versatile and durable shower tray range

The Clos-o-Mat Palma Vita automatic shower toilet allows less able people an increased level of privacy, independence and freedom. This toilet provides flushing, washing and warm air drying in one simple operation.


It is user friendly and an ideal choice for someone who has restricted use of their hands; one press of the flush pad by hand, elbow or body pressure triggers the operation cycle. Reduced hand contact provides improved hygiene for all users and this toilet can be used as a standard toilet at all times.

Key features

- Simultaneous flushing and washing (a unique feature)
- Improved personal hygiene – cleaning with water not paper
- Can be used at all times as a conventional WC
- Combines functions of a WC and bidet with addition of drying air
- UK made in a dedicated plant
- Clos-o-Mat's unique one-touch system allows the user to benefit from the toilet's automatic functions by just pressing and releasing the elbow pad
- Simple 'hands free' action automatic flushing, warm water washing and warm air drying
- User-friendly system guarantees the most hygienic toilet performance
- Customised to suit individual needs
- Installation and service support available
- Almost 40,000 shower toilets installed in the UK
- Complies with current electrical regulations
- Maximum load 190 Kg



HOW IT WORKS

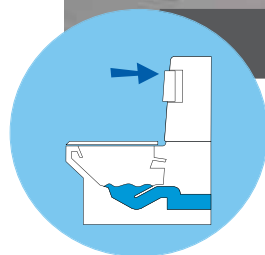


Flushing

Press either elbow pad whilst standing for conventional flushing.



Washing

Press elbow pad whilst seated and hold down for approximately 10-15 seconds, flushing and warm water washing will then take place. Wash time is adjustable to clients needs.

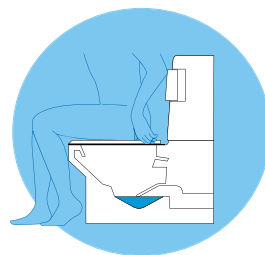

Drying

Warm air drying automatically follows when the elbow pad is released.

Clos-o-Mat Palma Vita

OPTIONAL EXTRAS

There is a range of accessories available, including toilet plinths (1), lateral body supports (2), alternative douche arms (3), soft seats (4), integrated fold-down support arms (5) and a touch sensitive hand/foot switch (6). For more information please contact us on 01886 830119.



1



2



3



4




5



6

Wall aperture for extended
douche versions

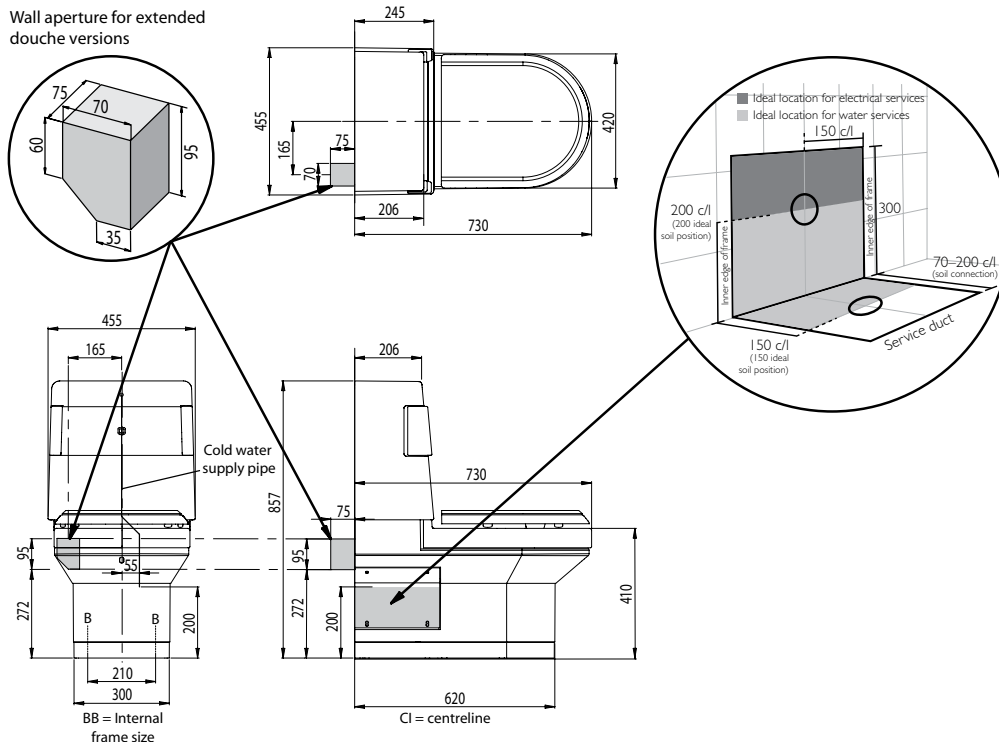

Geberit AquaClean 8000 Care

A versatile and durable shower tray range

Perfect for those who wish to maintain independence and privacy in the bathroom, the AquaClean 8000 Care shower toilet by Geberit combines all the functions of a conventional WC and bidet with the comfort of warm-air drying.

Key features

- **Warm, fresh water shower**
Air purification 3 with oscillating and pulsating spray mode for thorough and gentle cleaning
- **Warm water Lady Shower**
Supplied through a separate water feed to eliminate the risk of cross contamination
- **Dryer**
Fully extendable with unlimited duration to suit you
- **Adjustable spray arm position**
- **Air purification**
- **Disinfected shower nozzle**
- **Strengthened ergonomic seat**
- **Remote control**
For individual adjustments
- **Hands-free remote**
- **Individual temperature adjustment**
Water and dryer temperature adjustable to suit the user's liking
- **Automatic flush**
Convenient remote flushing
- **Seat height adjustable**
A built-in plinth allows for seat height adjustments from 405mm – 525mm at installation
- **Warranty**
2 years as standard. Extended warranty is available on request



Remote for personalised settings



Hands-free remote

Personalised comfort

With the remote control, you can tailor the settings of the AquaClean 8000 Care to specific needs and then save them under three separate profiles – so anybody who uses the shower toilet can enjoy the optimum experience based on their preferences and once saved the settings can be picked up by the infra-red or control panel, ensuring fuss-free individual adjustment when required. The unit also includes a button for remote flushing.

Geberit AquaClean 8000 Care

Total control at your fingertips

A simple touch to the easily located push-button control panel is enough to start the automatic pre-set sequence of washing and drying. No additional effort is required – perfect for people who might otherwise experience difficulty in the bathroom.

Touch-free operation

With the infra-red remote, using the AquaClean 8000 Care can be completely hands-free. A sensor simply detects movement and automatically starts the washing and drying sequence. All functions will only operate when a user is present. It will even flush the WC before the wash cycle – easy, private and convenient.

OSCILLATING AND PULSATING SHOWER



The shower arm extends from its protected position and a gentle, oscillating and pulsating spray of fresh, warm water washes thoroughly, before gradually cooling for a refreshing feeling. The temperature can be adjusted as required for a uniquely pleasant and hygienic experience, even for the most sensitive skin. The arm also features a separate Lady Shower for the ultimate in gentle cleansing.

THE DRYER




Once washing is complete, the AquaClean 8000 Care gently and quietly dries with a flow of pleasantly warm air. Drying is completed in minutes – leaving you feeling fresh, clean and confident. Irritating and inconvenient toilet tissue can be a thing of the past.

THE CLEANING SYSTEM



Once finished, the retracted shower nozzle is soaked and rinsed with fresh water and disinfectant before and after each use to ensure spotless cleanliness at all times.

SHOWER TOILETS

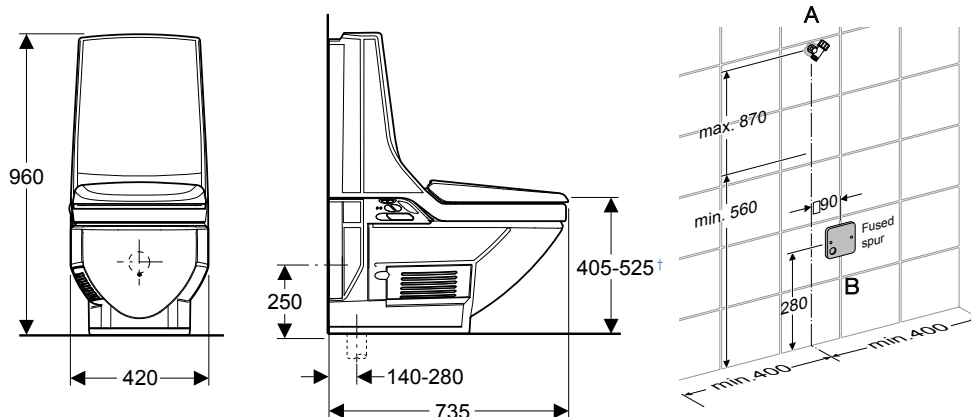

Includes: floor standing WC ceramic with ceramicplus®, plastic casing, remote control, infra-red remote, fastening material and connection parts, waste fitting, isolation valve 1/2" BSP.

Features: warm water shower, dryer, air purification, Lady shower, seat height adjustable at installation, dual flush, remote flushing, adjustable shower and dryer arm settings.

Static Commodes

STATIC COMMODE 1



- Plastic coated steel frame
- Padded seat and backrest
- Removable round plastic bowl with lid
- Stackable
- Max. user wt. 133 kgs

STATIC COMMODE 2



- Powder coated dark blue frame
- Detachable arms
- Adjustable height
- Clip on toilet seat for easy cleaning
- Light blue padding to seat and backrest
- Removable round plastic bowl with lid and handle
- Stackable
- Max. user wt. 125 kgs

STATIC COMMODE 3



- Plastic coated steel frame
- Adjustable height
- Padded seat and backrest
- Removable round plastic bowl with lid.
- Stackable
- Max. user wt. 133 kgs

STATIC COMMODE 4



- Chromium plated steel frame
- Drop down detachable arm rests
- Moulded polypropylene seat
- Plastic bowl
- Flame retardant upholstered over seat and backrest
- Max user wt. 155 kgs

STATIC COMMODE 4AD

As per Static Commode 4 but with adjustable height legs.

- Max user wt. 155 kgs

Mobile Commodes

COMMUNE 1



- Chrome plated steel frame
- Detachable arms
- 4 swivel brake castors
- Padded blow moulded seat
- Removable back
- Removable bowl with lid
- Can be wheeled over a standard toilet
- Max user wt. 125 kgs

COMMUNE 1 + FOOTREST



- Chrome plated steel frame
- Detachable arms
- 4 swivel brake castors
- Padded blow moulded seat
- Removable back
- Removable bowl with lid
- Can be wheeled over a standard toilet
- Hook on footrests
- Max user wt. 125 kgs

COMMUNE 2



- White plastic coated steel frame
- Detachable easy clean seat
- Detachable back & armrests
- Removable square plastic bowl
- 4 brake castors
- Padded seat, backrest and arms
- Toilet roll holder
- Can be wheeled over a standard toilet
- Maximum user weight: 160kgs

COMMUNE 2 + FOOTREST



- White plastic coated steel frame
- Detachable easy clean seat
- Detachable back & armrests
- Removable square plastic bowl
- 4 brake castors
- Padded seat, backrest and arms
- Toilet roll holder
- Can be wheeled over a standard toilet
- Footrest
- Maximum user weight: 160kgs

COMMUNE 3



- Chromium plated steel frame
- 4 brake castors
- Drop down arm rests
- Moulded polypropylene seat
- Plastic bowl with lid
- Flame retardant upholstered over seat and backrest
- Max user wt. 155 kgs

PUSH ON FOOTRESTS AVAILABLE

COMMUNE 3AD

As per Commune 3 but with adjustable height legs.

- Max user wt. 125 kgs

PUSH ON FOOTRESTS AVAILABLE

Toilet Plinths


Used to raise the height of toilet pans for users with limited mobility. Versatile designs will suite most standard toilet pans enabling quick and easy installation without the need to buy a special unit.

Product Ref


TP50	50 mm height
TP75	75 mm height
TP100	100 mm height
TP50BW	50 mm height, back to wall design
TP75BW	75 mm height, back to wall design
TP100BW	100 mm height, back to wall design




TP50 50 mm height

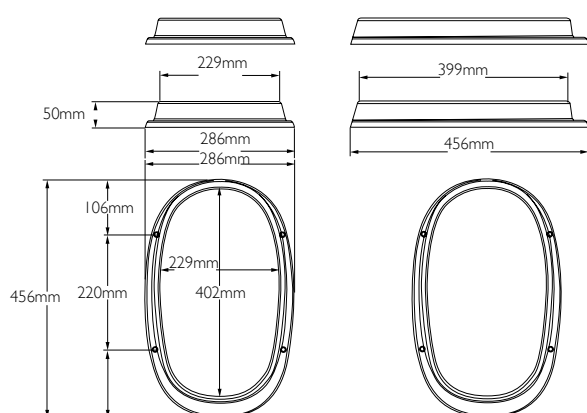


TP75 75 mm height

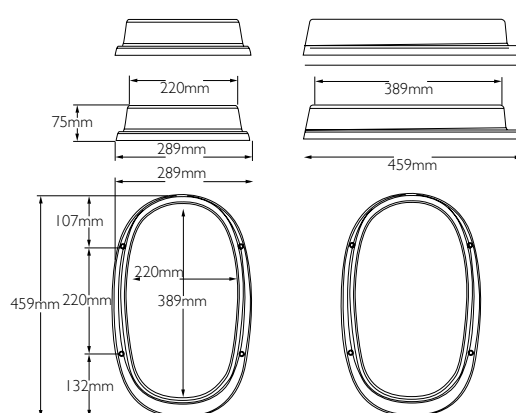

TP100 100 mm height

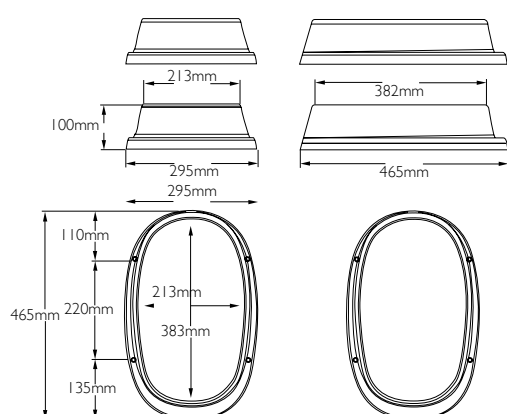

TP50/75/100BW back to wall design

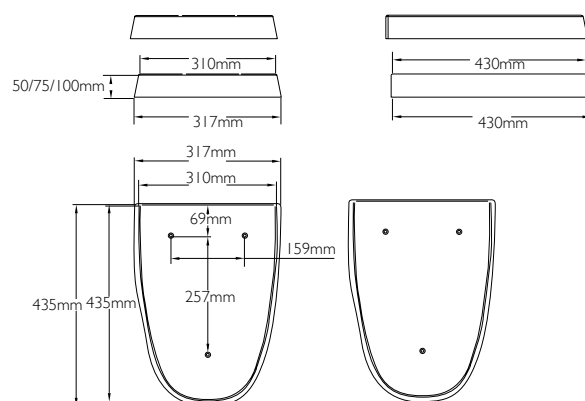

Terms & Conditions

1. Risk

- 1.1 The goods are at your risk from the time of delivery
- 1.2 Delivery takes place either; 1.2.1 at our premises (if you are collecting); or 1.2.2 at your premises or address specified by you (if we are arranging carriage)
- 1.3 You must inspect the goods on delivery. If any goods are damaged (or not delivered) you must write to tell us within two days of delivery (or the expected delivery time) You must give us (and any carrier) a fair chance to inspect the damaged goods.

2. Payment Terms

- 2.1 You are to pay us in cash or otherwise in cleared funds prior to delivery, unless you have an approved credit account.
- 2.2 If you have an approved credit account, payment is due no later than 30 days from end of the month of invoice unless otherwise agreed in writing.
- 2.3 If you fail to pay us in full on the due date:
 - 2.3.1 we may suspend or cancel future deliveries;
 - 2.3.2 we may cancel any discount offered to you;
 - 2.3.3 we may ask you to pay us interest at the rate set under s.6 of the late payment of commercial debts (interest) Act 1998
 - (a) calculated (on a daily basis) from the date of our invoice until payment
 - (b) compounded on the first day of each month; and
 - (c) before and after any judgement (unless a court orders otherwise);
 - 2.3.4. we may claim fixed sum compensation from you under s.5A of that Act to cover our credit control overhead costs; and
 - 2.3.5 we may recover the cost of taking legal action to make you pay
- 2.4 If you have an approved credit account, we may withdraw or alter your credit limit without notice.
- 2.5 You do not have the right to set off any money you may claim from us against anything you may owe us.
- 2.6 While you owe money to us, we have a lien on any of your property in our possession.
- 2.7 You are to indemnify us in full and hold us harmless from all expenses and liabilities we may incur (directly or indirectly including financing costs and including legal costs on a full indemnity basis) following any breach by you of any of your obligations under these terms.

3 Title

- 3.1 Until you pay all debts you may owe us:
 - 3.1.1 all goods supplied by us remain our property;
 - 3.1.2 you must store them so that they are clearly identifiable as our property;
 - 3.1.3 you must include them in your company insurance cover against theft or damage
 - 3.1.4 you may use those goods and sell them in the ordinary course of your business, but not if;
 - a. we revoke that right (by informing you in writing); or
 - b. you become insolvent
- 3.2 You must inform us (in writing) immediately if you become insolvent.
- 3.3 If your right to use and sell the goods ends you must allow us to remove the goods.
- 3.4 We have your permission to enter any premises where the goods may be stored.
 - 3.4.1 at any time to inspect them; and 3.4.2 after your right to use and sell them has ended, to remove them using reasonable force if necessary.
- 3.5 Despite our retention of title to the goods, we have the right to take legal proceedings to recover the price of the goods supplied should you not pay us by the due date.

4. Warranties

- 4.1 We warrant that the goods will:
 - 4.1.1 comply with their description on our order confirmation form; and
 - 4.1.2 be free from material defect for the period indicated in this brochure or 12 months from the date of delivery (as long as you comply with clauses 4.3 and 4.4) whichever is the longer.
- 4.2 We give no other warranty (and exclude any warranty, term or condition that would otherwise be implied) as to the quality of the goods or their fitness for any purpose.
- 4.3 You must ensure that;
 - 4.3.1. the goods are not modified or defectively installed;
 - 4.3.2 the goods are used and operated in accordance with any instructions that may have been notified to you;
 - 4.3.3 you have taken reasonable steps to draw to the attention of all persons using or proposing to use the goods, of all information instructions and warnings in respect of the goods supplied.
- 4.4 If you believe that we have delivered goods which are defective in materials or workmanship, you must;
 - 4.4.1 inform us (in writing) with full details, as soon as possible; and 4.4.2 allow us to investigate (we may need access to your premises and product supplied)

- 4.5 If the goods are found to be defective in material or workmanship (following our investigations, and you have complied with those conditions (in clauses 4.3 and 4.4) in full, we will (at our option) repair or replace the goods
- 4.6 We are not liable for any other loss or damage (including indirect or consequential loss, financial loss, loss of profits or loss of use) arising from the contract or the supply of goods or their use, even if we are negligent.
- 4.7 Our total liability to you (from one single cause) for damage to property caused by our negligence is limited to two million pounds.
- 4.8 For all other liabilities not referred to elsewhere in these terms our liability is limited to damages to the price of the goods,

5 Specification

- 5.1 We reserve the right to make any changes in the specification of our goods which are necessary to ensure they conform with any applicable safety or other statutory requirements.
- 5.2 We also reserve the right to make without notice any minor modifications in our specifications we think necessary or desirable.
- 5.3 Any weights, dimensions, capacities, ratings and general description contained in our catalogues, advertising material are illustrative only and will not form any part of the contract between us.
- 5.4 You must pass onto any person using or proposing to use the goods any information or instructions supplied by us regarding the use, safe handling or installation of the goods.
- 5.5 You must observe and adhere to any information, instructions or recommendations regarding the goods and must not use, modify or install the goods in a manner which has not been approved by us.

6 Return of goods

We will accept the return of goods from you only; 6.1 by prior arrangement (confirmed in writing) and; 6.2 where the goods are as fit for sale on their return as they were on delivery

7. Waiver and variations

- 7.1 Any waiver or variation of these terms is binding in honour only unless:
 - 7.1.1 made (or recorded) in writing;
 - 7.1.2 signed on behalf of each party; and
 - 7.1.3 expressly stating an intention to vary these terms.
- 7.2 All orders that you place with us will be on these terms (or any that we may issue to replace them) By placing an order with us, you are expressly waiving any printed terms you may have to the extent that they are inconsistent with our terms.

8. Force majeure

- 8.1 If we are unable to perform our obligations to you (or able to perform them only at unreasonable cost) because of circumstances beyond our control, we may cancel or suspend any of our obligations to you, without liability.
- 8.2 Examples of those circumstances include act of God, accident, explosion, war, terrorism, fire, flood, transport delays, strikes, and other industrial disputes and difficulty in obtaining supplies.

9. General

- 9.1 English law is applicable to any contract made under these terms. The English and Welsh courts have non-exclusive jurisdiction.
- 9.2 If you are more than one person, each of you has joint and several obligations under these terms.
- 9.3 If any of these terms are unenforceable as drafted: 9.3.1 it will not affect the enforceability of any other of these terms; and 9.3.2 if it would be enforceable if amended it will be treated as so amended.
- 9.4 We may treat you as insolvent if;
 - 9.4.1 you are unable to pay your debts as they fall due; or
 - 9.4.2 you (or any item of your property) become the subject of:
 - a. any formal insolvency procedure (examples of which include receivership, liquidation, administration, voluntary arrangements (including a moratorium) or bankruptcy);
 - b. any application or proposal for any formal insolvency procedure; or
 - c. any application, procedure or proposal overseas with similar effect or purpose.
- 9.5 All brochures, catalogues and other promotional materials are to be treated as illustrative only. Their contents form no part of any contract between us and you should not rely on them in entering into any contract with us.
- 9.6 Any notice by either of us which is to be served under these terms may be served by leaving it at or by delivering it to (by first class post or by fax) the other's registered office or principle place of business. All such notices must be signed.
- 9.7 No contract will create any right enforceable (by virtue of the Contract (Right of Third Parties) Act 1999) by any person not identified as the buyer or seller.
- 9.8 Nothing in these terms affects or limits our liability for fraudulent misrepresentation.



Get in touch

Telephone

01886 830119

Facsimile

01886 830118

Email

info@practicalcareproducts.com

Website

www.practicalcareproducts.com

Practical Care Products Ltd

Upper Interfields

Leigh Sinton Road

Malvern

Worcestershire

WR14 1UT