2017





Practical Care Products Independent showering and living aids

www.practicalcareproducts.com

Welcome to our independent showering and living aids brochure

At Practical Care Products (PCP) we specialise in products to help people who are less able, particularly in the bathing and showering environment. Over the last 15 years, we have established a reputation for quality products supplied at reasonable prices, servicing Local Authorities, Housing Associations, Technical Officers, Architects, Builders, Occupational Therapists, Nursing & Care Homes as well as Private Clients.

Quality

PCP aims to provide a range of quality products for use in the home. Most are covered by extended warranty periods as standard. If there are questions regarding product quality, we have a no quibble guarantee policy.

Service

PCP is committed to providing a first class service. Most of our products are held in stock at our Malvern warehouse ready for immediate distribution throughout the UK & Eire.

Telephone 01886 830119

Email info@practicalcareproducts.com

Surveying & Design

We offer a complete Surveying Service for any Bathroom Adaptation required. A member of our experienced staff will personally visit to take measurements to produce a computer aided design. We will take into account all requirements of the user and any constraints of the building to produce the best possible solution to meet the client's needs.

If you require sales or technical assistance then please do not hesitate to contact us.

Facsimilie 01886 830118

Visit our website www.practicalcareproducts.com

Grab & Support Rails "Easy Feel", stainless steel, steel & soft grip, support rails	4-11
Shower Seats	12-19
Level Access Showering Level Dec "EasyFit", Level Grade, waste drainage	20-29
Low Access Showering Slimline, Radiate, Blackdown & Mendip shower trays	30-41
Shower Doors & Screens	42-55
Cubicles	56-63
Shower Units, Mixers, Curtains & Rails	64-71
Walk-in Baths Baths, screen, taps	72-74
Shower/Changing Tables Shower/changing tables	75-77
Rise & Fall Baths Rio , Kiva, Vanna & Avero	78-79
Specialist WC & Bathroom Products Clos-O-Mat, Geberit, Raised WC, Basins, Taps, Doc M, Commodes & Plinths	80-90

"Easy Feel" Grab Rails

Stainless steel, steel & Soft Grip Rails

Support Rails



The Practical Care Products "Easy Feel" plastic fluted grab rail is available in a variety of sizes, colours and angles. The range includes rails with covered flanges and flat ended fixing flanges suitable for indoor and outdoor use.

Our range of steel, stainless steel and soft grip rails ensure that all requirements are met in and around the home.


For extra peace of mind we offer a range of support rails your safety, comfort and independence around the home.


"Easy Feel" Grab Rails

STRAIGHT WHITE & COLOURED









Α	В	С	D
300	92	50	31
450	92	50	31
600	92	50	31
900	92	58	35
	300 450 600	300 92 450 92 600 92	A B C 300 92 50 450 92 50 600 92 50 900 92 58






Easily removable flange cover.




FLAT ENDED FIXING

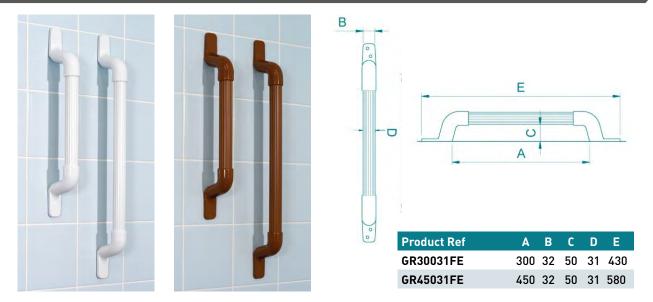


"Easy Feel" Grab Rails

45° WHITE & COLOURED







Product Ref	Α	В	С	D
GR300X30031-45	300	92	50	31
GR450X45031-45	450	92	50	31
GR600X60031-45	600	92	50	31

90° WHITE & COLOURED





Product Ref	Α	В	С	D
GR300X30031-90	300	92	50	31
GR450X45031-90	450	92	50	31
GR600X60031-90	600	92	50	31

0


We suggest that installation of grab rails is always carried out by a suitably qualified trades person. The selection and use of appropriate wall fixings will vary depending upon the type of wall and the conditions of the wall in each individual circumstance.



Steel & Soft Grip Rails


Designed to make installation even easier

FLAT ENDED STRAIGHT





FLAT ENDED OFFSET (WHITE)



OPEN FLANGED STEEL RAILS



Available in 4 lengths, 25mm diameter tube with open flanges and 3 fixing points.

(POWDER COATED WHITE)

Product Ref	Length
GR30025PCW	300mm
GR45025PCW	450mm
GR60025PCW	600mm
GR90025PCW	900mm

Soft Grip Rails

"PRIMA" SOFT GRIP GRAB RAILS

The "Prima" rails feature integral soft grip mouldings to aid grip. Each rail is manufactured as a single piece unit with an Aluminium tube core. The ergonomical grip is comfortable and warm to the touch.



Available in 6 sizes, as a Mint/White (MW) or an all White (WW) combination.

4 straight rails, oval shaped 35 mm maximum width with concealed flanges and 2 offset fixing points.

Product Ref	Length
GR30035PRIMAMW/WW	300 mm
GR45035PRIMAMW/WW	450 mm
GR50035PRIMAMW/WW	500 mm
GR60035PRIMAMW/WW	600 mm


2 Angled Rails 45°, oval shaped 35 mm maximum width with concealed flanges and 2 offset fixing points.

Product Ref	Dimensions
GR175X17535PRIMAMW/WW	175x175 mm
GR250X25035PRIMAMW/WW	250x250 mm

Stainless Steel Rails

CONCEALED FLANGED STAINLESS STEEL RAILS








	A	
4	C	
	D	\square
G	ł	B


Product Ref	Α	В	С	D	
GR30032SSCF	300	77	45	32	
GR45032SSCF	450	77	45	32	
GR60032SSCF	600	77	45	32	
State of the local division of the local div					





Product Ref E Α В С D **GR30032SSCLUX** 200 77 50 32 355 GR45032SSCLUX 300 77 50 32 457 **GR60032SSCLUX** 400 77 50 32 578






N						
Product Ref	Α	В	С	D	Е	
GR30035SSCLUX	250	77	50	35	355	

GR45035SSCLUX 350 77 50 35 450 **GR60035SSCLUX** 500 77 50 35 600

NEWEL RAILS - STEEL





Steel powder coated white. Fit to Newel posts of staircase with 3 fixing points. Left & Right handed available.


Left hand illustrated.

Hinged Support Rails

Standard and heavy duty


HSRLEGPCW740x28 Wall mounted hinged support rail, 740 mm projection from wall






- Steel powder coated white
- Adjustable height folding leg
- Clip retention of hinged rail when raised for added safety.

HSRLEGPCW690x28 Wall mounted hinged support rail, 690 mm projection from wall





- Steel powder coated white
- Adjustable height folding leg
- Spring loaded locking mechanism
- when raised for added safety.

HSRPCW690x28 Wall mounted hinged support rail, 690 mm projection from wall




	52		125
	2		
q	t	2	· · ·
			N

- Steel powder coated white
- Spring loaded locking mechanism
- when raised for added safety.

Heavy Duty Hinged Support Rails

All of our standard heavy duty hinged support rails are steel powder coated white and have a heavy duty cast aluminium wall mounting plate.

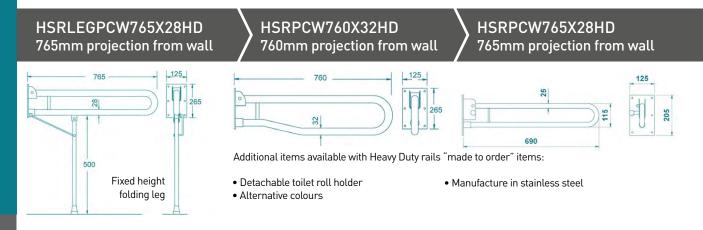


Support Rails

FCP2750 Floor to Ceiling Pole

FCPEXTENSION Floor to Ceiling Pole Extension

Steel, plastic ribbed for non slip surface. 35 mm diameter, 2750 mm long, with 1 fixed & 1 loose flange. Pole can be cut down on site if required.

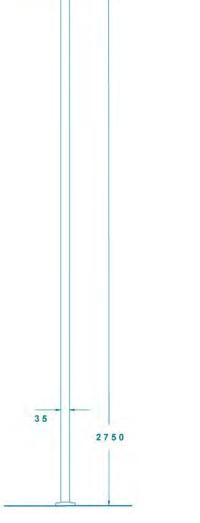



For use with floor to ceiling poles supplied with doors sets only, 600 mm long. (See pages 44-47).

•••

FWP740x700 Floor to Wall Rail

Steel powder coated white


740 x 700 mm, with fixed flanges. 3 hole flange fixing. 700 35 740



FWP740x700PVCR Floor to Wall Pole (with ribbing)

Steel powder coated white

740 x 700 mm, with fixed flanges. 3 hole flange fixing with plastic ribbed sleeving and in stainless steel as "made to order" items.





Wall Mounted Shower Seats

Wall Mounted Shower Seats Heavy Duty/Extra Wide

Free Standing Shower Chairs & Stools Our shower seat range offers quality, function and great value. Seats are available unpadded or with a choice of blue or grey padding, fully height adjustable support legs and independently articulating arms to ensure your safety and comfort whilst showering.

A range of wall mounted seats of fold down design, all with retractable legs, fully height adjustable, with and without back and armrests, specifically designed for clients where extra support is required.

Where a wall mounted seat is not appropriate, we offer a range of free standing shower chairs and perching stools for your comfort.

Wall Mounted Shower Seats

Fold Down Hinged Seats with Supporting Legs

Key features

- Wide variety of seat types to suit most clients needs
- Height adjustable support legs with locking pin provides complete horizontal seat position
- Large wall mounting surface and extending support legs give excellent rigidity when installed
- Hard wearing plastic moulded seats with drainage holes for easy cleaning
- Removable moulded seats
- Aluminium frame, powder coated for strength and durability
- Corrosion resistant stainless steel fixings as standard
- All seats have a weight capacity of over 150 kgs

7 mm HOLES



LS490


Weight capacity	160	kg

Depth from wall when folded 150 mm




Depth from wall when folded 90 mm Weight capacity 190 kgs





Fold down shower seat, wall mounted. Aluminium frame with adjustable height supporting legs, white powder coated.

LP463BL



Fold down shower seat, wall


mounted. Aluminium frame with adjustable height

coated. Blow moulded white

support handles.

easy to clean seat with built in


supporting legs, white powdered



Fold down shower seat, blue seat pad, wall mounted.

LP463GR

Depth from wall when folded 95 mm Weight capacity 190 kgs



Fold down shower seat, pale grey seat pad, wall mounted. Aluminium frame with adjustable height supporting legs, white powder coated.

Aluminium frame with adjustable height supporting legs, white powder coated.



Wall Mounted Shower Seats

Fold Down Hinged Seats with Supporting Legs, Back & Arms


BS482BL

Depth from wall when folded 160 mm Weight capacity 190 kgs

BS482GR

Depth from wall when folded 160 mm Weight capacity 190 kgs






Fold down shower seat, wall mounted. Aluminium frame, white powder coated, adjustable height supporting legs, blue padded back rest and independently articulating blue padded arms rests.

Depth from wall when folded 170 mm

Weight capacity 190 kgs






Fold down shower seat, wall mounted. Aluminium frame, white powder coated, adjustable height supporting legs, pale grey padded back rest and independently articulating pale grey padded arms rests.

Depth from wall when folded 170 mm


BP482BL





Fold down shower seat, blue seat pad, wall mounted. Aluminium frame, white powder coated, adjustable height supporting legs, blue padded back rest and independently articulating blue padded arms rests.

BP482GR



Weight capacity 190 kgs

Fold down shower seat, pale grey seat pad, wall mounted. Aluminium frame, white powder coated, adjustable height supporting legs, pale grey padded back rest and independently articulating pale grey padded arms rests.

Adjustable height support legs







"Slimfold" Shower Seats

Key features

- Available either as a simple bench, or full seat with a backrest and arms.
- When folded the seat has a projection of only 111mm and the bench is just 55mm.
- Uses cross bracing wall supports instead of traditional floor standing legs. Prevents the risk of trapping toes or banging feet, or of excessive weight on the legs damaging the floor.
- Seat height from 417mm upwards.
- Maximum weight capacity 300kgs (47 stone).

BENCH SEAT





Blue (standard) Code: SFBSBL

Grey (standard) Code: SFBSGR



Sandstone (special order) Code: SFBSSS

500mm




Black Granite (special order) Code: SFBSBG



White (special order) Code: SFBSWH

381mm



SHOWER SEAT



Blue (standard) Code: SFSSBL





415mm

Grey (standard) Code: SFSSGR



Sandstone (special order) Code: SFSSSS




767mm


111mm

Code: SFSSBG





White (special order) Code: SFSSWH



TEL 01886 830119 www.practicalcareproducts.com

654mm

943mm

Wall Mounted Shower Seats

Heavy duty, extra wide


BP539

Depth from wall when folded 180 mm Weight capacity 190 kgs

BP539HS


Depth from wall when folded 180 mm Weight capacity 190 kgs





Fold down padded shower seat, wall mounted. Aluminium frame with adjustable height supporting legs, independently articulating arm rests, white powder coated with light grey padded back & seat.





Fold down padded open fronted "Horse Shoe" shower seat, wall mounted. Aluminium frame with adjustable height supporting legs, independently articulating arm rests, white powder coated with light grey padded back & seat.




Weight capacity 222 kgs

BP620GR

Depth from wall when folded 230 mm Weight capacity 222 kgs








EXTRA WIDE

Fold down shower seat, wall mounted. Aluminium frame, with adjustable height supporting legs, back and arm rests, white powder coated seat padding available in blue.



EXTRA WIDE

Fold down padded shower seat, wall mounted. Aluminium frame, with adjustable height supporting legs, back and arm rests, white powder coated. Back and seat padding available in blue.

Free Standing Stools & Chairs

PSC Weight capacity 190 kgs



Portable shower chair with fixed arms. Fixed height. Heavy Duty steel frame, powder coated white. White plastic seat.



Portable shower chair with fixed arms. Adjustable height supporting legs. Steel frame, powder coated white. White plastic seat.

PSC490 Weight capacity 100 kgs




480	490 OR 530 110 OR 150

Portable shower chair. Aluminium frame with adjustable height supporting legs. Blow moulded white easy to clean back rest & seat with built in support handles.

PSS490 Weight capacity 100 kgs

PSCLEG Weight capacity 140 kgs




400 TO 475

Portable shower stool. Aluminium frame with adjustable height supporting legs. Blow moulded white easy to clean seat with built in support handles.

PSS Weight capacity 100 kgs






Portable shower stool. Aluminium frame with adjustable height supporting legs. Blow moulded light grey easy to clean circular seat.


SHOWER SEATS



Level-Dec EasyFit

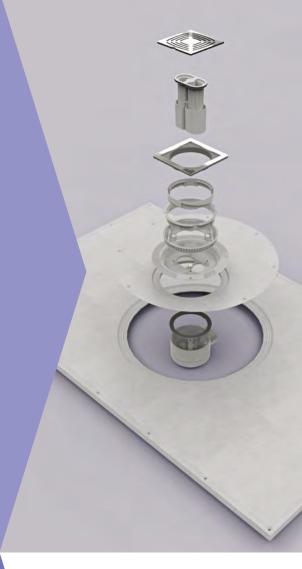

Level Grade

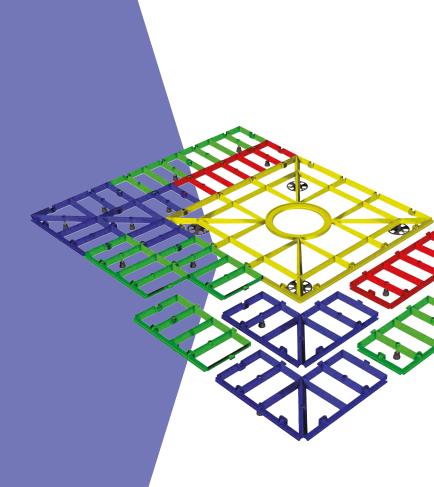


The Level-Dec EastFit wet room floor formers are pre-formed to give a "real" level access shower base that, when set into the floor, can either be completely covered with non-slip vinyl flooring or tiles, thus providing a step free and unrestricted shower area. An adjustable waste position gives great flexibility when mounting the Level Dec EasyFit onto a joisted floor.

Made from colour coded modular sections that click together to form a grid like structure, the Level Grade is designed to produce a consistent gradient to screeded concrete floors with ease every time.


Level-Dec EasyFit for Vinyl or Tiled Floors


A revolutionary new design to make installation easier

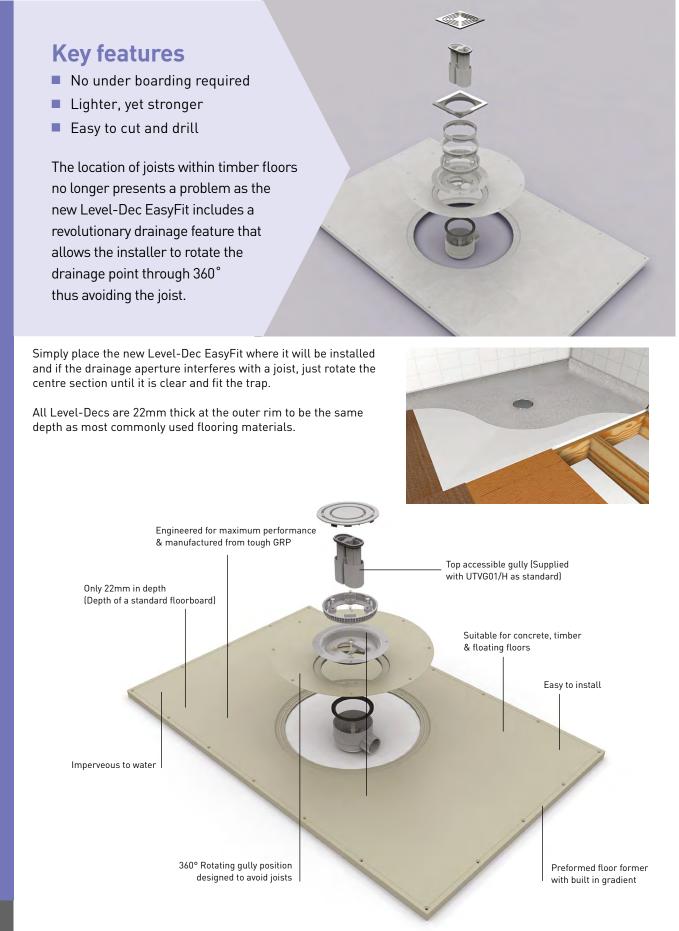


Level-Dec Size Options



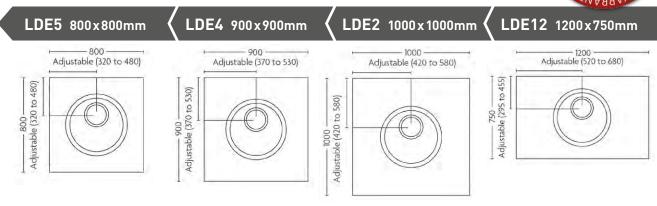

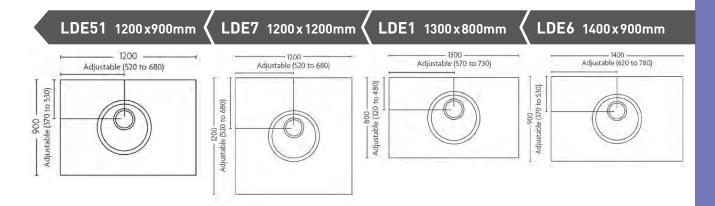

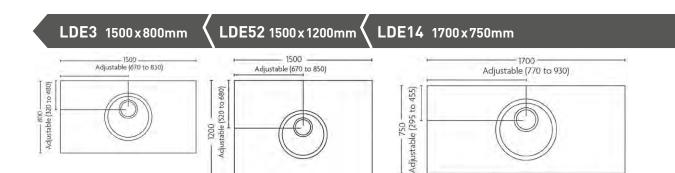


For vinyl floors, supplied with UTVG01/H vinyl floor gully with horizontal outlet as standard. Alternative options are available. See website for details.

For the floors we offer the option of a Level-Dec stainless steel waste and membrane package.


All Level Dec EasyFit trays are trimmable.

LDE8 1850x900mm




Level-Grade

The Level-Grade sizes are made up of colour coded modular sections. Each section clicks together to form a matrix structure of various sizes and shapes. The Level-Grade is available in several pre packaged sizes. The packs are supplied boxed in kit form. Additional sections can be purchased individually.

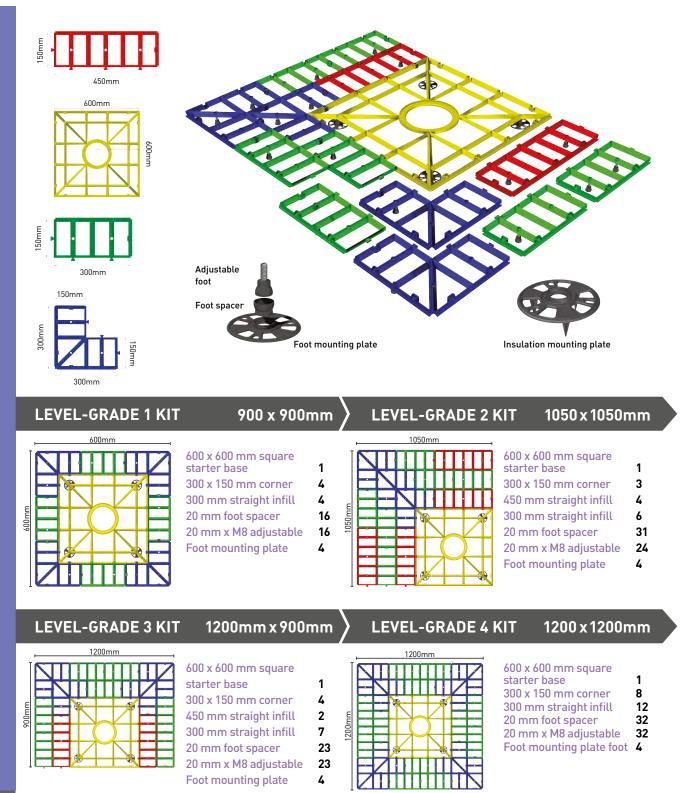


Level-Grade Size Options


LEVEL-GRADE 5 KIT




LEVEL-GRADE 6 KIT



LEVEL-GRADE 7 KIT



LEVEL-GRADE 8 KIT



1350 X 1350mm

600 x 600 mm square starter base	1
300 x 150 mm corner	5
450 mm straight infill	6
300 mm straight infill	16
20 mm foot spacer	76
20 mm x M8 adjustable foot	42
Foot mounting plate	4

1500 X 1050mm

600 x 600 mm square starter base	1
300 x 150 mm corner	6
450 mm straight infill	4
300 mm straight infill	12
20 mm foot spacer	47
20 mm x M8 adjustable foot	35
Foot mounting plate	4

1500 X 1500mm

600 x 600 mm square starter base	1
300 x 150 mm corner	12
300 mm straight infill	24
20 mm foot spacer	72
20 mm x M8 adjustable foot	52
Foot mounting plate	4

1800 X 1200mm

1
8
4
22
77
50
4



Installation instructions available on our website. www.practicalcareproducts.com/downloads

Shower Wastes for Vinyl Wetroom floors

All of the gravity wastes shown here allow top access for easy cleaning and maintenance. The options available cover all possible types of gravity installation when fitting a shower tray, wet floor former or a screeded wet floor, both vinyl & tiled finish.

UTVG01/H for vinyl flooring Depth 103mm



The UTVG01/H with horizontal outlet is standard with the Level-Dec EasyFit. Used in conjunction with the new trap which when connected to the trap-a-dapta only measures a depth of 103mm. The other benefits being the 50mm water seal and the two part installation operation.

Also available with chrome effect cover plate UTVC01/H.

UTVG01/V for vinyl flooring Depth 138mm



The trap-a-dapta is also available with a vertical bottom outlet trap that measures 138mm from top to bottom, which is often required on new build projects.

Also available with chrome effect cover plate UTVC01/V.

Pumped Waste TAD3 for vinyl flooring Depth 40mm



Also available for tiled floors: TAD4 Depth 40mm

This waste is designed for use with Level-Decs and screeded wet floor showers where gravity drainage is a problem. It is compatible with most shower waste pumps and it has the added benefit of having a 22mm outlet as opposed to the standard 15mm. The new improved design allows more efficient drainage.

SLW1 Slimline waste for vinyl flooring Depth 83mm



Also available for tiled floors HCDSLT An extremely shallow trap with an overall depth of just 83 mm. This is a waterless trap with a one-way rubber membrane seal, specifically designed for use in areas where floor depth is minimal. Suitable for push-fit or solvent weld fitting, flow rate of up to 33L/min, 40mm outlet.

McAlpine TSG50WH Depth 90mm



An alternative to the UTVG01/H

This large horizontal wet floor gully can be fitted as an alternative to the UTVG01/H. Its design means that it must be fitted to a Level-Dec before locating the Dec in the floor. It is also available as a vertical outlet version TSG2WH.






This large horizontal wet floor gully has a stainless steel cover plate. It can be fitted as an alternative to the UTVG01/H. Its design means that it must be fitted to a Level-Dec before locating the Dec in the floor.

TEL 01886 830119 www.practicalcareproducts.com

Drainage Options

UT/BC Bath Adaptor

The bath adaptor allows you to install a wetroom floor, with a bath above to meet the needs of tenants today, whilst allowing for a simple and economical conversion to a level access wetroom, to suit future requirements.

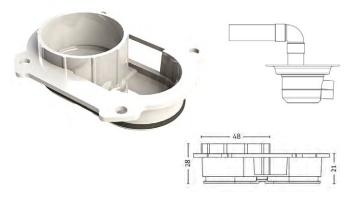



Shower Wastes for Tiled Wetroom floors



The HCDSLT is designed for tiled floor coverings. With stylish stainless steel grate. A waterless trap with a one-way rubber membrane seal, specifically designed for use in areas where floor depth is minimal.

HCDP Tiled Floor Gully for Pumped Waste Depth 33mm

HCDH Tiled Floor Gully Horizontal Outlet Depth 103mm



Height adjustable stainless steel top with 50mm water seal. Suitable for floor tiles between 6mm and 26mm in depth. Vertical gully options available on request.

Also available with vertical bottom outlet trap (depth 138 mm).

HCDSLT Tiled Floor Slimline Waste Horizontal Outlet Depth 83mm



Height adjustable stainless steel top. Suitable for floor tiles between 6mm and 26mm in depth. Allows water to be pumped away when used in conjunction with waste pump.

Wetroom Floor – Waterproofing

When you need to waterproof a shower or wetroom area quickly and safely we have the answer. The Tilesafe[®] membrane is a cold-applied, self-adhesive, waterproof membrane which consists of a thick rubberised waterproof layer, incorporating a woven glass fibre mesh on one side.

Benefits

- Quick and easy to apply
- Simple to detail in critical areas
- Ideal for suspended timber floors
- Allows for movement in substrates
- Compatible with all quality adhesives
- Cost effective solution

Tilesafe® Kits

TS2 5m² kit

• 10m² of Tilesafe[®] membrane

TS1 10m² kit

- Tilesafe[®] primer
- Reinforcing tape
- Jointing compound
- Putty

- 5m² of Tilesafe[®] membrane • Tilesafe® primer
- Reinforcing tape
- Jointing compound
- Putty

TS3 10m² kit	TS4 5m² kit	angle TS5 10m² kit $ angle$	TS6 5m² kit
 10m² of Waterguard[®] membrane 15m jointing tape 1 x external corner 500ml BAL primer 4 x internal corners Butyl sealant Self adhesive 	 5m² of Waterguard[®] membrane 15m jointing tape 1 x external corner 500ml BAL primer 4 x internal corners Butyl sealant Self adhesive 	 10m² of Fabric membrane 4 x internal corners 25m jointing tape 1 x external corner Adhesive not supplied 	 5m² of Fabric membrane 4 x internal corners 12.5m jointing tape 1 x external corner Adhesive not supplied
urman and urman			0

Waterguard[®] Kits **Fabric Membrane**

Shower Waste Pumps

Many buildings, particularly modern ones, have solid floors. This makes it difficult to use a gravity waste on a level or low access shower. While we would always recommend that a pumped waste is the last choice option, it is sometimes unavoidable.





- Low maintenance, with no filters to clean
- Flow switch for automatic operation
- Will clear up to 14 Litres per minute from a shower
- Top & bottom suction compatible
- Shallow shower trap supplied as standard for use with Blackdown trays
- Compatible with wet floor gully
- Low voltage variable speed transformer





- Pump is wired directly into shower unit for instant operation
- No flow switch easier & cheaper to fit
- Low maintenance, with no filters to clean
- Will clear up to 14 Litres per minute from a shower
- Compatible with wet floor gully
- Low voltage variable speed transformer

PUMP INSTANT MATCH Whale direct wired self regulating kit



- Pump is wired directly into shower unit, no flow sensor, for instant operation, making it easier and cheaper to fit
- Multi speed low voltage transformer which varies the operating speed of the motor to avoid any sucking of air
- Low maintenance, with no filters to clean
- Will clear up to 14 Litres per min from a shower
- Shallow shower trap supplied as standard

Dry Deck 20 Shower Waste Pump

- Top & bottom suction compatible
- Compatible with wet floor gully

PUMP INSTANT MATCH SENSOR Whale flow sensor self regulating kit



- Low noise shower waste pump compatible with all standard electric showers
- Electronic flow sensor detects flow rate to shower unit, fitted to cold water feed pipe
- Multi speed low voltage transformer which varies the operating speed of the motor to avoid any sucking of air
- Low maintenance, with no filters to clean
- Will clear up to 14 Litres per min from a shower
- Shallow shower trap supplied as standard
- Top & bottom suction compatible
- Compatible with wet floor gully



- The flow rate of the Dry-Dec 20 system automatically adjusts to changes in shower flow rate
- Almost silent when running
- No filters in waste system no cleaning required
- Valves integral to the pump prevent odours escaping from the drainage pipe
- Maximum flow rate 20 ltr/min
- 5 year warranty

• Shallow shower trap supplied as standard • Top & bottom suction compatible



Blackdown Range

Mantis Range

Mendip Range

Radiate Range

A stylish Slimline tray offering low-level access at only 35mm high. These trays can be recessed into the floor or fitted with a sloping ramp around the entire perimeter for easier access, which is ideal for wheelchair access.

The Blackdown shower Tray is both versatile and durable. 35mm high and self supporting, it can be set virtually level access in the floor or ramped. There are 10 size options and it is compatible with our doors and pumps.

The Mantis shower tray is the lowest tray on the market at only 24 mm. The tray is strong and self supporting with a new slip resistant surface.

The Mendip shower tray, often referred to as the "above ground waste tray" is 90mm high and is ideal for situations where the floor cannot be breached and the waste cannot be pumped. There are 7 size options available.

The Radiate shower tray is an above floor pumped waste option. 40mm high, for unbreachable floors, all pipework sits between tray and floor. Fully self supporting. 14 size options available.

Blackdown Range

A versatile and durable shower tray

LIFETIME NARRANTA

Key features

- Only 35mm high
- Can be set into floor for level access
- Self supporting
- Not-handed
- Separate tiling strip (included)
- Trap should avoid joists
- Solos trap 50mm water seal (included)
- Optional ramps
- Optional service ducting
- Waste pump compatible
- Suits standard & Rise Slider doors
- Suits carer screens

SOLOS DALLMER supplied with all trays




Has a 40mm outlet with a flexible ball joint to make connecting the waste easier. The trap also has a 50mm water seal making it compliant with building regulations. Top access for easy cleaning.

Cut-to-length to suit your space

There are four sizes that can be cut to length to fit between two walls and finished off with a separate tiling return.

Solos Dallmer Somm Waterseal Tiles cover tiling strip Self adhesive tiling strip Slip resistant tread plate for increased safety Figure 1 adhesive tiling strip Slip resistant tread plate for increased safety Self adhesive tiling strip Slip resistant tread plate for increased safety Self adhesive tiling strip Slip resistant tread plate for increased safety Self adhesive tiling strip

Blackdown Range Size Options

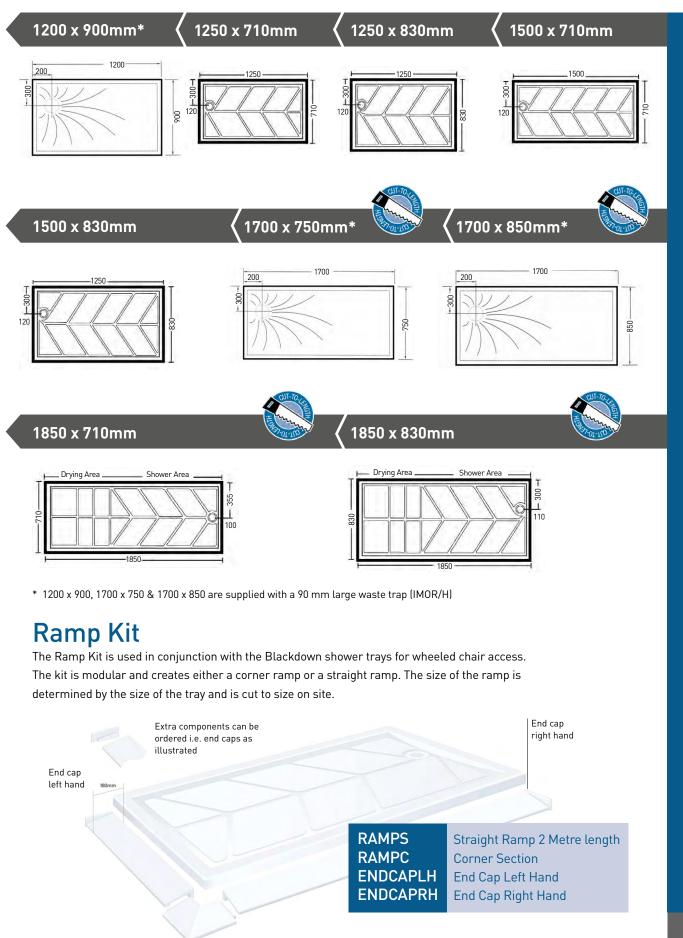

Slimline Range

Low Level Shower trays

Key features

- Low profile shower tray only 35 mm
- Surface mounted or recessed into floor giving true level access at installation
- Robust GRP construction will support up to 250 kgs (40 stone)
- Access ramps available to give easy access if tray is surface mounted (80 mm wide)
- Slip resistant easy clean surface & tread pattern, tested and qualified in accordance with DIN 51097 Class "A"
- Mid point off set waste drain position giving an impressive 38 Litres per minute flow rate capacity
- Large 90 mm waste supplied
- Suited for use with electric showers and mixer

SERVICE DUCTING, RAMP KIT AND INFILL POSTS








Can be recessed into floor for level access.

Tiling upstand and 90mm trap supplied as standard with each Slimline tray. Alternative waste options available. Please specify when ordering.



TEL 01886 830119 www.practicalcareproducts.com

Slimline Range Size Options

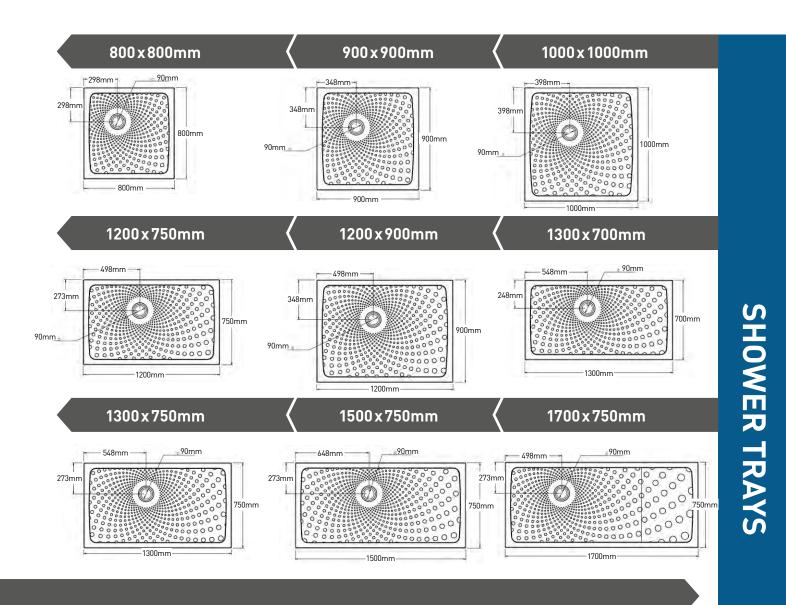


Service Ducting

Used to hide pipework, sink wastes etc behind panels constructed of heavy duty GRP instead of chasing out floors and walls. The ducting is available in two lengths for use with the Blackdown shower tray range.

These lengths can be cut to size on site. The top edge is a tiling lip and the bottom flange is screwed down with self tapping screws and then siliconed to the tray.

Infil Posts

Used in conjunction with screen sets & Service Ducting, the infil post is located on top of the Service Ducting and fills the space created by the ducting above the height of the ducting itself.





35

Mendip Range


Low Level Shower trays for unbreachable floors

WARRANTA . WARRANTA .


Key features

- Self supporting low step tray with gravity waste – only 95 mm high
- Surface mounted on unbreachable floors.
 Slip resistant satin surface, tested in accordance with DIN 51097:1992 Class "A"
- Central edge fitted waste drain position with unique factory fitted waste with multi directional 40 mm outlet & 50 mm water seal. Includes inspection chamber to access trap
- All waste pipework is above floor, underneath the tray. Ideal for multi storey residential developments
- Ideally suited for use with electric showers, no waste pump required

Easy clean surface

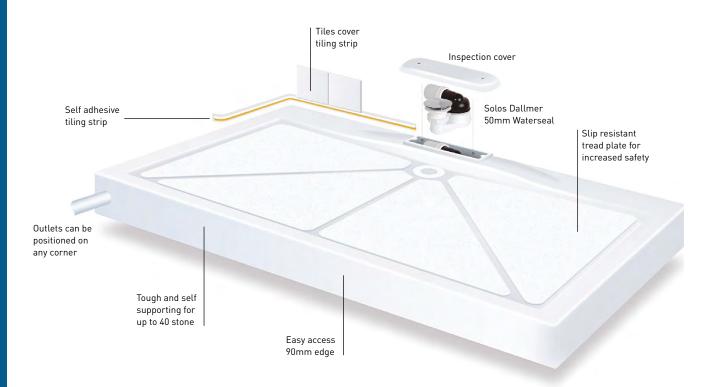

Mendip Range Size Options

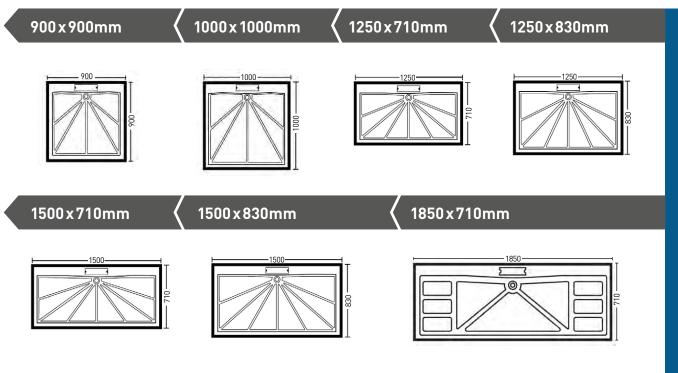

Optional accessories

RAMPSM

RAMPSTEPM

Mendip Shower Tray Ramp

The Mendip ramp is purchased as a separate item and is used when a wheel chair is required. The ramps overall width is 900mm and the overall depth is 400mm.

Mendip Shower Tray Half Step

The Mendip half step is a means of making it easier to step on the shower tray. The steps overall width is 720mm, the depth is 300mm and 50mm high.





www.practicalcareproducts.com/downloads

Radiate Range


Low Level Shower trays for unbreachable floors



Key features

- The low profile shower tray with pumped waste – only 40 mm high.
- Surface mounted on unbreachable floors. All waste pipework is above floor, underneath the tray edges. Ideal for multi storey residential developments.
- New slip resistant satin surface, tested in accordance with DIN 51097:1992 Class "B", classified as high slip safety.
- End waste drain position with unique water channelling tread pattern maintaining an 11 Litres per minute flow rate capacity.
- Large specially acoustically tuned quiet
 90 mm waste supplied.
- Ideally suited for use with electric showers with Whale shower waste pumps








TEL 01886 830119 www.practicalcareproducts.com

Radiate Range Size Options

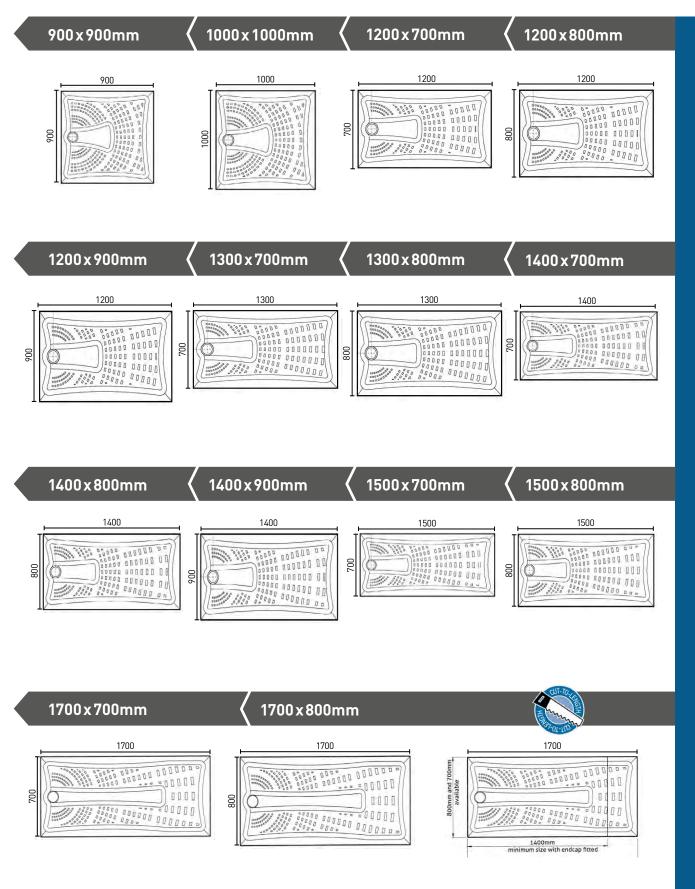

When measuring & cutting the tray please allow for the end cap to be fitted - see illustration

Mantis Range

Low Level Shower trays



Key features

- The lowest profile shower tray on the market – only 24 mm
- Surface mounted or recessed into floor giving true level access at installation
- New slip resistant satin surface, tested and qualified in accordance with DIN 51097 Class "B", classified as high slip safety
- End waste drain position while maintaining a 11 Litres per minute flow rate capacity
- Large 90 mm waste supplied
- Ideally suited for use with electric showers
- Easy clean surface
- Tiling waterproof membrane upstand supplied with every tray giving seamless join between tray & wall tiles

Only 24 mm high




Self adhesive Tiling upstand supplied with every tray.

Large 90 mm horizontal waste supplied with every tray (vertical waste option also available)

```
SHOWER TRAYS
```

Mantis Range Size Options

1400mm minimum size with endcap fitted 1700mm

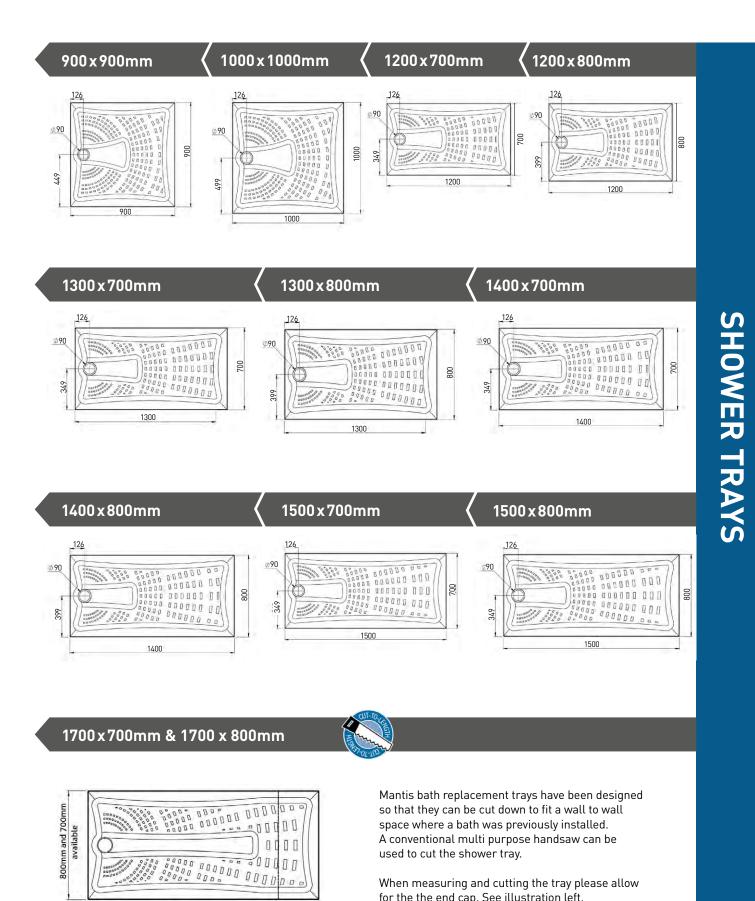

When measuring and cutting the tray please allow for the the end cap. See illustration left.


41

Hinged Door Design

Rise Slider Door Design

Portable Folding Screens





Glass & Chrome Half Height Hinged Door Design

Glass & Chrome Full Height Hinged Doors and Panels Our half height hinged doors are available in a wide range of configurations to suit any showering need. Each set includes a curtain rail and weighted shower curtain. Our doors are manufactured here in the UK.

Our half height Rise Slider doors offer an alternative to the hinged version. There are 7 configurations to choose from which include a curtain rail and weighted shower curtain as standard. These doors are manufactured here in the UK.

When fixed screens are not appropriate, we offer a range of Portable Folding screens. Available in 4 sizes and manufactured here in the UK.

Stylish folding screens with glass panels. Half height doors are available to suit a wide range of configurations. Each set includes a polished curtain rail and weighted shower curtain.

Full height Elegance folding glass doors and fixed panel glass screens to suit wet floor showers and shower trays.

Standard Hinged Door Design



- 180° hinge, rise and fall with 10mm lift
- Wall compensator adjustment of up to 20mm
- High visibility handles available on request
- Tough, robust Polycarbonate panels
- All panels 750mm high for carer assistance

OPTION C Left or Right handed



Fixed half height panel, 750mm wide, floor to ceiling pole, curtain rail and full length curtain. Suitable for Corner or Alcove installation

Suits Blackdown, Radiate, Mendip, Level-Dec & Wet Floor showers

OPTION E Left or Right handed



Two fixed half height panels, one 400mm wide on long side, two floor to ceiling poles with one half height door hung from each, and one half height fixed panel on short side. L-shaped curtain rail and full length curtain.

Suitable for Corner installation Suits Blackdown, Radiate, Mendip, Level-Dec & Wet Floor showers

OPTION G Not handed



Two half height bi-folding doors between walls, meeting at the centre. Straight curtain rail and full length curtain. Suitable for Alcove installation

Suits Blackdown, Radiate, Mendip, Level-Dec & Wet Floor showers

OPTION J Left or Right handed



One half height bi-folding door on long side and one single door on short side, meeting on corner. L-shaped curtain rail and full length curtain. Suitable for Corner installation

Suits Blackdown, Radiate, Mendip, Level-Dec & Wet Floor showers



Two single half height bi-parting doors between walls, meeting at the centre. Straight curtain rail and full length curtain. Suitable for Alcove installation

Suits Blackdown, Radiate, Mendip, Level-Dec & Wet Floor showers

Left hand version illustrated unless otherwise specified. Please note: U-rails are optional on all units and need to be specified on order.

- Strong, rigid and lightweight powder coated aluminium frames
- Mini spirit level with every wall compensator to guarantee vertical accuracy
- L-shaped or straight curtain rails available as standard

OPTION D Left or Right handed



Two fixed half height panels, one 400mm wide on long side, two floor to ceiling poles with one half height door hung from each, and one half height fixed panel on short side. L-shaped curtain rail and full length curtain. Suitable for Corner installation

Suits Blackdown, Radiate, Mendip, Level-Dec & Wet Floor showers

OPTION F Left or Right handed Not handed on square installations

Two fixed half height panels 400mm wide adjacent to each wall, two floor to ceiling poles with two half height doors, each hung from one floor to ceiling pole, meeting on corner. L-shaped curtain rail and full length curtain. Suitable for Corner installation

Suits Blackdown, Radiate, Mendip, Level-Dec & Wet Floor showers

OPTION H Left or Right handed Not handed on square installations

length curtain.



Suits Blackdown, Radiate, Mendip,

Two half height bi-folding doors meeting

on corner. L-shaped curtain rail and full

Level-Dec & Wet Floor showers

Suitable for Corner installation

OPTION K Not handed

SHOWER DOORS & SCREENS

TEL 01886 830119 www.practicalcareproducts.com

Standard Hinged Door Design

OPTION M Left or Right handed



One half height fixed panel 400 mm wide, one floor to ceiling pole, with one bi-folding door hinged from wall meeting at floor to ceiling pole at the centre. Straight curtain rail and full length curtain.

Suitable for Alcove installation Suits Blackdown, Radiate, Mendip, Level-Dec & Wet Floor showers

OPTION P Left or Right handed Not handed on square installations



Two single half height bi-parting doors meeting on the corner. L-shaped curtain rail and full length curtain. Suitable for Corner installation

Suits Blackdown, Radiate, Mendip, Level-Dec & Wet Floor showers

OPTION S Left or Right handed



One half height bi-folding door hinged at one end between walls. Straight curtain rail and full length curtain. Suitable for Alcove installation

Suits Blackdown, Radiate, Mendip, Level-Dec & Wet Floor showers

OPTION V Left or Right handed



One half height tri-folding door hinged off wall on long side and one bi-folding half height door hinged off other wall meeting on corner. L-shaped curtain rail and full length curtain. Suitable for Corner installation

Suits Blackdown, Radiate, Mendip, Level-Dec & Wet Floor showers

OPTION X Left or Right handed



One half height fixed panel on short side, floor to ceiling pole on corner, with two single half height doors on long side meeting in the centre. L-shaped curtain rail and full length curtain. Suitable for Corner installation

Suits Blackdown, Radiate, Mendip, Level-Dec & Wet Floor showers

OPTION N Left or Right handed



One fixed half height panel 400mm wide on long side, one floor to ceiling pole with half height tri-fold doors hung from the wall, meeting at floor to ceiling pole on long side. L-shaped curtain rail and full length curtain.

Suitable for Corner installation

Suits Blackdown, Radiate, Mendip, Level-Dec & Wet Floor showers

🕻 OPTION R Left or Right handed



One fixed half height panel 400mm wide on long side, one floor to ceiling pole with half height bi-fold doors hung from the wall, meeting at floor to ceiling pole on long side. L-shaped curtain rail and full length curtain.

Suits Blackdown, Radiate, Mendip, Level-Dec & Wet Floor showers

OPTION T Left or Right handed



One half height bi-folding door hinged at one end and one single half height door hinged at opposite end between walls. Straight curtain rail and full length curtain.

Suitable for Alcove installation

Suits Blackdown, Radiate, Mendip, Level-Dec & Wet Floor showers


OPTION W Left or Right handed



One half height tri-folding door hinged at one end between walls. Straight curtain rail and full length curtain. Suitable for Alcove installation

Suits Blackdown, Radiate, Mendip, Level-Dec & Wet Floor showers

DOOR HANDLING CONFIGURATION



Rise Slider Door

- Sliding door design with 180° hinge at compensator, rise & fall with 10mm lift
- Wall compensator with up to 20 mm adjustment
- Mini spirit level with every wall compensator to guarantee vertical accuracy
- L-shaped or straight curtain rails available as standard
- High visibility handles available on request
- Tough, robust Polycarbonate panels
- Strong, rigid & lightweight powder coated aluminium frames
- All panels 750mm high for carer assistance

Left hand version illustrated unless otherwise specified

OPTION 2 Left or Right handed



Two half height sliding doors hinged at walls, meeting on corner. L-shaped curtain rail and full length curtain. Suitable for Corner installation

Suits Blackdown, Radiate (made to order), Mendip, Level-Dec & Wet Floor showers

OPTION 3 Left or Right handed



One half height fixed panel 400 mm wide, one floor to ceiling pole, with one set of sliding doors hinged from wall meeting floor to ceiling pole at the centre. Straight curtain rail and full length curtain. Suitable for Alcove installation

Suits Blackdown, Radiate, Mendip, Level-Dec & Wet Floor showers

OPTION 5 Left or Right handed



One half height fixed panel 400 mm wide, one floor to ceiling pole, with one set of sliding doors hinged from floor to ceiling pole latching at opposite wall. Straight curtain rail and full length curtain. Suitable for Alcove installation

Suits Blackdown, Radiate, Mendip, Level-Dec & Wet Floor showers

OPTION 7 Left or Right handed



One half height fixed panel 400 mm wide on long side, two floor to ceiling poles, with one set of sliding doors hinged from floor to ceiling pole and one half height fixed panel on short side between wall and second floor to ceiling pole. L-shaped curtain rail and full length curtain. Suitable for Corner installation

Suits Blackdown, Radiate, (made to order), Mendip, Level-Dec & Wet Floor showers



One set of sliding doors hinged on one wall, latch on opposite wall, between walls. Straight curtain rail and full length curtain. Maximum 1500mm width. Suitable for Alcove installation

Suits Blackdown, Radiate, Mendip, Level-Dec & Wet Floor showers

OPTION 4 Not handed



Two half height sliding doors hinged at walls, meeting at centre. Straight curtain rail and full length curtain. Suitable for Alcove installation

Suits Blackdown, Radiate, Mendip, Level-Dec & Wet Floor showers

OPTION 6 Left or Right handed



One half height fixed panel 400 mm wide, one floor to ceiling pole, with one set of sliding doors hinged from floor to ceiling pole and one set of sliding doors hinged from wall, meeting on corner. L-shaped curtain rail and full length curtain. Suitable for Corner installation

Suits Blackdown, Radiate (made to order), Mendip, Level-Dec & Wet Floor showers

Air Assisted doors available on options 1 to 7





Air Assisted "Freedom Doors"

Shower doors that you can open and close at a touch

The rubber seal on the base of a conventional shower door can prevent smooth opening and closing, unless the door is manually lifted clear of the floor and this can be difficult for some users, especially those in a wheelchair.

The unique Freedom air assisted hinge is operated by a small lever that lifts the door clear of the floor, enabling it to be opened and closed at a touch. Once closed, a gentle push down secures the door in place and provides the most watertight seal.

The doors can also be secured when open to ensure that they cannot swing back whilst someone is entering the shower area.

Air Assisted "Fre	edon	n Doo	ors"	avail	lable	on	
Hinged Doors	D	Е	G	Н	J	М	
Sliding Doors	1	2	3	4	5	6	7



Water seals on conventional shower doors can make it difficult to open if they are not lifted clear of the floor.



With the Freedom door you simply press a lever to raise the door off the floor.



The rubber floor seals also have a unique profile and end insert to ensure the most watertight seal possible.



A quick press on the hand grip returns the door to the floor and secures it in position.



The heart of the Freedom door is the spring mechanism, which is identical to those used successfully for many years as a support for the tailgate in hatchback cars -the utmost proof of its long lasting durability. It is completely maintenance free and covered by a lifetime guarantee.

The spring mechanism used has been tested for over 40,000 operations without failure.

Portable Folding Screens




PORTABLE FOLDING SCREENS

PFS1, PFS2, PFS3



PFS4



Lightweight and very strong with tough frames and robust Polycarbonate panels. For use on trays and wet floors. Supplied with handles.

Produc	t Ref Dimensions
PFS1	750h x 650 x 650
PFS2	750h x 750 x 750
PFS3	750h x 1000 x 1000
PFS4	750h x 400 x 225 x 225 x 400



Glass and chrome half height hinged door

INFILL POSTS AND SERVICE DUCTING

Service Ducting

Used to hide pipework, sink wastes etc behind panels constructed of heavy duty GRP instead of chasing out floors and walls. Versions of the ducting is available for use with the Blackdown, Slimline, Mantis & Radiate shower tray ranges.


These lengths can be cut to size on site. The top edge is a tiling lip and the bottom flange is screwed down with self tapping screws and then siliconed to the tray.

Infil Posts

Used in conjunction with screen sets & Service Ducting, the infil post is located on top of the Service Ducting and fills the space created by the ducting above the height of the ducting itself.

SDUCT2400 2.4 Metres long 70mm

INFPOST



SHOWER DOORS & SCREENS

Glass Screens



Having specialist needs should not mean compromising on style. We offer a beautifully designed and stylish range of full height and half height glass screens to suit all needs.

HALF HEIGHT SCREENS FOR VINYL AND TILED WET FLOORS AND SHOWER TRAYS

These half height enclosures are designed to ensure a safe and stylish showering experience with the provision for carer assistance if needed.



Features

- Stylish polished aluminium design
- 800 mm high
- Extensively tested to meet the requirements of Construction Products Regulation (EU) No 305/2011 (CPR) in durablity, impact resistance and cleanablity
- Incorporating plastics with accredited lifetime antibacterial properties
- Toughened 4mm stay clean glass that conforms to BS EN 12600:2002 for impacy test method and classification
- Easy grip handle
- Rise & fall wall hinge allows easy access to shower area

Size options H	alf heig	ht, Glass	and Chr	ome								
Alcove installa	tion	800	900	10	000	1200	1300	1400	1500	1600	170	0
G						~	v	~	~	~	~	
К		~	~	~		~						
S		~	~	~		~						
Size options H	alf heig	ht, Glass	and Chr	ome								
Corner installation	800 x800	900 x900	1000 x1000	1200 x700	1200 x900	1200 x1200	1300 x700	1300 x800	1400 x700	1400 x900	1500 x800	1700 x750
D				~	~	~	~	~	~	~	v	~
E				✓	~	~	✓	~	~	~	~	~
н	v	~	~	~	~	~						
J	~	~	~	~	•	~						
Х	v	~	~	v	~	~	✓	~	~	~	v	~

For details of design options see pages 44 and 45

Full Height Glass Elegance Doors

Suitable for tiled floor, vinyl floor or shower tray



Features

- High quality 6 mm toughened glass
- Screen 1900 mm high
- Magnetic closure
- Choice of button or easy grip handle


These stylish UK made full height doors offer barrier free access as well as being suitable for the whole family. If showering assistance is required they also have the flexibility of easy access for the user and a carer



- Durable bottom seals with water deflection flippers
- Wall compensators allow adjustment of +15/-24mm



Full Height Glass Elegance Doors

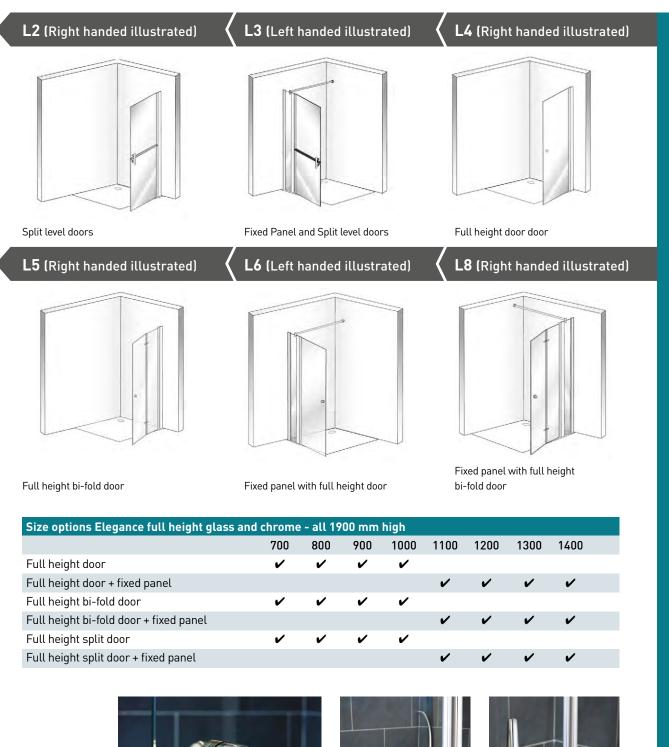

This button handle comes as standard with all door options except the full height split doors which come with the large Easy Grip handle. This East Grip handle can be supplied as an optional extra on all door designs.





"Pure" Range



Features

- Superb selection of glass panels fixed with slimline tubes and highly engineered brackets
- Option of etched modesty panels or full satin finished glass
- Made from 8 mm toughened glass
- Glassguard protected
- Fully reversible for left or right hand installations
- 2000 mm in height
- Designed and built in Britain

Fixed Panels (main and/or end panels)

ixeu Fallet	s (main anu/or end	i pallets)	
Size	Plain Glass	Satin Glass	Modesty Glass
700mm	SDPURE700	SDPURES700	SDPUREM700
800mm	SDPURE800	SDPURES800	SDPUREM800
900mm	SDPURE900	SDPURES900	SDPUREM900
1000 mm	SDPURE1000	SDPURES1000	SDPUREM1000
1200 mm	SDPURE1200	SDPURES1200	SDPUREM1200
Return Pan	el (optional, for use	e with fixed panel)	
200mm	SDPURERP	SDPURESRP	SDPUREMRP





Chrome foot for return panel.

Modesty Panel

Satin Glass Panel

extra. Please specify when ordering.

Fully opaque etched satin glass or etched modesty panels are available as an optional



Angled brace fixing.



Alternative ceiling brace fixing.

SDPUREFLSEALA

Acrylic Seal


SDPUREFLSEAL



Chrome Seal

These glass screens can be simply silicone sealed direct to the floor, but for the neatest possible finish we also offer two a Iterative options - a discrete acrylic seal, or a stylish polished chrome trim.

Each type of seal is supplied as a 1200 mm length which can be cut to required length at installation.



SDPURECOVED

If the glass screen is to be fitted on a vinyl floor, you will require a chrome finish wall bracket to allow for the coved edging.

TEL 01886 830119 www.practicalcareproducts.com

"Stylus" Range



Features

- Superb selection of glass panels fixed with slimline tubes and highly engineered brackets
- Option of etched modesty panels or full satin finished glass
- Made from 8 mm toughened glass
- Glassguard protected
- Fully reversible for left or right hand installations
- 2000 mm in height
- Designed and built in Britain





1000mm	SDSTYLUS1000	SDSTYLUSSP1000	SDSTYLUSMP1000
1200mm	SDSTYLUS1200	SDSTYLUSSP1200	SDSTYLUSMP1200
Fixed End F	anel (for use with co	orner installation)	
700mm	SDSTYLUS700	SDSTYLUSSP700	SDSTYLUSMP700
Return Pan	el (optional, for use	with fixed panel)	
200 mm	SDSTYLUSRP	SDSTYLUSSPRP	SDSTYLUSMPRP



Modesty Panel

Satin Glass Panel

Fully opaque etched satin glass or etched modesty panels are available as an optional extra.

Please specify when ordering.



SDSTYLUSAT

Acrylic Seal

くSDSTYLUSPCT



: Seal

Chrome Seal

These glass screens can be simply silicone sealed direct to the floor, but for the neatest possible finish we also offer two alternative options - a discrete acrylic seal, or a stylish polished chrome trim.

Each type of seal is supplied as a 1200 mm length which can be cut to required length at installation.

"Premier" Frameless Range



Features

- Minimal style of a wetroom panel with added screening of a fully enclosed shower area
- All enclosures are 2000 mm in height
- Made from 8 mm toughened glass
- Glassguard protected

- Suitable for installation with a shower tray or a tiled floor
- Each door features beautifully designed chrome hinges for smooth, silent operation
- Designed and built in Britain

Hinged

The Premier Frameless hinged range feature a fixed panel with a hinged frameless glass door and are available either left or right hand opening, with matching side panels for corner entry.



Fixed Panel	l + Hinged Door for alcove
Size	Code
800mm	SDPREMH800LH/RH
900mm	SDPREMH900LH/RH
1000 mm	SDPREMH1000LH/RH
1200 mm	SDPREM H1200LH/RH
Side Panel	for Corner Installation
800mm	SDPREM800SP
900mm	SDPREM900SP



Sliding

The Premier Frameless sliding range feature a fixed glass panel with a frameless glass door supported on easy-glide rollers and are available with either left or right hand opening, with a matching side panel for corner installations.



Fixed Panel + Sliding Door for Alcove

Fixed Panel	+ Sliding Door for Alcove
Size	Code
1200 mm	SDPREMS1200LH/RH
Side Panel f	or Corner Installation
800mm	SDPREM800SP
900mm	SDPREM900SP





"Supreme" Range



Features

- A luxurious appearance also providing practical support and ease of entry to shower
- The 8 mm safety glass panels are 2000 mm in height
- Available in 5 widths and 3 glass finishes
- Supported by a polished aluminium column, which can be ceiling fixed or wall braced
- Secured to the floor with an innovative new fitting that requires no screws and can be easily removed



Ceiling fixed Option

Supreme Glass Shower Panels -Floor to Ceiling

Supreme		r toor to certify	
Size	Plain	Modesty	Satin
700mm	SDSUPREME700	SDSUPREME700M	SDSUPREME700S
800mm	SDSUPREME800	SDSUPREME800M	SDSUPREME800S
900mm	SDSUPREME900	SDSUPREME900M	SDSUPREME900S
1000mm	SDSUPREME1000	SDSUPREME1000M	SDSUPREME1000S
1200mm	SDSUPREME1200	SDSUPREME1200M	SDSUPREME1200S

Modesty panel Option

Satin Glass Panel Option

Supreme Glass Shower Panels -Wall Braced

Size	Plain	Modesty	Satin
700mm	SDSUPREMEW700	SDSUPREMEW700M	SDSUPREMEW700S
800mm	SDSUPREMEW800	SDSUPREMEW800M	SDSUPREMEW800S
900mm	SDSUPREMEW900	SDSUPREMEW900M	SDSUPREMEW900S
1000mm	SDSUPREMEW1000	SDSUPREMEW1000M	SDSUPREMEW1000S
1200mm	SDSUPREMEW1200	SDSUPREMEW1200M	SDSUPREMEW1200S

For areas where a coved vinyl floor has been installed you will need to order a coving extension profile. Code: SDSUPREMECOVED





Wall Braced Option

For the wall braced screen option, we offer a range of shower curtains. All curtain options are 2000 mm drop and come complete with curtain rings.

Size	Code
11200 mm wide	SSC2000x1200
1500 mm wide	SSC2000x1500
1800 mm wide	SSC2000x180



Impress Cubicle

.

11

Snowdon Cubicle

Snowdon Shower Toilet Cubicle

Where a full bathroom adaptation is not appropriate the Impress Shower Cubicle offers an easy solution. The 2 sided enclosure allows maximum entry into the shower area, yet is fully enclosed when the doors and full length curtain are used.

The Snowdon Shower Cubicle is a 3 sided enclosure designed to fit into enclosed spaces which may not allow side entry.

When major adaptation work to an existing bathroom is not possible the Snowdon Shower Toilet Cubicle offers a cost effective solution. Perfect for temporary or ground floor applications, this offers an entire bathroom package allowing those with limited mobility independence at home.

Impress Cubicle

WARRANTA . WARRANTA .

Our cubicles have been designed with maximum access in mind, so we have created a cubicle that is open on two sides, yet the shower area can be fully enclosed using the doors & full length shower curtain provided.

They are suitable for wheelchair access or for those who have limited mobility. Although the cubicle only has two fixed sides it is still very sturdy and because the wall panels are solid it is also very robust. The cubicles come with either Option H or J doors depending on your needs.

What's included

- Blackdown, Slimline and Mendip shower tray
- Shower waste trap
- Two TRESPA panels
- Half height shower doors
- Corner curtain rail
- CIBA anti-bacterial curtain
- Grab rail

Optional extras


- Glazed roof panel
- Extractor fan/light
- Access ramp see page 33, 34 & 37




Electric shower not included




Installation instructions available on our website. www.practicalcareproducts.com/downloads

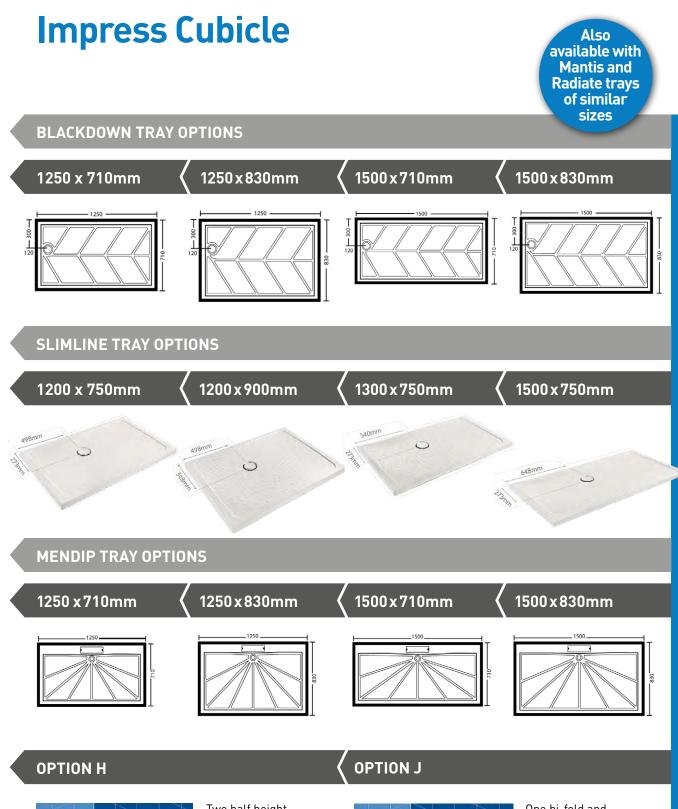



Two half height bi-folds meeting on the corner, L-shaped curtain rail and curtain.

Left hand doors illustrated



One bi-fold and single door meeting on the corner, L-shaped curtain rail and curtain.

Left hand doors illustrated

SHOWER CUBICLES

Snowdon Cubicle



The Snowdon cubicles have been designed to fit into enclosed spaces which may not be suitable for side opening doors as found in the Impress range. For this reason the cubicles have fixed panels on 3 sides and the doors open to the front.

Again, solid panels and a tough construction ensure that the cubicle is robust and will give trouble free service. The cubicles come with Option K doors and a full length shower curtain.

Note: The Snowdon cubicles are also available with the option of a half glazed side panel, which allows more light into the shower area.

What's included

- Blackdown, Slimline and Mendip shower tray
- Shower waste trap
- Three TRESPA panels
- Half height shower doors
- CIBA anti-bacterial curtain
- Grab rail

Optional extras


- Glazed roof panel
- Extractor fan/light
- Access ramp see pages 33, 34 & 37



Electric shower not included



Installation instructions available on our website. www.practicalcareproducts.com/downloads

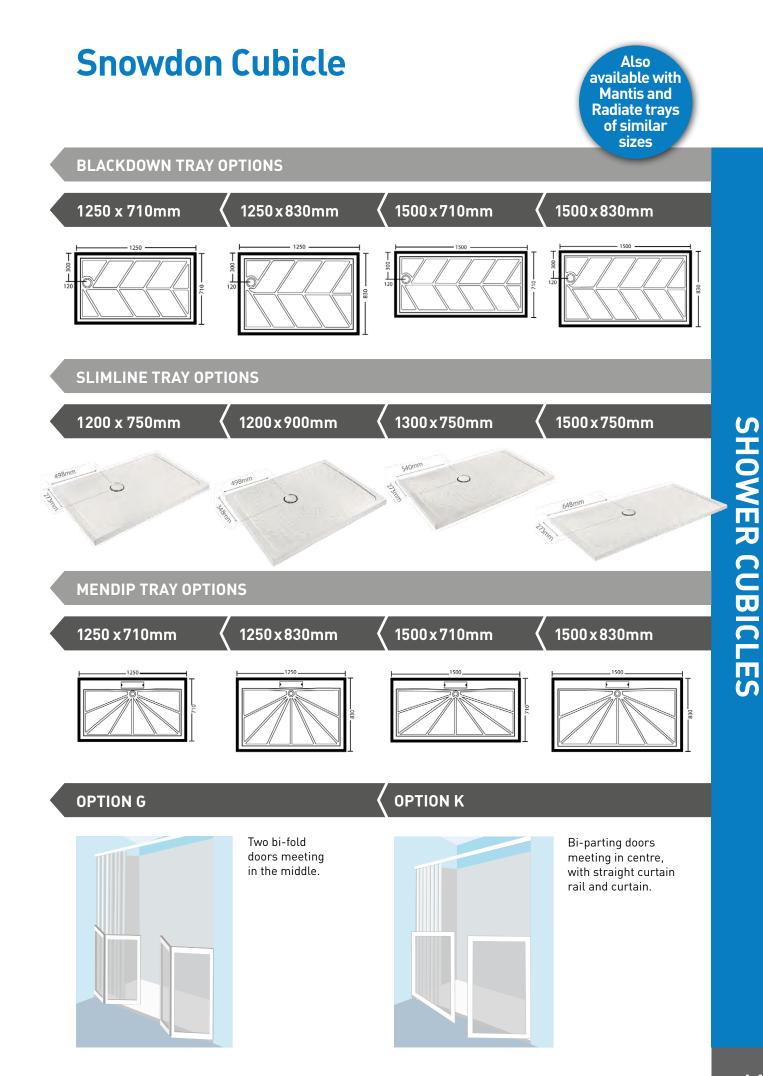

Snowdon Shower Toilet Cubicle



A complete solution for those who are limited for space, the Snowdon Shower Toilet cubicles offer an entire bathroom package in an area as small as 1550mm x 710mm!

The cubicles include a wall hung WC, wash hand basin and grab support rail for all your bathroom needs, and when combined with a shower unit the cubicle becomes a complete bathroom that can be installed anywhere in the home. It is perfect for those who have limited mobility but want to remain living in their own homes without the fuss or cost of expensive permanent adaptations.

What's included


- Blackdown, Slimline and Mendip shower tray
- Three TRESPA panels
- Option K doors
- Wall hung WC and supporting framework
- Concealed cistern
- Wash hand basin and lever taps
- Inspection panel to access cistern (350mm wide)
- CIBA anti-bacterial curtain
- Grab rail
- Height excluding tray 1850mm

Optional extras

- Glazed roof panel
- Extractor fan/light
- Access ramp see pages 33, 34 & 37

Electric shower not included


In order to securely fix a WC to the wall of the cubicle it is necessary to have a toilet support frame and cistern mounted on the outside of the cubicle that adds approximately 400mm to the overall length of the cubicle. The frame and cistern are enclosed with an inspection panel to maintain a less intrusive look.



TEL 01886 830119 www.practicalcareproducts.com

Snowdon Shower Toilet Cubicle

Also available with Mantis and Radiate trays of similar sizes

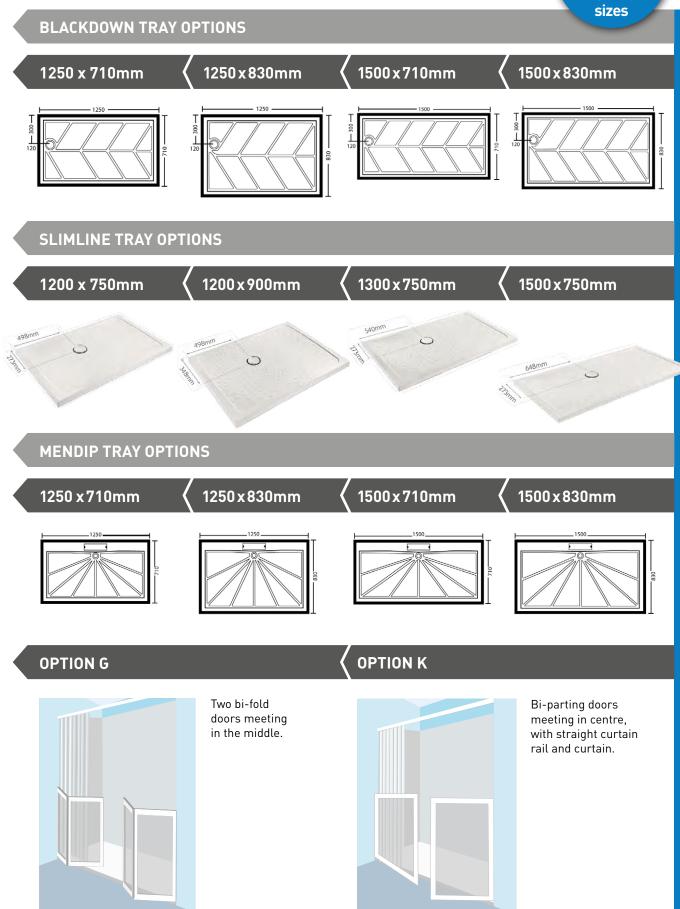

Mira Advance ATL Flex 9kW

Thermostatically controlled shower range





Thermostatic Electric Shower with flex lever, standard control & flex fittings.

- Controlled shutdown flushes water from the shower to minimise any unexpected temperature change if guickly re-started
- Safe showering with precise thermostatic control maintains water temperature to within +/- 1°C
- Large colour contrasting lever for easy grip & operation
- Raised push button controls for ease of use
- ATL Adjustable temperature Limit for added safety
- Smooth glide bar with easy glide operation, wall or corner mounted
- 2 year guarantee

Thermostatic Electric Shower with flex lever, standard control & flex fittings.

- Manufactured to work with Whale Instant Match waste water pump without the need to fit a flow switch.
- Automatic pump operation maintained by direct wire feed from pump transformer directly into shower unit.
- Controlled shutdown flushes water from the shower to minimise any unexpected temperature change if quickly re-started
- Safe showering with precise thermostatic control maintains water temperature to within +/- 1°C
- Large colour contrasting lever for easy grip & operation
- Raised push button controls for ease of use
- ATL Adjustable temperature Limit for added safety
- Smooth glide bar with easy glide operation, wall or corner mounted
- 2 year guarantee





RNIB

Mira Advance ATL Flex Extra Wireless 9kW



Mira Advance ATL Flex Extra Wireless 9kW for Wireless connection between shower & pump

Operates with the Instant Match Wireless pump. The transformer includes patented Active Link diagnostics:

- Test button power indication
- Flashing Active Link signal showing wireless communication between shower unit and pump.
- Controlled shutdown flushes water from the shower to minimise any unexpected temperature change if quickly re-started
- Safe showering with precise thermostatic control maintains water temperature to within +/- 1°C
- Large colour contrasting lever for easy grip & operation
- Raised push button controls for ease of use
- ATL Adjustable temperature Limit for added safety
- Smooth glide bar with easy glide operation, wall or corner mounted BEAB CARE RNIB
- 2 year guarantee

Mira Advance ATL Flex Low Pressure 9kW



Thermostatic Electric Shower for use when water pressure is low

- Pumped electric shower the ideal choice sites with low water pressure - min 0.008 bar
- Separate flow and temperature controls with push button start/stop and audible beeps
- Thermostatic temperature control for added safety
- Four spray pattern showerhead with rub clean rubber nozzles for easy cleaning
- Extended riser rail (1m) with easy one-handed adjustment of the height of the shower head, plus additional parking socket
- Best in class limescale resistance
- Guaranteed for 2 years, with optional 3 year extended warranty



www.practicalcareproducts.com TEL 01886 830119

Triton Safeguard Plus 8.5kW also available in 9.5kW version

Thermostatic electric shower with extended riser rail & 2 metre hose.

- Phased shutdown flushes water from the shower to minimise any unexpected temperature change if quickly re-started
- Safe showering with thermostatic control
- Large colour contrasting lever for easy grip & operation
- Large colour contrasting push button Start/Stop for ease of use
- Adjustable maximum temperature limit set between 38°C & 47°C for added safety
- "Power On" indicator
- "Low pressure" indicator operates when operating water pressure is too low
- Audible feature alert when shower is started and stopped
- Second fixed handset holder for extra convenience
- 2 Year Guarantee
- Also available with hardwired remote control Stop / Start button

Triton Safeguard Plus Grab also available in 9.5kW version

BEAB CARE



All the flexibility of the Safeguard Plus shower but with the added feature of a heavy duty riser rail that also acts as a grab rail.



Remote control (optional extra).





BATHROOM ACCESSORIES

Where water pressure is low or unreliable, choose the tank-fed Safeguard Pumped Care for installation on a cold water cistern gravity system.

Triton Safeguard Pumped 8.5kW



Redring Selectronic Premier Plus 8.5 kW also available in 9.5kW & 10.5kW versions



- Thermostatic temperature control for safe showering
- 1 metre chrome riser rail with adjustable handset holder and soap dish
- 2 metre chrome shower hose
- "Lock Mode" with three optional settings ensures water temperature remains within safe range
- Audible feedback response to Push-Button operation
- Large one touch, easy to press button operation
- Large LED temperature readout display
- Phased shutdown reducing scale and ensuring cool-start for next user
- Automatic shutdown after 30 minutes of inactivity
- RNIB endorsed
- 3 year guarantee



Redring Selectronic Premier Plus Remote

Offers all the features of the Selectronic Premier Plus, but with the following additions;

- A wireless remote on/off control
- Battery operated to within 10 metres
- Retro fixable to an existing Selectronic Premier unit in the future







1L

Mira Coda Pro

Thermostatic mixer shower with riser rail and fixings

- Exposed valve with bar valve fixing kit
- Thermostatic temperature control for safe showering
- Maximum temperature stop for added safety – option to override this if hotter shower preferred
- Separate temperature and flow controls
- Three spray showerhead with rub-clean rubber nozzle for easy cleaning
- Clean chrome finish
- 5 year guarantee

Mira Miniduo (EV & BIV)

Thermostatic mixer shower with riser rail and fixings

- Available as an exposed (EV) or built in (BIV) valve with adjustable fittings
- Mini size, maximum performance
- Thermostatic temperature control for safe showering
- Separate temperature and flow controls
- Can be fitted to falling, rising or rear water supply
- Four spray showerhead with partial rub-clean rubber nozzle for easy cleaning
- Clean chrome finish
- TMV2 approved
- 5 year guarantee

Mira Select Flex

Thermostatic mixer shower with extended hose, riser rail and fixings

- Exposed valve with adjustable fittings
- Thermostatic temperature control for safe showering
- Separate temperature and flow controls
- 'Cool touch' technology prevents valve becoming hot whilst in use
- Maximum temperature stop for added safety
- Smooth glide bar with easy glide operation, wall or corner mounted
- 2m hose and 1m slide bar for added flexibility
- Extra separate showerhead holder for more convenience
- Clean chrome finish
- TMV2 and TMV3 approved
- 5 year guarantee

Mira Excel (EV & BIV)

Thermostatic mixer shower with riser rail and fixings

• Available as an exposed (EV) or built in (BIV) valve with adjustable fittings

BIV

- Thermostatic temperature control for safe showering
- Maximum temperature stop for added safety – option to override this if hotter shower preferred
- Separate temperature and flow controls
- Ceramic flow control keeps lime scale at bay
- Excellent performance on any water system, even low pressure
- Four spray showerhead with rub-clean rubber nozzle for easy cleaning

BIV

- Clean chrome finish
- 5 year guarantee



Triton Elina TMV3 Concentric (EV & BIV)

Thermostatic mixer shower

- Available as an exposed (EV) or built in (BIV) valve
- Thermostatic temperature control for safe showering
- Factory set maximum temperature at 38°C
- Separate flow and temperature controls
- Tamper proof lever controls
- Automatic shutdown if hot or cold water supplies fail
- Flow limiters supplied, 12 L/Min flow rate
- Clean chrome finish
- TMV3 approved
- 3 year guarantee

CHEN.

Triton Elina Bar



- Thermostatic temperature control for safe showering
- Factory set maximum temperature at 38°C
- Separate flow and temperature controls
- Tamper proof lever controls
- Automatic shutdown if hot or cold water supplies fail
- Flow limiters supplied, 12 L/Min flow rate
- Clean chrome finish
- TMV3 approved
- 3 year guarantee




Triton Shower Head holder



Separate shower head holder can be supplied for mounting on wall below a standard height shower. This enables a seated user to have have easy access to the shower without assistance.

Mira Special Needs Fittings Kit

- Suitable for any shower
- 940mm long riser rail
- Rubberised push button clamp bracket allows easy height adjustment even when wet
- Gel hook/hose tidy
- 2m reinforced chrome/ plastic hose
- Includes wall fixings
- White/chrome



- Suitable for any shower
- 940 mm riser rail
- Clamp bracket allows easy height adjustment
- Includes 7000 series showerhead
- 2m reinforced hose, chrome
- Includes wall fixings
- Hose tidy and soap dish
- Chrome/grey or chrome/ white

Shower Curtains

All our shower curtains are specifically manufactured to suit a level or easy access shower when the user may have particular needs.


- Textile material which is breathable thereby reducing any potential suffocation risk.
- Material is treated with an anti-bacterial agent during manufacture.
- Machine washable if necessary.
- Weighted hem to help water retention and reduce curtain suction.
- Standard colour is white.

SHOWER CURTAIN STANDARD SIZES

Product Ref	Dimensions
SC1200 X 1200	1200 Drop x 1200 Wide
SC1250 X 1800	1250 Drop x 1800 Wide
SC1800 X 1800	1800 Drop x 1800 Wide
SC1800 X 2000	1800 Drop x 2000 Wide
SC1800 X 2200	1800 Drop x 2200 Wide
SC1800 X 2400	1800 Drop x 2400 Wide
SC2000 X 1800	2000 Drop x 1800 Wide
SC2000 X 2000	2000 Drop x 2000 Wide
SC2000 X 2200	2000 Drop x 2200 Wide
SC2000 X 2400	2000 Drop x 2400 Wide
SC2200 X 2200	2200 Drop x 2200 Wide
SC2400 X 1800	2400 Drop x 1800 Wide

CAPTIVE CURTAIN SYSTEM

If you want to secure your curtain to the wall while the shower is being used, we suggest that you try our Captive Curtain System. The curtain is held in place by a wall mounted roller mechanism. It is particularly useful stopping splashing around the side of the curtain during showering if there is curtain suction.







Curtain Rails


All shower curtain rails are manufactured in Aluminium which is then powder coated white. The Aluminium is extruded to a heavy duty design which will resist accidental bending. All rails are supplied with a standard fixing pack (wall brackets & fixings, curtain glides and a track gasket).


CRU860 x 860 x 860 860 x 86 CRU950 x 950 x 950 950 x 95 CRU 1000 x 1000 x 1000 1000 x 1 CRU1150 x 1150 x 1150 1150 x 1		CR900 x 900 CR1200 x 1200 CR1300 x 900 CR1500 x 900 CR1500 x 1200 CR1800 x 900	900 x 900 mm 1200 x 1200 mm 1300 x 900 mm 1500 x 900 mm 1500 x 1200 mm 1800 x 900 mm
CR2000 2000 mm long CR2500 2500 mm long L-SHAPED (All supplied with 1 cd U-SHAPED (All supplied with 2 cd CRU810 x 740 x 810 SHAPED (All supplied with 2 cd CRU860 x 860 x 860 CRU950 x 950 x 950 CRU 1000 x 1000 x 1000 CRU1150 x 1150	eiling rods & 40 x 810 mm 50 x 860 mm 50 x 950 mm 1000 x 1000 mm	CR900 x 900 CR1200 x 1200 CR1300 x 900 CR1500 x 900 CR1500 x 1200 CR1800 x 900	1200 x 1200 mm 1300 x 900 mm 1500 x 900 mm 1500 x 1200 mm 1800 x 900 mm
CR2000 2000 mm long CR2500 2500 mm long L-SHAPED (All supplied with 1 cd U-SHAPED (All supplied with 2 cd CRU810 x 740 x 810 SHAPED (All supplied with 2 cd CRU860 x 860 x 860 CRU950 x 950 x 950 CRU 1000 x 1000 x 1000 CRU1150 x 1150	eiling rods & 40 x 810 mm 50 x 860 mm 50 x 950 mm 1000 x 1000 mm	CR900 x 900 CR1200 x 1200 CR1300 x 900 CR1500 x 900 CR1500 x 1200 CR1800 x 900	1200 x 1200 mm 1300 x 900 mm 1500 x 900 mm 1500 x 1200 mm 1800 x 900 mm
CR2500 2500 mm long L-SHAPED (All supplied with 1 cd U-SHAPED (All supplied with 2 cd CRU810 x 740 x 810 SHAPED (All supplied with 2 cd CRU860 x 860 x 860 CRU950 x 950 x 950 CRU 1000 x 1000 CRU1150 x 1150	eiling rods & 40 x 810 mm 50 x 860 mm 50 x 950 mm 1000 x 1000 mm	CR900 x 900 CR1200 x 1200 CR1300 x 900 CR1500 x 900 CR1500 x 1200 CR1800 x 900	1200 x 1200 mm 1300 x 900 mm 1500 x 900 mm 1500 x 1200 mm 1800 x 900 mm
L-SHAPED (All supplied with 1 co U-SHAPED (All supplied with 2 co CRU810 x 740 x 810 810 x 74 CRU860 x 860 x 860 860 x 86 CRU950 x 950 x 950 950 x 95 CRU 1000 x 1000 x 1000 1000 x 1 CRU1150 x 1150 x 1150 1150 x 1	eiling rods & 40 x 810 mm 50 x 860 mm 50 x 950 mm 1000 x 1000 mm	CR900 x 900 CR1200 x 1200 CR1300 x 900 CR1500 x 900 CR1500 x 1200 CR1800 x 900	1200 x 1200 mm 1300 x 900 mm 1500 x 900 mm 1500 x 1200 mm 1800 x 900 mm
U-SHAPED (All supplied with 2 cd CRU810 x 740 x 810 810 x 74 CRU860 x 860 x 860 860 x 86 CRU950 x 950 x 950 950 x 95 CRU 1000 x 1000 x 1000 1000 x 1 CRU1150 x 1150 x 1150 1150 x 1	eiling rods & 40 x 810 mm 50 x 860 mm 50 x 950 mm 1000 x 1000 mm	CR900 x 900 CR1200 x 1200 CR1300 x 900 CR1500 x 900 CR1500 x 1200 CR1800 x 900	1200 x 1200 mm 1300 x 900 mm 1500 x 900 mm 1500 x 1200 mm 1800 x 900 mm
CRU810 x 740 x 810 810 x 74 CRU860 x 860 x 860 860 x 86 CRU950 x 950 x 950 950 x 95 CRU 1000 x 1000 x 1000 1000 x 1 CRU1150 x 1150 x 1150 1150 x 1	eiling rods & 40 x 810 mm 50 x 860 mm 50 x 950 mm 1000 x 1000 mm	CR1200x1200 CR1300x900 CR1500x900 CR1500x1200 CR1800x900	1200 x 1200 mm 1300 x 900 mm 1500 x 900 mm 1500 x 1200 mm 1800 x 900 mm
CRU810 x 740 x 810 810 x 74 CRU860 x 860 x 860 860 x 86 CRU950 x 950 x 950 950 x 95 CRU 1000 x 1000 x 1000 1000 x 1 CRU1150 x 1150 x 1150 1150 x 1	eiling rods & 60 x 810 mm 50 x 860 mm 50 x 950 mm 1000 x 1000 mm	CR1300x900 CR1500x900 CR1500x1200 CR1800x900	1300 x 900 mm 1500 x 900 mm 1500 x 1200 mm 1800 x 900 mm
CRU810 x 740 x 810 810 x 74 CRU860 x 860 x 860 860 x 86 CRU950 x 950 x 950 950 x 95 CRU 1000 x 1000 x 1000 1000 x 1 CRU1150 x 1150 x 1150 1150 x 1	eiling rods & 7 0 x 810 mm 0 x 860 mm 0 x 950 mm 1000 x 1000 mm	CR1500x900 CR1500x1200 CR1800x900	1500 x 900 mm 1500 x 1200 mm 1800 x 900 mm
CRU810 x 740 x 810 810 x 74 CRU860 x 860 x 860 860 x 86 CRU950 x 950 x 950 950 x 95 CRU 1000 x 1000 x 1000 1000 x 1 CRU1150 x 1150 x 1150 1150 x 1	eiling rods & 40 x 810 mm 50 x 860 mm 50 x 950 mm 1000 x 1000 mm	CR1500 x 1200 CR1800 x 900	1500 x 1200 mm 1800 x 900 mm
CRU810 x 740 x 810 810 x 74 CRU860 x 860 x 860 860 x 86 CRU950 x 950 x 950 950 x 95 CRU 1000 x 1000 x 1000 1000 x 1 CRU1150 x 1150 x 1150 1150 x 1	eiling rods & 40 x 810 mm 50 x 860 mm 50 x 950 mm 1000 x 1000 mm	R1800x900	1800 x 900 mm
CRU810 x 740 x 810 810 x 74 CRU860 x 860 x 860 860 x 86 CRU950 x 950 x 950 950 x 95 CRU 1000 x 1000 x 1000 1000 x 1 CRU1150 x 1150 x 1150 1150 x 1	eiling rods & 40 x 810 mm 50 x 860 mm 50 x 950 mm 1000 x 1000 mm		
CRU810 x 740 x 810 810 x 74 CRU860 x 860 x 860 860 x 86 CRU950 x 950 x 950 950 x 95 CRU 1000 x 1000 x 1000 1000 x 1 CRU1150 x 1150 x 1150 1150 x 1	40 x 810 mm 50 x 860 mm 50 x 950 mm 1000 x 1000 mm	fixing brackets	5]
CRU900 x 1330 x 900 900 x 13 CRU1200 x 1450 x 1200 1200 x 1	500 x 800 mm 230 x 900 mm 330 x 900 mm 1450 x 1200 mm NDOW SPANN	to order if requ to order in aro	curtain rails can be made uired. Normally made und 2 - 3 working days.
Curtain rail ceiling Spar	n a window inside 1 up to 1200 mm w	shower	
The or L plus	se kits are used in -shaped rail. Each	conjunction with a kit includes as rac g bracket, elbow br	k gasket)
FLEXIBLE RAILS			
CR3000FLEXSLV 3000mm flexible cu includes 2 x ceiling		qs.	2
CR3000FLEXWH 3000mm flexible cu			


Jubilee Series Walkin Baths

DIAMOND












- Shower screen supplied as standard
- 225 Litres capacity (unoccupied)
- Available with left or right handed door hinge
- End panel is supplied as an optional extra
- Thermostatic valve (TMV22 for high flow rate) should be used
- Compatible with bath taps or shower mixer

TEL 01886 830119 www.practicalcareproducts.com

Jubilee Series Walkin Baths

GOLDEN


- 220 Litres capacity (unoccupied)
- Available with left or right handed door hinge
- End panel is supplied as an optional extra
- Thermostatic valve (TMV22 for high flow rate) should be used
- Twin waste kit supplied as standard
- Compatible with bath taps or shower mixer

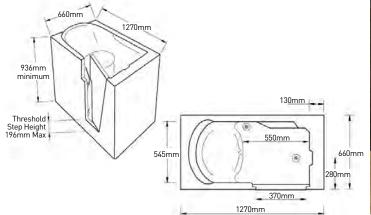



SILVER

1700/1500mm length option

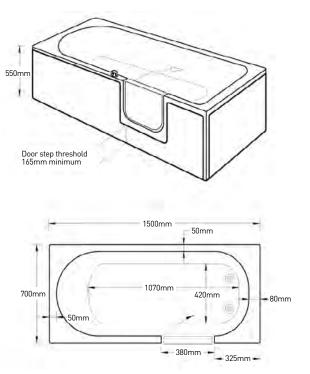



- Available with left or right handed door hinge
- End panel is supplied as an optional extra
- Thermostatic valve (TMV22 for high flow rate) should be used
- Compatible with bath taps or shower mixer
- Twin waste kit supplied as standard

Jubilee Series Walkin Baths Options

MIRA EXCEL BATH SHOWER MIXER





- Thermostatic temperature control ensures a constant and safe showering experience
- Separate flow and temperature controls
- Automatic maximum temperature reduction when

user switches from bath to shower mode

- Easy to use lever controls
- Unique inner sleeve reduces surface temperature for even more safety
- TMV2 approved
- For installation on the top of the bath
- Four spray showerhead with rub-clean rubber nozzles for easy cleaning





TEL 01886 830119 www.practicalcareproducts.com

Showering & Changing Tables

Nivano Multi-Purpose Height Adjustable Changing Tables For use in showering areas and wet rooms

- Weight capacity 200kg electric CTE
- Weight capacity 135kg battery CTB
- Bed sizes up to 1900x700mm
- Part stainless steel construction
- Suitable for use in wet areas
- Protrudes just 220mm from wall when stowed
- Special sizes available to order



CTE120	1200 long x 700 wide
CTE150	1500 long x 700 wide
CTE170	1700 long x 700 wide
CTE190	1900 long x 700 wide
GCTE120 - 190	Fold out guard

G.PROTEC	Padded Guard bumper
SPLASHLONG	Anti-splash skirt - 1m depth
MATTRESS	Removable mattress


Also available with a tilting head/back rest.

Our easy-to-operate multi-purpose height adjustable shower and changing tables come in standard lengths from 1200 to 1900mm, with a weight capacity of 200kg (electric) and 135kg (battery). Non-standard sizes are also available.

The Nivano changing table has a travel range of 700mm and can easily lift a client up from near floor level to a convenient height for washing and changing. It folds away very neatly when not in use, protruding just 220mm from the wall and features battery back-up for safe Nivano Height-adjustable Shower and Changing Tables lowering in the event of a power failure.

The unit is wall-fixed and normally also floor-standing. However, it can be fixed higher on the wall if desired, so if you want you can even have it over a bath! And we continue to offer the exceptional range of options, including head rests and padded tops – available on our CT range of changing tables. As with all our products, the Nivano table can be tailored just for you.



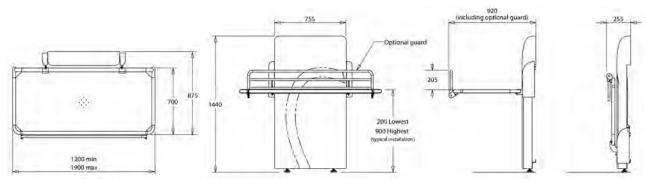

Wall and Bath Mounted Neatfold Stretcher

Wall Mounted Neatfold Stretcher



Provides a simple space saving and economical solution to changing and showering requirements in a restricted area.

WN120	Wall mounted stretcher with support legs 1200 long x 660 wide
WN150	1500 long x 660 wide
WN170	1700 long x 660 wide
WN180	1800 long x 660 wide
WN190	1900 long x 660 wide
GWM 120 - 190	Fold out guard

- Weight capacity of 130 kgs
- Painted stainless steel frame
- 1200 to 1900 mm long with special sizes available

Bath Mounted Neatfold Stretcher

All sizes manufactured in a robust white powder coated stainless steel frame with a weight capacity of 130 kgs. Neat and unobtrusive when stored, it can be deployed quickly & easily using just one hand. Comes with options including Fold Out Guard, Guard Bumper & Splash Curtain. Also available

as a bespoke manufactured fold down stretcher onto a fixed height bath.





NEATFOLD146	Integrated bath stretcher 1460 mm long
NEATFOLD166	Integrated bath stretcher 1660 mm long
NEATFOLD169	Integrated bath stretcher 1690 mm long*
NEATFOLD189	Integrated bath stretcher 1890 mm long*
BATHGUARD	Removable guard for bath stretcher
G.PROTEC.BATH	Guard bumper for bath stretcher

*These stretchers can only be used with the LTT1 low level mixer taps

SHOWERING & CHANGING TABLES

Manual Height Adjustable Changing Tables



All sizes are manufactured in a robust white powder coated stainless steel frame with a weight capacity of 112 kgs. These carer tables can be set to the height that suits each individual carer. Before the patient is hoisted onto the table bed, the carer sets the height to suit them, thereby reducing the risk of back strain. Once on the table bed, the patented mechanism makes sure that the carer cannot accidentally try to move the bed while loaded. When not in use, the CTM folds away to just 180 mm from the wall.

Available with Fold out Guard, Guard Bumper, Splash Curtain etc

CTM120	Manual height adjustable lift & lock changing table 1200 x 700
CTM150	Manual height adjustable lift & lock changing table 1500 x 700
CTM170	Manual height adjustable lift & lock changing table 1700 x 700
CTM190	Manual height adjustable lift & lock changing table 1900 x 700



TEL 01886 830119 www.practicalcareproducts.com

Shower & Changing Stretcher Options

Fold Out Guard



Guard Bumpers



Splash Curtain



- Fold Out Guard
- Guard Bumpers
- Splash Curtain
- Removable Mattress
- Padded top
- Tilting Back-rest
- Water Collection Tray (not shown)





BSW120	Body support cushion 1200 mm
BSW180	Body support cushion 1800 mm

Removable Mattress



Padded top with tilting back-rest (for Nivano only)




Padded top with tilting back-rest

(back-rest also available for HT stretcher) N.B. Padded top not available for CTM and Neatfold Water Collection Tray (not shown). N.B. Water collection tray not available for CTM, CTE, CTB and Neatfold or with padded tops Options.

Rise & Fall Baths

- UK manufactured, electrically operated Rise & fall baths for adults & children with a maximum weight capacity of 250 kgs (Rio) and 280 kgs (Kiva)
- Supremely quiet in operation due to a highly engineered mechanism which also contributes to unrivalled stability when in use.
- Installed and commissioned by the manufacturer with a 3 year warranty
- Easy access for floor & ceiling hoists
- Height adjustable from 700 1000 mm.
- Easy safe & comfortable working height for a carer to avoid the risk of back strain.

RIO

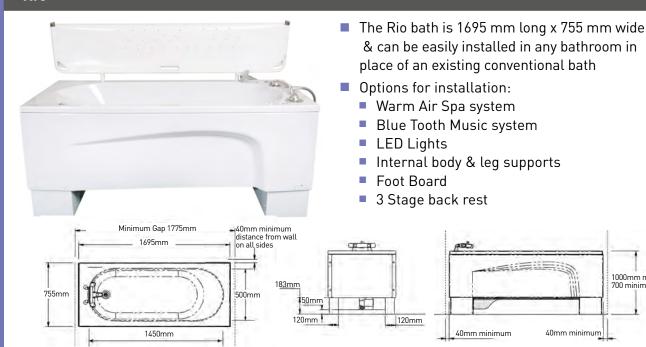

KIVA

RISE & FALL BATHS




The KIVA bath is 1960 mm long x 765 mm wide, with a maximum internal dimension of 1742 x 604 mm

1000mm maximum

700 minimum

- Options for installation:
 - Over bath Neatfold stretcher
 - Warm Air Spa system
 - Blue Tooth Music system
 - LED Lights
 - Internal body & leg supports
 - Foot Board

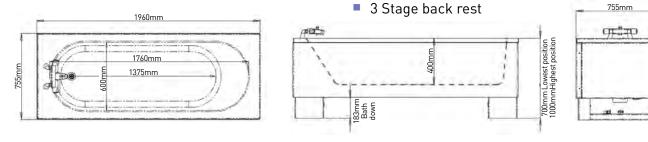

Rise & Fall Baths

- Supremely quiet in operation due to a highly engineered mechanism which also contributes to unrivalled stability when in use.
- Easy access for floor & ceiling hoists

VANNA High-low bath

- UK manufactured, this is the latest design of the higher dependency bath with electrically operated rise & fall mechanism, for adults & children.
- With a robust construction, it has a maximum weight capacity of 300 kgs.
- The Vanna bath comes in 4 lengths, 1700 / 1900 / 2100 & 23000mm long x 830mm wide and designed to be free standing.
- Fully height adjustable from 780 – 1180 mm.
- Handset operation with a powered side lowering entrance door

- Installed and commissioned by the manufacturer with a 3 year warranty
- Easy safe & comfortable working height for a carer to avoid the risk of back strain.
- Options for installation:
 - Over bath Neatfold stretcher
 - Warm Air Spa system
 - Blue Tooth Music system
 - LED Lights
 - Internal body & leg supports
 - 3 Stage back rest

- UK manufactured, this is the latest and largest design of electrically operated Rise & fall baths for adults & children.
- With a Double Thermo insulated construction, it has a maximum weight capacity of 300 kgs.
- Now it is also available to purchase as a fixed height bath with two optional height settings
- Height adjustable from 680 1080mm.
- The Avero bath is 2100mm long x 800mm wide and designed to be free standing.
- Options for installation:
 - Over bath Neatfold stretcher
 - Warm Air Spa system
 - Blue Tooth Music system
 - LED Lights

- Internal body & leg supports
- Foot Board
- Grab handles
- 3 Stage back rest

www.practicalcareproducts.com TEL 01886 830119

Clos-o-Mat Palma Vita

A versatile and durable shower toilet

The Clos-o-Mat Palma Vita automatic shower toilet allows less able people an increased level of privacy, independence and freedom. This toilet provides flushing, washing and warm air drying in one simple operation.

It is user friendly and an ideal choice for someone who has restricted use of their hands; one press of the flush pad by hand, elbow or body pressure triggers the operation cycle. Reduced hand contact provides improved hygiene for all users and this toilet can be used as a standard toilet at all times.

Key features

- Simultaneous flushing and washing (a unique feature)
- Improved personal hygiene cleaning with water not paper
- Can be used at all times as a conventional WC
- Combines functions of a WC and bidet with addition of drying air
- UK made in a dedicated plant
- Clos-o-Mat's unique one-touch system allows the user to benefit from the toilet's automatic functions by just pressing and releasing the elbow pad
- Simple 'hands free' action automatic flushing, warm water washing and warm air drying
- User-friendly system guarantees the most hygienic toilet performance
- Customised to suit individual needs
- Installation and service support available
- Almost 40,000 shower toilets installed in the UK
- Complies with current electrical regulations
- Maximum load 190 Kg





HOW IT WORKS

Flushing

Press either elbow pad whilst standing for conventional flushing.

Washing

Press elbow pad whilst seated and hold down for approximately 10-15 seconds, flushing and warm water washing will then take place. Wash time is adjustable to clients needs.

Drying Warm air drying


automatically follows when the elbow pad is released.

TEL 01886 830119 www.practicalcareproducts.com

Clos-o-Mat Palma Vita

OPTIONAL EXTRAS

There is a range of accessories available, including toilet plinths (1), lateral body supports (2), alternative douche arms (3), soft seats (4), integrated fold-down support arms (5) and a touch sensitive hand/foot switch (6). For more information please contact us on 01886 830119.

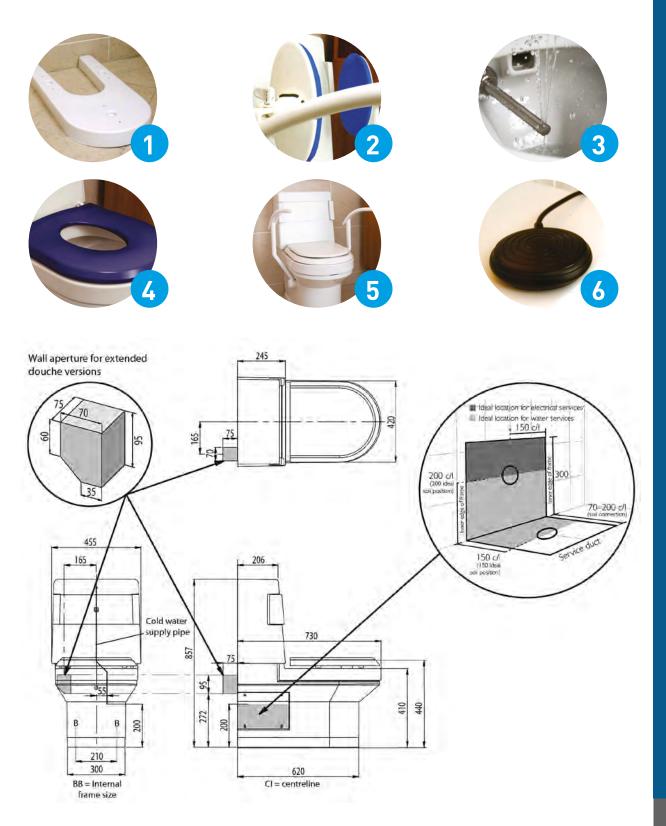

Geberit AquaClean 8000 Care

A versatile and sleek shower toilet

Perfect for those who wish to maintain independence and privacy in the bathroom, the AquaClean 8000 Care shower toilet by Geberit combines all the functions of a conventional WC and bidet with the comfort of warm-air drying.

Key features

- Warm, fresh water shower Air purification 3 with oscillating and pulsating spray mode for thorough and gentle cleaning
- Warm water Lady Shower Supplied through a separate water feed to eliminate the risk of cross contamination
- Dryer Fully extendable with unlimited duration to suit you
- Adjustable spray arm position
- Air purification
- Disinfected shower nozzle
- Strengthened ergonomic seat
- Remote control
 For individual adjustments
- Hands-free remote
- Individual temperature adjustment Water and dryer temperature adjustable to suit the user's liking
- Automatic flush Convenient remote flushing
- Seat height adjustable A built-in plinth allows for seat height adjustments from 405mm – 525mm at installation
- Soft seat option available
- Seat with lid option available
- Warranty
 2 years as standard. Extended warranty is available on request







Remote for personalised settings

Hands-free remote

Personalised comfort

With the remote control, you can tailor the settings of the AquaClean 8000 Care to specific needs and then save them under three separate profiles – so anybody who uses the shower toilet can enjoy the optimum experience based on their preferences and once saved the settings can be picked up by the infra-red or control panel, ensuring fuss-free individual adjustment when required. The unit also includes a button for remote flushing.

Geberit AquaClean 8000 Care

Total control at your fingertips

A simple touch to the easily located push-button control panel is enough to start the automatic preset sequence of washing and drying. No additional effort is required – perfect for people who might otherwise experience difficulty in the bathroom.

Touch-free operation

With the infra-red remote, using the AguaClean 8000 Care can be completely hands-free. A sensor simply detects movement and automatically starts the washing and drying sequence. All functions will only operate when a user is present. It will even flush the WC before the wash cycle - easy, private and convenient.

OSCILLATING AND PULSATING SHOWER



The shower arm extends from its protected position and a gentle, oscillating and pulsating spray of fresh, warm water washes thoroughly, before gradually cooling for a refreshing feeling. The temperature can be adjusted as required for a uniquely pleasant and hygienic experience, even for the most sensitive skin. The arm also features a separate Lady Shower for the ultimate in gentle cleansing.



THE DRYER




Once washing is complete, the AquaClean 8000 Care gently and quietly dries with a flow of pleasantly warm air. Drying is completed in minutes leaving you feeling fresh, clean and confident. Irritating and inconvenient toilet tissue can be a thing of the past.

THE CLEANING SYSTEM



Once finished, the retracted shower nozzle is soaked and rinsed with fresh water and disinfectant before and after each use to ensure spotless cleanliness at all times.

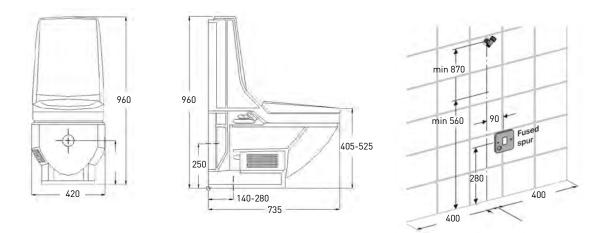


Includes: floor standing WC ceramic with ceramicplus®, plastic casing, remote control, infra-red remote, fastening material and connection parts, waste fitting, isolation valve 1/2" BSP.

Features: warm water shower, dryer, air purification, Lady shower, seat height adjustable at installation, dual flush, remote flushing, adjustable shower and dryer arm settings.

Raised Height Toilets

WCRPCC/CIST/L Raised height - Close Coupled

WCCISTLLLEV Paddle Lever Handle



Raised height low level WC pan -455mm (approximately 485mm when toilet seat fitted). Low - level cistern with paddle lever handle and cistern fittings.


European manufacturer designed for UK market.

WRAS approved flush mechanism.

LACB (LANTAC) compliant for Doc M Packs.








WCRPLL/CIST/L Raised height - Low Level



(approximately 485mm when toilet seat fitted). Low - level cistern with paddle lever handle and cistern fittings.


European manufacturer designed foe UK market. WRAS approved flush mechanism.

LACB (LANTAC) compliant for Doc M Packs.









WCBSEAT&LIDWH/BL Toilet Seat



Toilet seat with lid and cross bar hinge. Retaining buffers prevent lateral movement. Available in white or blue.



216 WCRPLLBPAD Padded Back Support Raised height low level WC pan – 455mm



Wash Hand Basins

"Atlas Range"

WHBATLASP Full pedastal

The Atlas wash hand basin offers contemporary style with crisp clean lines that are designed for the demands of every day with value for money without compromising quality. Our range offers 3 size options: 450, 500 and 550mm width. Each basin is available with the choice of one or two tap holes and is suitable for use with a semi pedestal or a full pedestal.

WHBATLASSP Semi pedastal



Size	Code	Width	Depth	Projection
Atlas 45 (450 x 390)	WHBATLAS45 (2 tap holes)	452mm	122mm	383mm
	WHBATLAS45M (1 tap hole)			
Atlas 50 (500 x 426)	WHBATLAS50 (2 tap holes)	500mm	127mm	410mm
	WHBATLAS50M (1 tap hole)			
Atlas 55 (550 x 475)	WHBATLAS55 (2 tap holes)	548mm	159mm	463mm

WHBCARE65 Concave Care Basin

WHBCON60SP Concave Basin



	Code
Concave Basin	WHBCARE65
Fixed Bracket (white)	WHBCAREFIXWH
Fixed Bracket (chrome)	WHBCAREFIXCHR
Pneumatic Tilt Bracket	WHBCARETILT


The Concave care basin has been designed for the home rather than the commercial bathroom. Contemporary in style and manufactured in Europe, this basin can be installed at a fixed height or with the optional pneumatic system which allows the user to tilt the basin to their comfort needs.

The concave care basin has a single tap hole. Optional extras include; Mono bloc tap, Click Clack waste, Bottle trap and Flexible waste pipe (for use with the pneumatic tilting mechanism). See page 86 for details.



Concave basin semi pedestal Concave basin full pedestal Code WHBCON60SP WHBCON60FP

Fixed height concave wash hand basin. Monoblock tap hole with semi pedestal as standard. Also available with a full pedestal if required. Waste, plug & chain supplied, taps are extra.



Taps and Waste for wash hand basins

We offer a range of taps to compliment the wash hand basins

WHBLT Value lever 1/2" basin taps



Value lever $\frac{1}{2}$ " basin taps, chrome finish. Tap bodies are of all brass construction. $\frac{1}{4}$ turn $\frac{1}{2}$ " ceramic disc valve. Supplied with 3" metal levers.

WHBLTM2L Value 2 lever mono bloc basin



Value 2 lever mono bloc basin mixer tap with pop up waste. Tap bodies of all brass construction. $\frac{1}{2}$ turn $\frac{1}{2}$ " ceramic disc valve. Supplied with 3" metal levers.

WHBLTM1LMV3 Single lever TMV3 approved mono bloc basin mixer tap




Single lever TMV3 approved mono bloc basin mixer tap with progressive cartridge. The _____ flow regulator works by restricting the flow of water to a specific flow rate that helps save water without compromising performance.

WHBLQT Quality lever 1/2" basin taps



Quality lever $\frac{1}{2}$ " basin taps, contemporary style, chrome finish. Tap bodies are of all brass construction. $\frac{1}{4}$ turn $\frac{1}{2}$ " ceramic disc valve.

WHBLTM1L Quality lever mono bloc basin mixer tap



Quality lever mono bloc basin mixer tap, contemporary style, chrome finish. Tap bodies are of all brass construction. $\frac{1}{4}$ turn $\frac{1}{2}$ " ceramic disc valve.

WHBWPC

WHBWCC



Chrome waste with chain and plug.



Chrome slotted click/clack waste.

TMV3-15



A failsafe mixing valve with automatic shutoff, ensures safe hot water supply to the basin.

15mm compression fittings.





McAlpine E10 white bottle trap.

MCALPFLEXCON1



Flexible waste pipe for wash hand basin, (suitable for use with the pneumatic tilting mechanism.

Doc M Toilet Pack



Key features

- Refreshed Image for new design Sanitaryware
- Now available as Seat only or Seat with Cover
- Luxury Polished Stainless Steel Rails
- Luxury Polished Friction Hinge Arm
- Toilet Seat with lateral movement buffers
- LABC Approved
- WRAS Approved Fittings

STANDARD CLOSE COUPLED Available with blue or white rails



Close coupled Doc M pack includes:

- Comfort Height WC
- Paddle flush handle
- Ring seat
- Two tap hole basin with plastic waste
- Mono block tap
- 4 x 600 mm long grab rails
- Drop Down Hinged Support rail

STANDARD LOW LEVEL



Low Level Doc M pack includes:

TOILETS

- Comfort Height WC
- Back Support Pad
- Paddle flush handle
- Ring seat
- Two tap hole basin with plastic waste
- Mono block tap
- 4 x 600 mm long grab rails
- Drop Down Hinged Support rail
- Available with blue
- or white rails

LUXURY CLOSE COUPLED



Close Coupled Doc M pack includes:

- Comfort Height WC
- Paddle flush handle
- Ring seat
- Two tap hole basin with plastic waste
- Mono block tap
- 4 x 600 mm long Luxury stainless steel grab rails
- Stainless Steel Drop Down Hinged Support rail"

Static Commodes

STATIC COMMODE 1



- Plastic coated steel frame
- Padded seat and backrest
- Removable round plastic
- bowl with lid
- Stackable
- Max. user wt. 133 kgs

STATIC COMMODE 2



- Powder coated dark blue frame
- Detachable arms
- Adjustable height
- Clip on toilet seat for easy
- cleaning
- Light blue padding to seat and backrest
- Removable round plastic bowl with lid and handle
- Stackable
- Max. user wt. 125 kgs

COMMODES

STATIC COMMODE 3



- Plastic coated steel frame
- Adjustable height
- Padded seat and backrestRemovable round plastic
- bowl with lid.
- Stackable
- Max. user wt. 133 kgs

STATIC COMMODE 4

- Chromium plated steel frame
 Drop down detachable arm
- Drop down detachable al rests
- Moulded polypropylene seat
- Plastic bowl
- Flame retardant upholstered
- over seat and backrest
- Max user wt. 155 kgs

STATIC COMMODE 4AD

As per Static Commode 4 but with adjustable height legs.

• Max user wt. 155 kgs

Mobile Commodes

COMMODE 1



- Chrome plated steel frame
- Detachable arms
- 4 swivel brake castors
- Padded blow moulded seat
- Removable back
- Removable bowl with lid
- Can be wheeled over a
- standard toilet
- Max user wt. 125 kgs

COMMODE 1 + FOOTREST



COMMODE 2 + FOOTREST

- Chrome plated steel frame
- Detachable arms
- 4 swivel brake castors
- Padded blow moulded seat
- Removable back
- Removable bowl with lid
- Can be wheeled over a
- standard toilet
- Hook on footrests
- Max user wt. 125 kgs

COMMODE 2



- White plastic coated steel
- frame • Detachable easy clean seat
- Detachable back & armrests
- Removable square plastic bowl
- 4 brake casters
- Padded seat, backrest and
- arms
- Toilet roll holder
- Can be wheeled over a
- standard toilet
- Maximum user weight: 160kgs



- White plastic coated steel frame
- Detachable easy clean seat
- Detachable back & armrests
- Removable square plastic

bowl

- 4 brake casters
- Padded seat, backrest and arms
- Toilet roll holder
- Can be wheeled over a
- standard toilet
- Footrest
- Maximum user weight:
- 160kgs

COMMODE 3



- Chromium plated steel frame
- 4 brake castors
- Drop down arm rests
- Moulded polypropylene seat
- Plastic bowl with lid
- Flame retardant upholstered
- over seat and backrest
- Max user wt. 155 kgs

PUSH ON FOOTRESTS AVAILABLE

COMMODE 3AD

As per Commode 3 but with adjustable height legs. • Max user wt. 125 kgs

PUSH ON FOOTRESTS AVAILABLE

Toilet Plinths


Used to raise the height of toilet pans for users with limited mobility. Versatile designs will suite most standard toilet pans enabling quick and easy installation without the need to buy a special unit.

Product	Ref

TP50	50 mm height
TP75	75 mm height
TP100	100 mm height
TP50BW	50 mm height, back to wall design
TP75BW	75 mm height, back to wall design
TP100BW	100 mm height, back to wall design


TP50 50 mm height

TP75 75 mm height



TP100 100 mm height








389mi

TP50/75/100BW back to wall design

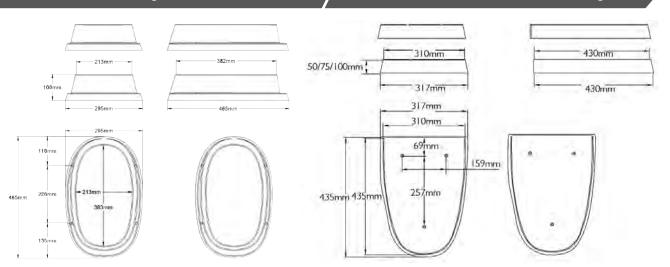

Terms & Conditions

1. Risk

- 1.1 The goods are at your risk from the time of delivery
- 1.2 Delivery takes place either; 1.2.1 at our premises (if you are collecting); or 1.2.2 at your premises or address specified by you (if we are arranging carriage)
- 1.3 You must inspect the goods on delivery. If any goods are damaged (or not delivered) you must write to tell us within two days of delivery (or the expected delivery time) You must give us (and any carrier) a fair chance to inspect the damaged goods.

2. Payment Terms

- 2.1 You are to pay us in cash or otherwise in cleared funds prior to delivery, unless you have an approved credit account.
- 2.2 If you have an approved credit account, payment is due no later than 30 days from end of the month of invoice unless otherwise agreed in writing.
- 2.3 If you fail to pay us in full on the due date:
 - 2.3.1 we may suspend or cancel future deliveries;
 - 2.3.2 we may cancel any discount offered to you;
 - 2.3.3 we may ask you to pay us interest at the rate set under s.6 of the late payment of commercial debts (interest) Act 1998
 - (a) calculated (on a daily basis) from the date of our invoice until payment (b) compounded on the first day of each month; and
 - (c) before and after any judgement (unless a court orders otherwise); 2.3.4. we may claim fixed sum compensation from you under s.5A of that Act to cover our credit control overhead costs; and
 - 2.3.5 we may recover the cost of taking legal action to make you pay
- 2.4 If you have an approved credit account, we may withdraw or alter your credit limit without notice.
- 2.5 You do not have the right to set off any money you may claim from us against anything you may owe us.
- 2.6 While you owe money to us, we have a lien on any of your property in our possession.
- 2.7 You are to indemnify us in full and hold us harmless from all expenses and liabilities we may incur (directly or indirectly including financing costs and including legal costs on a full indemnity basis) following any breach by you of any of your obligations under these terms.

3 Title

- 3.1 Until you pay all debts you may owe us:
 - 3.1.1 all goods supplied by us remain our property;
 - 3.1.2 you must store them so that they are clearly identifiable as our property; 3.1.3 you must include them in your company insurance cover against theft or
 - damage
 - 3.1.4 you may use those goods and sell them in the ordinary course of your business, but not if;
 - a. we revoke that right (by informing you in writing); or
 b. you become insolvent
 - 3.2 You must inform us (in writing) immediately if you become insolvent.
 - 3.3 If your right to use and sell the goods ends you must allow us to remove the goods.
- 3.4 We have your permission to enter any premises where the goods may be stored. 3.4.1 at any time to inspect them; and 3.4.2 after your right to use and sell them has ended, to remove them using reasonable force if necessary.
- 3.5 Despite our retention of title to the goods, we have the right to take legal proceedings to recover the price of the goods supplied should you not pay us by the due date.

4. Warranties

- 4.1 We warrant that the goods will:
 - 4.1.1 comply with their description on our order confirmation form; and
 4.1.2 be free from material defect for the period indicated in this brochure or 12 months from the date of delivery [as long as you comply with clauses 4.3 and 4.4] whichever is the longer.
- 4.2 We give no other warranty (and exclude any warranty, term or condition that would otherwise be implied) as to the quality of the goods or their fitness for any purpose.
- 4.3 You must ensure that;
 - 4.3.1. the goods are not modified or defectively installed;
 - 4.3.2 the goods are used and operated in accordance with any instructions that may have been notified to you;
 - 4.3.3 you have taken reasonable steps to draw to the attention of all persons using or proposing to use the goods, of all information instructions and warnings in respect of the goods supplied.
- 4.4 If you believe that we have delivered goods which are defective in materials or workmanship, you must;
 - 4.4.1 inform us (in writing) with full details, as soon as possible; and 4.4.2 allow us to investigate (we may need access to your premises and product supplied)
- 4.5 If the goods are found to be defective in material or workmanship (following our investigations, and you have complied with those conditions (in clauses 4.3 and 4.4) in full, we will (at our option) repair or replace the goods

- 4.6 We are not liable for any other loss or damage (including indirect or consequential loss, financial loss, loss of profits or loss of use) arising from the contract or the supply of goods or their use, even if we are negligent.
- 4.7 Our total liability to you (from one single cause) for damage to property caused by our negligence is limited to two million pounds.
- 4.8 For all other liabilities not referred to elsewhere in these terms our liability is limited to damages to the price of the goods,

5 Specification

- 5.1 We reserve the right to make any changes in the specification of our goods which are necessary to ensure they conform with any applicable safety or other statutory requirements.
- 5.2 We also reserve the right to make without notice any minor modifications in our specifications we think necessary or desirable.
- 5.3 Any weights, dimensions, capacities, ratings and general description contained in our catalogues, advertising material are illustrative only and will not form any part of the contract between us.
- 5.4 You must pass onto any person using or proposing to use the goods any information or instructions supplied by us regarding the use, safe handling or
- installation of the goods. 5.5 You must observe and adhere to any information, instructions or recommendations regarding the goods and must not use, modify or install the goods in a manner which has not been approved by us.
- 6 Return of goods

We will accept the return of goods from you only; 6.1 by prior arrangement (confirmed in writing) and; 6.2 where the goods are as fit for sale on their return as they were on delivery

7. Waiver and variations

- 7.1 Any waiver or variation of these terms is binding in honour only unless: 7.1.1 made (or recorded) in writing;
- 7.1.2 signed on behalf of each party; and
- 7.1.3 expressly stating an intention to vary these terms.
- 7.2 All orders that you place with us will be on these terms (or any that we may issue to replace them) By placing an order with us, you are expressly waiving any printed terms you may have to the extent that they are inconsistent with our terms.

8. Force majeure

- 8.1 If we are unable to perform our obligations to you (or able to perform them only at unreasonable cost) because of circumstances beyond our control, we may cancel or suspend any of our obligations to you, without liability.
- 8.2 Examples of those circumstances include act of God, accident, explosion, war, terrorism, fire, flood, transport delays, strikes, and other industrial disputes and difficulty in obtaining supplies.

9. General

- 9.1 English law is applicable to any contract made under these terms. The English and Welsh courts have non-exclusive jurisdiction.
- 9.2 If you are more than one person, each of you has joint and several obligations under these terms.
- 9.3 If any of these terms are unenforceable as drafted: 9.3.1 it will not affect the enforceability of any other of these terms; and 9.3.2 if it would be enforceable if amended it will be treated as so amended.
- 9.4 We may treat you as insolvent if;
 - 9.4.1 you are unable to pay your debts as they fall due; or
 - 9.4.2 you (or any item of your property) become the subject of: a. any formal insolvency procedure (examples of which include
 - receivership, liquidation, administration, voluntary arrangements (including a moratorium) or bankruptcy):
 - b. any application or proposal for any formal insolvency procedure; or
 - c. any application, procedure or proposal overseas with similar effect or purpose.
- 9.5 All brochures, catalogues and other promotional materials are to be treated as illustrative only. Their contents form no part of any contract between us and you should not rely on them in entering into any contract with us.
- 9.6 Any notice by either of us which is to be served under these terms may be served by leaving it at or by delivering it to (by first class post or by fax) the other's registered office or principle place of business. All such notices must be signed.
- 9.7 No contract will create any right enforceable (by virtue of the Contract (Right of Third Parties) Act 1999) by any person not identified as the buyer or seller.
- 9.8 Nothing in these terms affects or limits our liability for fraudulent misrepresentation.



Get in touch

Telephone 01886 830119

Facsimile 01886 830118

Email info@practicalcareproducts.com

Website www.practicalcareproducts.com

Practical Care Products Ltd

Upper Interfields Leigh Sinton Road Malvern Worcestershire WR14 1UT